

MEAN WELL DRIVER


NOTES & WARNINGS

- Compatible with all Flexfire LED Strip Lights
- IP67 or IP65 designed for indoor or outdoor use
- Suitable for dry, damp, and wet location
- Recommended to be installed in a well ventilated area
- Not compatible with AC in AC out dimmers such as Lutron, Legrand, Leviton dimmers
- Do not modify (cut, rewire, open) this power supply in any way



ELECTRICAL PARAMETERS

TECHNOLOGY	Electronic
INPUT VOLTAGE	Universal AC input / Full range (up to 305 VAC)
OUTPUT VOLTAGE	12VDC
WATTAGE	150 Watts
MAX AMPERAGE	12.5A
PRIMARY BREAKER (AC)	None
SECONDARY BREAKER (DC)	None
RESET	Automatic
LOAD CAPACITY	Up to 90% load
KNOCK-OUT HOLES	None
EFFICIENCY	91.50%

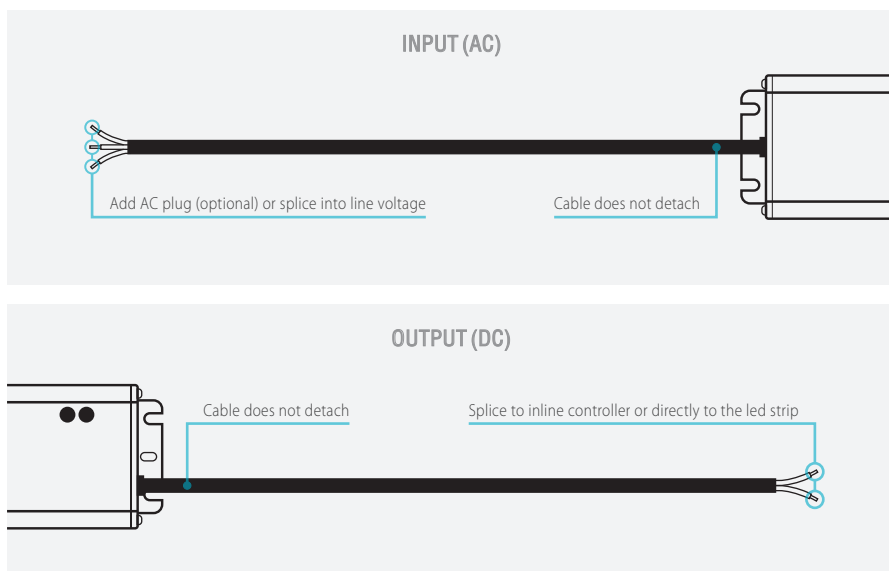

TRANSFORMER

- Power supply is converting AC power to DC power.
- Operational Temperature Range: 40°C - +70°C
- Installation Options: Horizontal, Vertical

HOUSING

- Fully encapsulated with IP65 or IP67 level
- Metal case with plastic components