


PRECAUTION: Please read all instructions carefully before installation.

The Vital[™] 100 LED Strip Light is a straightforward and affordable solution that delivers basic, extra-low-profile lighting without cutting corners. Available in warm and cool white, its subtle brightness is ideal for homes and businesses that call for simple yet effective hints of light. It's ideal for layered cove and accent lighting or spaces that need a gentle mood boost.



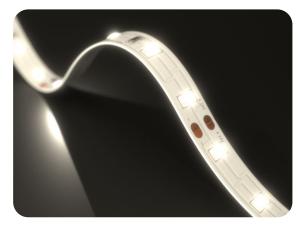

7 Year Warranty








Product Features

24V DC Voltage 1.2 W/ft (3.9 W/m) Wattage Up to 100 lm/ft (327 lm/m) **Brightness Efficacy** Up to 82 lm/W CRI High CRI up to 95 18 LEDs/ft (60 LEDs/m) **Number of LEDs** 120° **Beam Angle LED Pitch** 5/8" (16 mm) Strip Width 3/8" (10 mm) **Cutting Points** 4" (100 mm) Max Run Length in Series 46 ft (14 m) PCB 2 oz Copper **LED Size** 3528 3M VHB 4930 **Adhesive Type** -4°F to 104°F (-20°C to 40°C) **Ambient Temperature Operating Temperature** -4°F to 140°F (-20°C to 60°C) Dimmable **IP Rating** IP20: Indoor, Dry Location

Ordering Code

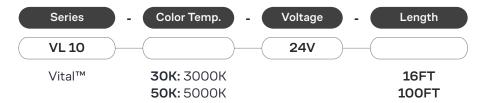

Example: VL10-30K-24V-16FT

Dimensions



Product Specifications

Product SKU	Color* (CCT)	Watts/Foot (Meter)	Lumens/Foot (Meter)	Luminous Efficacy (Lumens/Watt)	CRI	Gamut Score (Rg)	Relative Fidelity Score (Rf)
VL10-30K	3000K	1.2 W/ft (3.9 W/m)	100 lm/ft (327 lm/m)	82	93	99	90
VL10-50K	5000K	1.2 W/ft (3.9 W/m)	95 lm/ft (313 lm/m)	80	95	99	89

Complete Your Setup



Compatible Drivers (24V)

		Non-dimmable			
Power Supply	Diagram	LED Strip Length	Product SKU	Watts	Class 2
Plug-In	1	1-45 ft	24V-WMPS2-1	24W	X
Power Supply Plug-and-Play Power Supply		17-64 ft	24V-DPS2-4	96W	X
		1-45 ft	HLG-60H-24A	60W	X
Mean Well™ HLG		46-72 ft	HLG-100H-24A	96W	X
	Mariante de la	73-138 ft	HLG-185H-24A	185W	
Hardwired Power Supply		139-240 ft	HLG-320H-24A	320W	
		241-450 ft	HLG-600H-24A	600W	
Mean Well™ LPV	Jan 1				
Hardwired Power Supply	A Contract of the last	1 - 42 ft	LPV-60-24	60W	Χ

		Dimmable			
Power Supply	Diagram	LED Strip Length	Product SKU	Watts	Class 2
Zurik® EMLV		1-22 ft	ZRK-EMLV2-30W-24VDC	30W	X
Hardwired Power Supply		23-45 ft	ZRK-EMLV2-60W-24VDC	60W	X
		1-22 ft	ZRK-UNV-30W-24VDC	30W	X
		23-45 ft	ZRK-UNV-60W-24VDC	60W	X
		46-72 ft	ZRK-UNV-96W-24VDC	96W	X
Zurik® Universal		73-90 ft	ZRK-UNV-120W-24VDC	120W	
Hardwired Power Supply		91-150 ft	ZRK-UNV-200W-24VDC	200W	
That a winder Tower Supply		151-225 ft	ZRK-UNV-300W-24VDC	300W	
		1-144 ft (up to 72ft/output)	ZRK-UNV-C384W-24VDC	384W	X
Lutron®		1 - 72 ft	L3D0-96W24V-U	96W	Χ
Hi-Lume™ Premier Hardwired Power Supply	· Hilling	Dimming Range: 0.1-100%			

Compatible Controllers & Dimmers




See Controllers and Dimmers


Compatible Strip Light Connectors

Product SKU	Diagram	Description	Wire Gauge	Amperage Limit*
GRIP-SC-C1-10-0		Connector with no wire to attach the strip to wire.	-	
GRIP-SC-C1-10-12		Connector with 12" or 36" of wire to attach the strip to a power supply or		
GRIP-SC-C1-10-36		low voltage control.	22 AWG	
GRIP-SC-C2-10-06		Jumper connector with 6" of wire to attach two sections of strip together. Wire allows to go around tight corners.	22,,,,,	5 Amps
GRIP-SC-C3-10-0		Jumper connector with no wire to attach sections of strip together in a continuous run.	_	
GRIP-SC-CNR-10-5		Corner connector for 90 degree turns.		


*Make sure no more than 5 amps are drawn after any solderless connector. Calculate max length of strip light to follow the solderless connector based on an amperage draw of 0.05 A/ft (0.16 A/m) at 24 volts.



Strip Light Connectors Installation




Peel off 1/4" of the 3M adhesive (both the tape and release paper) from the end of the strip that you want to connect. It must be removed to allow it to fit properly with the solderless connector.



Check the polarity of the strip to match the positive (+) markings together and negative (-) markings together. If you accidentally close the connector before you're ready, use a small flathead screwdriver to pry the top back open.



Open the top of the grip connector and insert the LED strip inside. Make sure the LED strip is facing up towards the translucent top and the solder pads are directly above the small hooks on the connector.



Once everything is in order, use pliers to close and lock the connector. You'll hear a "click" sound when it is properly closed.


NOTE: Soldering is the preferred method. If you need further assistance, please download our Solderless Connector Installation Guide from our website.

Compatible Aluminum Channel Kits


Diagram	Name	Туре	Channel Kit Description	Kit SKU	Included Accessories
					
	lon™	Surface Mount	1 Meter Ion Channel	ION-CH-A-1M	
			1 Meter Channel + Clear Cover Kit	GEM-CH-A-CVR-C-1M	
			2 Meter Channel + Clear Cover Kit	GEM-CH-A-CVR-C-2M	0.000 - 500 - 1.000 -
		1 Meter Channel + Frosted Cover Kit	GEM-CH-A-CVR-F-1M	2 Open End Caps 2 Closed End Caps	
	Gemini™	Surface	2 Meter Channel + Frosted Cover Kit	GEM-CH-A-CVR-F-2M	4 Mounting Clips
		Mount	1 Meter Channel + Matte Cover Kit	GEM-CH-A-CVR-M-1M	
			2 Meter Channel + Matte Cover Kit	GEM-CH-A-CVR-M-2M	
			1 Meter Channel + Clear Cover Kit	KEP-CH-A-CVR-C-1M	2 Open End Cone
		-	1 Meter Channel + Frosted Cover Kit	KEP-CH-A-CVR-F-1M	2 Open End Caps 2 Closed End Caps
Kepler™	Surface	1 Meter Channel + Matte Cover Kit	KEP-CH-A-CVR-M-1M	4 Mounting Clips	
		Mount	Note: Compatible only without connectors.		
			1 Meter Channel + Clear Cover Kit	LAI-CH-A-CVR-C-1M	
			1 Meter Channel + Frosted Cover Kit	LAI-CH-A-CVR-F-1M	2 Open End Caps 2 Closed End Caps
	Laika™	Surface	2 Meter Channel + Frosted Cover Kit	LAI-CH-A-CVR-F-2M	4 Mounting Clips
		Mount		L/(1 011 / 1 0 V (1 2 V)	4 Woulding Olips
			Note: Compatible only without connectors.		
			1 Meter Channel + Clear Cover Kit	TTN-CH-A-CVR-C-1M	2 Open End Caps
			1 Meter Channel + Frosted Cover Kit	TTN-CH-A-CVR-F-1M	2 Closed End Caps
			2 Meter Channel + Frosted Cover Kit	TTN-CH-A-CVR-F-2M	4 Mounting Clips
		 _ ↓ Surface	1 Meter Channel + Matte Cover Kit	TTN-CH-A-CVR-M-1M	6 Channel Connector
Titan™	Titan™		2 Meter Channel + Matte Cover Kit	TTN-CH-A-CVR-M-2M	
		Mount	1 Meter Channel + 10 Meter Frosted Cover Kit	TTN-CH-A-CVR-F-10MR	10 Open End Caps 10 Closed End Caps 20 Mounting Clips
			1 Meter Channel + 10 Meter Matte Cover Kit	TTN-CH-A-CVR-M-10MR	30 Channel Connector
			1 Pendant Kit	TTN-PND-KIT	2 Pendant Mounts with Screws
			1 Meter Channel + Clear Cover Kit	ATL-CH-A-CVR-C-1M	
		۵_	1 Meter Channel + Frosted Cover Kit	ATL-CH-A-CVR-F-1M	2 Open End Caps
A.	Atlas™	s™ Angled Surface Mount	2 Meter Channel + Frosted Cover Kit	ATL-CH-A-CVR-F-2M	2 Closed End Caps
			1 Meter Channel + Matte Cover Kit	ATL-CH-A-CVR-M-1M	4 Mounting Clips
			2 Meter Channel + Matte Cover Kit	ATL-CH-A-CVR-M-2M	
			1 Meter Channel + Frosted Cover Kit	CAL-CH-A-CVR-F-1M	0.000 - 0.00 - 0.000
Calvo			2 Meter Channel + Frosted Cover Kit	CAL-CH-A-CVR-F-2M	2 Open End Caps 2 Closed End Caps
		D	1 Meter Channel + Matte Cover Kit	CAL-CH-A-CVR-M-1M	4 Mounting Clips
	Calypso™	Recessed	2 Meter Channel + Matte Cover Kit	CAL-CH-A-CVR-M-2M	
500	Calypso	Recessed	1 Meter Channel + 10 Meter Frosted Cover Kit	CAL-CH-A-CVR-F-10MR	10 Open End Caps 10 Closed End Caps
			1 Meter Channel + 10 Meter Matte Cover Kit	CAL-CH-A-CVR-M-10MR	20 Mounting Clips 30 Channel Connector
			1 Meter Channel + Clear Cover Kit	CAS-CH-A-CVR-C-1M	
			1 Meter Channel + Frosted Cover Kit	CAS-CH-A-CVR-F-1M	2 Open End Caps
	Cassini™	Recessed	2 Meter Channel + Frosted Cover Kit	CAS-CH-A-CVR-F-2M	2 Closed End Caps
			1 Meter Channel + Matte Cover Kit	CAS-CH-A-CVR-M-1M	4 Mounting Clips
			2 Meter Channel + Matte Cover Kit	CAS-CH-A-CVR-M-2M	

Wiring Diagrams

120V Wall Dimmer

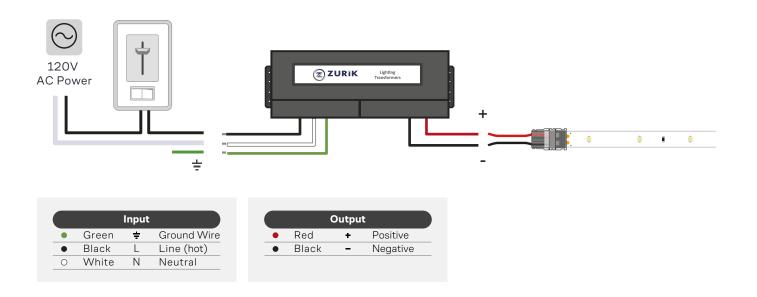

In-Line Dimming

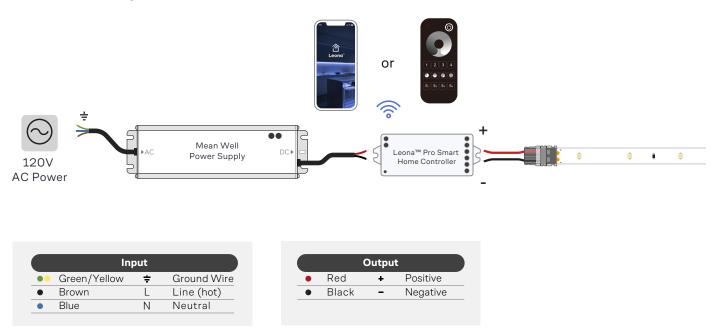

Safety And Disclosures

- **01.** Installation must comply with local and national electrical codes. A qualified, licensed electrician should install your strips for safety and proper installation.
- 02. To meet UL requirements, only install with a Class 2 DC Constant Voltage LED driver.
- **03.** Do not install in an environment where excessive heat may exist.
- 04. LED strip lights must be handled with care. Excessive handling, bending, and pressure may damage the product, voiding the warranty.
- **05.** Do not secure this product with any kind of staples, nails, or materials that could potentially damage the product in any way. Keep these instructions for future reference.
- **06.** Do not cover this product with any kind of combustible material such as paper, fabrics, etc.
- **07.** Do not install with the majority of the product being unsupported. Allowing the product to be suspended or dangling while installing may cause damage to the PCB due to the weight of the strip.
- **08.** Do not install indoor LED tape light products in outdoor/wet location environments. Only use copper wiring. Use wires rated for at least 176°F (80°C) and certified for use with external connection of electrical equipment.
- 09. Each maximum run requires a dedicated power feed from the driver. Do not extend beyond the recommended maximum run length.
- 10. Make sure the appropriate gauge wire is installed between the driver, LEDs, and any dimmers. When choosing wire, calculate voltage drop, maximum amperage rating, and the location ratings on the wire. Improper wire selection and installation could overheat the wires and cause a fire.
- 11. Do not modify the product beyond the instructions, or the warranty will be void.
- 12. We reserve the right to modify and improve the design of our fixtures without prior notice. Although we try our best to order the same colors every time, we cannot guarantee that existing installed fixtures will match subsequent orders or replacements regarding product appearance, CCT, or lumen output due to changes in technology and phosphors over time

Warranty Information

Limited Warranty

This product has a 7-year limited warranty from the date of shipment. This warranty only includes the main product outlined in this specification sheet and does not include the additional accessories that are used as a reference. Complete warranty details for fixtures and additional accessories are available at https://www.flexfireleds.com/warranties/ within the Policies section. For warranty related questions, please, contact the product support team at support@flexfireleds.com.

Consumer's Acknowledgment

Flexfire LEDs, Inc. stands behind its products when they are used properly and according to our specifications. When you purchase our products, you are agreeing to the terms and conditions outlined in our warranty section. We try our best to make recommendations, but the burden of proper installation, design, and maintenance relies on the purchaser. This limited warranty does not include product failures that are the result of: Connecting LED products to the wrong output voltage; Improper connection of power, LED products, or controls; Connecting LED products or controls directly to any AC power source if they are stated for DC only input; Connecting power backwards to an AC power source; Products used in an inappropriate location or in environmental conditions (temperature, humidity, moisture, etc.) outside the normal specified range; Water damage to products not specifically sold as waterproof products; Electrical power surges and spikes; Damage from hail, flooding, tornado, fire, wind, earthquake, lightning, electrical storm, or any other natural disasters or "force majeure" incidences; Damage caused by a vehicle or other accident; Damage caused when transporting the item; Damage to any products that were modified by the user, used for purposes other than as intended or directed, or connected to LED systems or components not purchased from Flexfire LEDs; Products that have been subjected to misuse, mishandling, misapplication or accident. Products used in connection with any components, devices or systems other than those explicitly approved as compatible with Company's products and listed on Company's website. Excessive wear and tear and/or physical or accidental abuse, loss, or theft. Improper repairs or warranty services performed by someone other than Flexfire LEDs will void this warranty.



www.flexfireleds.com

Toll Free Number: 1-844-353-9347

📞 Local Number: (925) 273-9080

info@flexfireleds.com