



Receiver

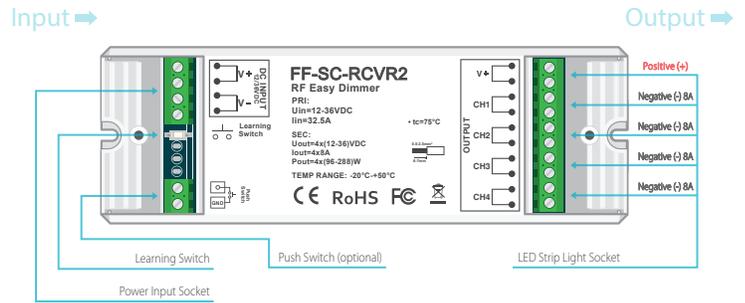

DIMENSIONS (inch/mm)

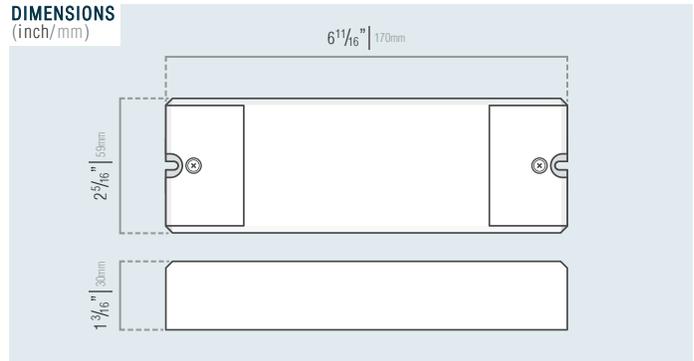

DETAILS

PRODUCT NAME	In-Line Receiver for Single Color Series
SKU	FF - SC - RCVR2
DESCRIPTION	<p>The Flexfire LEDs wireless receivers allow you to control different lighting areas with a push of a button.</p> <p>Simply pair a desktop or wireless wall dimmer to this receiver and enjoy flawless on/off control and dimming.</p> <p>You can pair up to 8 desktop or wireless wall dimmers to each receiver, but an infinite amount of receivers to a single desktop or wireless wall dimmer.</p>
WIRELESS RANGE	98 ft (30 m)
OUTPUT CURRENT	4x8A
INPUT VOLTAGE	5-24V DC
MAXIMUM LOAD	12V DC: 384w 24V DC: 768w

SYNC INSTRUCTIONS

1. Remove the cover on the right side of the receiver.
2. Insert positive and negative wires from the power source (5-24V DC) into the input of the receiver.
3. Tap the learning key button one time.
4. Tap the rotary knob on the wall or desktop wireless dimmer one time.

COMPATIBLE WITH:

- FF - SC - WALL - W (B)
- FF - SC - DSK - B