




Leona[®] Smart Home Plug

Product Data Sheet



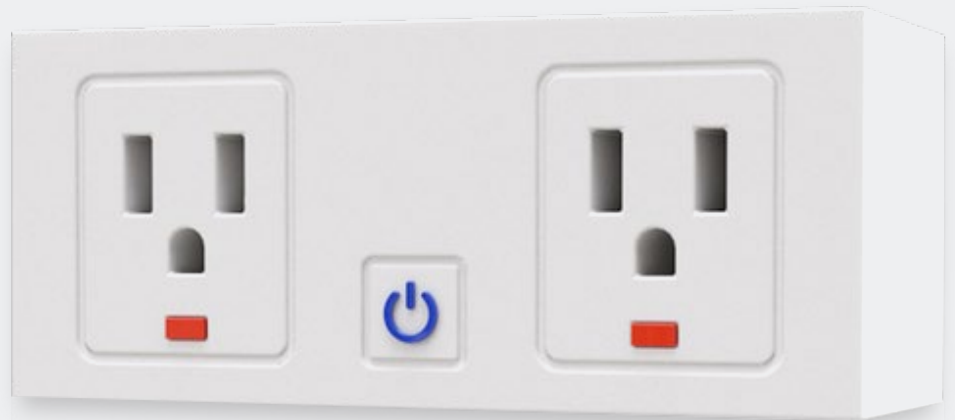

Leona® Smart Home Plug



Product Data Sheet



Features

- Control your home devices with the Leona® Smart Home Plug via the Leona® Smart app.
- Voice control capable when used with Amazon Alexa or Google Home. No hub required.
- Simple installation: Just plug this into the wall outlet and connect it to your Wi-Fi network by following the steps below.
- Devices can be controlled individually or in groups.
- Schedule your Leona® Smart Home Plug to automatically power electronics on and off as needed.

Mechanical Drawing

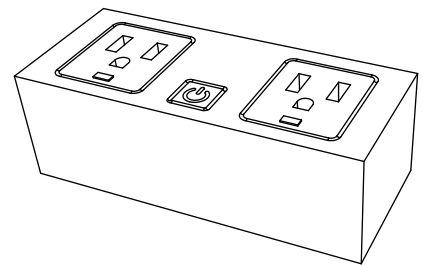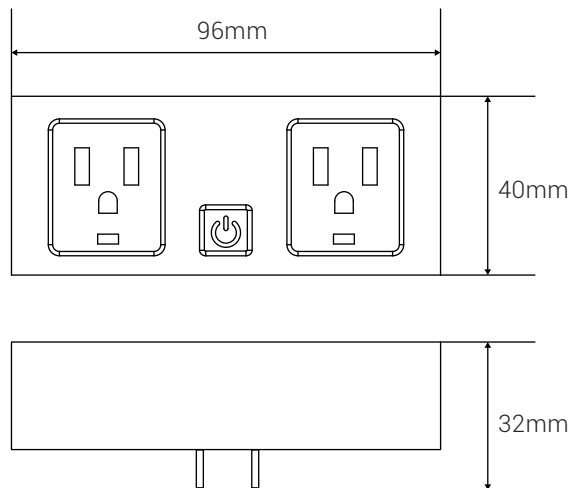

Specifications

SKU	Voltage Input	Max Load	Signal Type	Signal Range	Operating Frequency
LEO-PLUG-120V	120V AC	10A, 1200W	Wi-Fi	30 meters	2.4 GHz

Download and Connect App

App and Device Set Up video:

[Here](#)



1. **Connect to Wi-Fi 2.4GHz and activate Bluetooth** to ensure quick pairing is enabled.

Please Note:

Leona® Smart products are not compatible with 5GHz Wi-Fi signal.



2. **Download Leona® Smart app** from the iOS App Store or Google Play Store. The app is compatible with Android 4.0 and iOS 8.1 or higher.



3. Open the Leona® Smart app on your smartphone and either **sign up** for a new account or log in with an existing account.
4. Plug the Leona® Smart Plug into an existing electrical outlet and **make sure the Leona® Smart Home Plug is on standby mode** (the blue indicator light will flash 2 times per second) after being plugged in the socket.



5. Open the app and **tap on "+"** to add the device.

6. Then tap on "Electrical" to select your device.

7. Select your Wi-Fi network, input your Wi-Fi password, and tap on "Next".

8. Confirm that the device indicator is rapidly blinking (or reset the device by holding down the power button for 5 seconds) and tap "Next" to complete the process.

9. Once pairing is complete, you are now able to pair your Leona® Smart Home Plug with third-party smart home apps such as Google Home and Amazon Alexa.

If you want to add a new device under AP (Access Point) Mode, please follow steps from 1 to 4 above and then:

1. Tap on "AP Mode" and confirm that the device indicator is rapidly blinking (or reset the device by holding down the power button for 5 seconds).

2. Select your Wi-Fi network, input your Wi-Fi password, and then tap on "now" to go to WLAN settings in your smartphone. Select the Leona® Smart network for your Wi-Fi. Input your password after you select it.

3. Go back to the app and the app will start connecting.



Connect to the Leona® Smart App

1. Open your "Alexa" app on your home and tap on Home, and then on Skills.
2. Search for "Leona® Smart" on the search bar.
3. Tap on "Leona® Smart".
4. Tap on "Enable".
5. Choose your country and log in with your Leona® Smart account information (keep in mind this is different from your Amazon Alexa account information).
6. Tap on "Link Now" and then tap on "Authorize". After this is finished you can close this tab.
7. Back on the main menu, tap on Home, and then on Smart Home.
8. Tap on "Add device".
9. Alexa will search for devices.
10. After your devices are found you can voice-control them and you can also create groups to control them together.

Connect to Google Home

1. Open your "Google Home" App on your home and tap on Home, and then on Home Control.
2. Tap on "+".
3. Search for "Leona® Smart" on the list.
4. Tap on "Leona® Smart".
5. Choose your country and log in with your Leona® Smart account information.
6. Tap on Link Now.
7. Assign rooms to your devices.
8. Your devices will show up listed on your Home Control Page.

Troubleshooting

- Please check if the device is getting power.
- Check the Wi-Fi connection and ensure a Wi-Fi 2.4GHz is being used.
- If the device does not enter standby mode after being installed and power is turned on, hold the power button on the outlet for 5 seconds to reset the device.

Warranty Information

Limited Warranty

This product has a 1-year limited warranty from the date of shipment. This warranty only includes the main product outlined in this specification sheet and does not include the additional accessories that are used as a reference. Complete warranty details for fixtures and additional accessories are available at <https://www.flexfireleds.com/warranties/> within the Policies section. For warranty related questions, please, contact the product support team at (support@flexfireleds.com).

Consumer's Acknowledgement

Flexfire LEDs, Inc. stands behind its products when they are used properly and according to our specifications. When you purchase our products, you are agreeing to the terms and conditions outlined in our warranty section. We try our best to make recommendations, but the burden of proper installation, design, and maintenance relies on the purchaser. This limited warranty does not include product failures that are the result of: Connecting LED products to the wrong output voltage; Improper connection of power, LED products, or controls; Connecting LED products or controls directly to any AC power source if they are stated for DC only input; Connecting power backwards to an AC power source; Products used in an inappropriate location or in environmental conditions (temperature, humidity, moisture, etc.) outside the normal specified range; Water damage to products not specifically sold as waterproof products; Electrical power surges and spikes; Damage from hail, flooding, tornado, fire, wind, earthquake, lightning, electrical storm, or any other natural disasters or "force majeure" incidences; Damage caused by a vehicle or other accident; Damage caused when transporting the item; Damage to any products that were modified by the user, used for purposes other than as intended or directed, or connected to LED systems or components not purchased from Flexfire LEDs, Inc.; Products that have been subjected to misuse, mishandling, misapplication or accident. Products used in connection with any components, devices or systems other than those explicitly approved as compatible with Company's products and listed on Company's website. Excessive wear and tear and/or physical or accidental abuse, loss, or theft. Improper repairs or warranty services performed by someone other than Flexfire LEDs, Inc. will void this warranty.