




## Parameters

CIE_x	0.1667
CIE_y	0.7000
CIE_u'	0.0603
CIE_v'	0.5693
CCT	N/A
Duv	N/A
CRI (Ra)(R1~R8)	N/A
CRI (Re) (R1-R15)	N/A
CQS	N/A
TLCI(Qa)	N/A
GAI	N/A
TM-30-20 Rf	N/A
TM-30-20 Rg	N/A
Illuminance	213 lux
Foot Candle	19.8 fc
PPFD (400-700nm)	2.03 $\mu\text{mol}/\text{m}^2\text{s}$
$\lambda p$	517 nm
$\lambda D$	524 nm
Purity (Pe)	70 %
SP Ratio	3.0
Circadian Stimulus	0.40
Circadian Light	407

## Product information and test conditions



Name	ColorBright™ RGB 150 Color Changing LED Strip Light (Green)
Time	2022-02-24 19:34:23(Time-zone GMT+8)
Manufacturer	Flexfire LEDs, Inc.
User	FlexfireLEDs (warehouse@flexfireleds.com)

Temperature(°C)	Humidity(%)	Distance(m)
Spectrum		

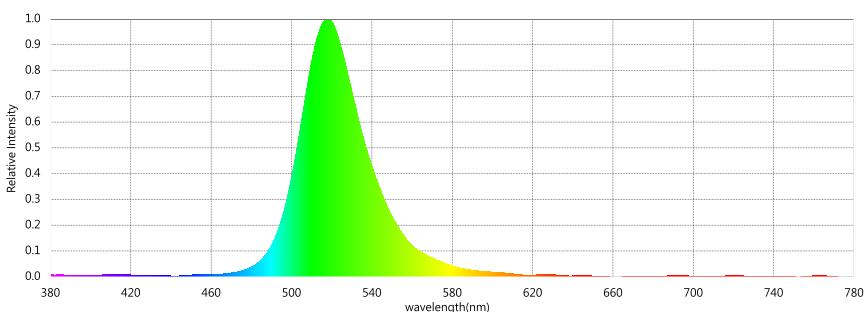


## CRI (Re) (R1-R15)

Ra = N/A Re = N/A

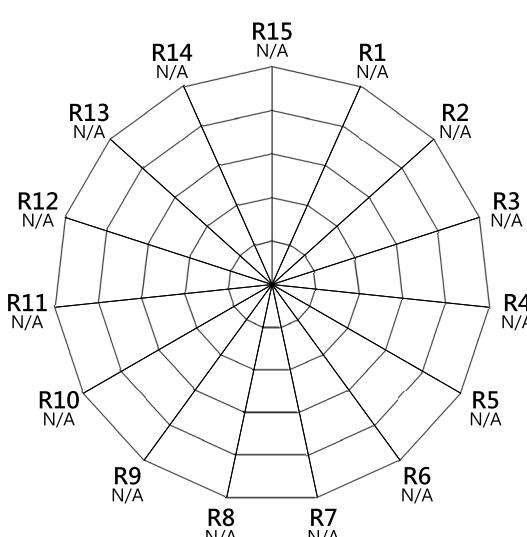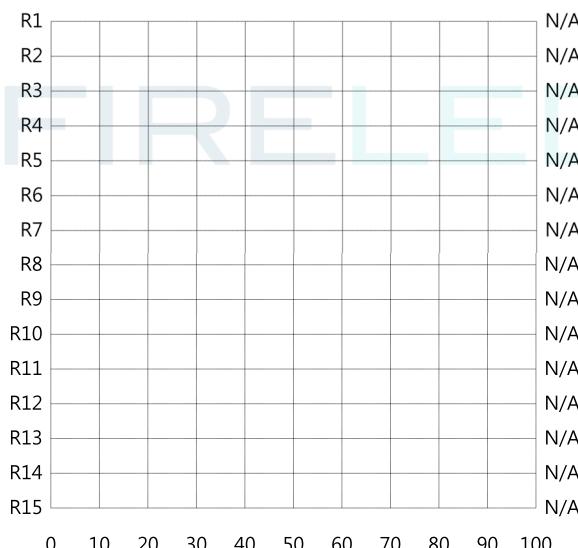


## CIE 1931

$x = 0.1667$ ,  $y = 0.7000$  CCT = N/A

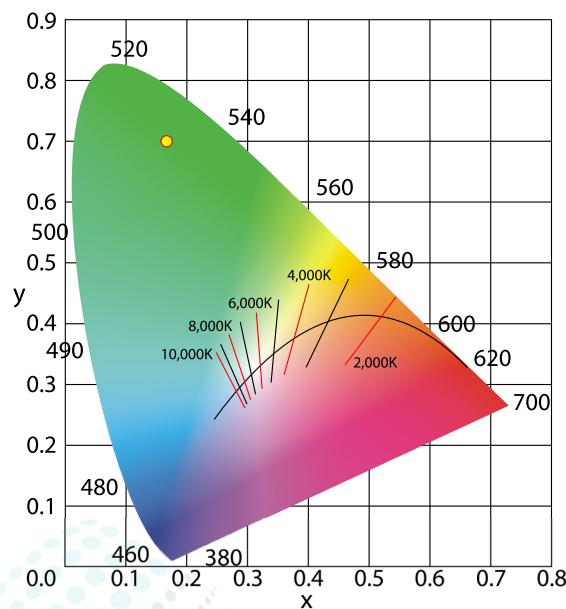


## CIE 1976


$x = 0.0602$ ,  $y = 0.5693$  CCT = N/A

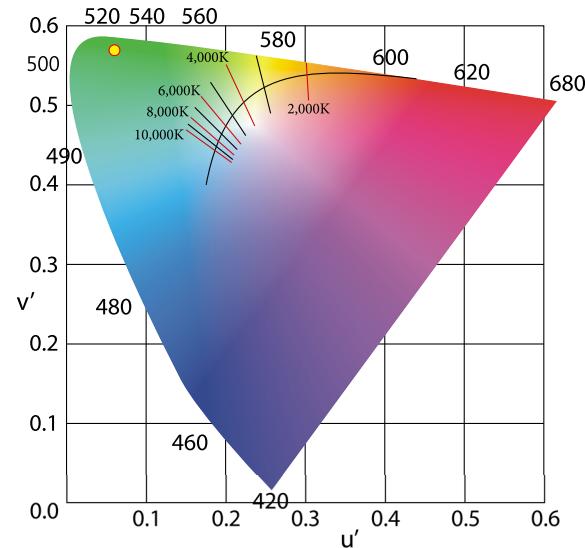

## C78.377 - 2017

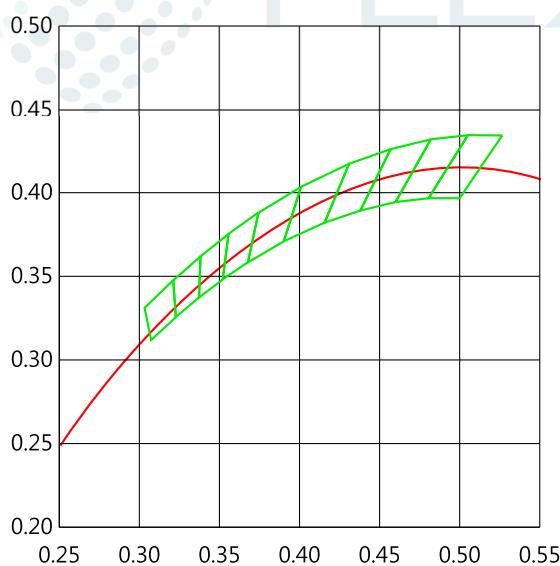

## IEC-SDCM

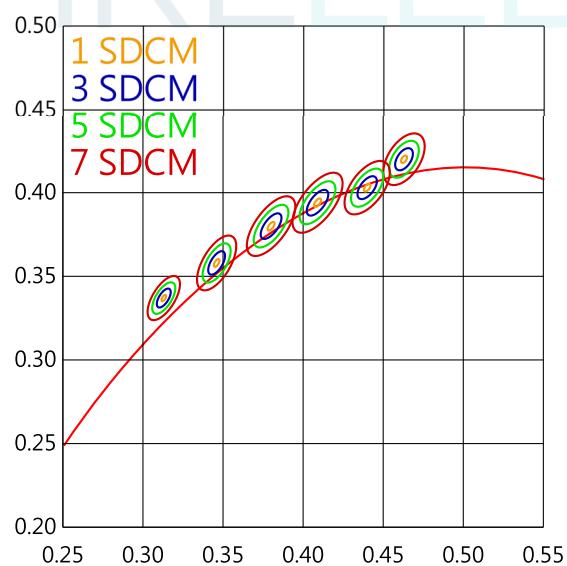

## TM-30-20

R<sub>f</sub> = N/A R<sub>g</sub> = N/A

