




Parameters

CIE_x	0.6823
CIE_y	0.3085
CIE_u'	0.5113
CIE_v'	0.5202
CCT	N/A
Duv	N/A
CRI (Ra)(R1~R8)	N/A
CRI (Re) (R1-R15)	N/A
CQS	N/A
TLCI(Qa)	N/A
GAI	N/A
TM-30-20 Rf	N/A
TM-30-20 Rg	N/A
Illuminance	109 lux
Foot Candle	10.2 fc
PPFD (400-700nm)	2.80 $\mu\text{mol}/\text{m}^2\text{s}$
λp	629 nm
λD	620 nm
Purity (Pe)	100 %
SP Ratio	0.1
Circadian Stimulus	0.00
Circadian Light	7

Product information and test conditions

Name	ColorBright™ RGB 150 Color Changing LED Strip Light (Red)
Time	2022-02-24 19:33:39(Time-zone GMT+8)
Manufacturer	Flexfire LEDs, Inc.
User	FlexfireLEDs (warehouse@flexfireleds.com)

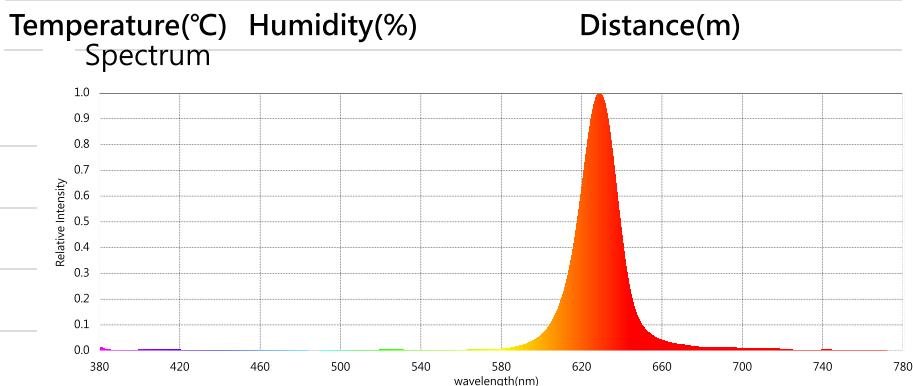


CRI (Re) (R1-R15)

Ra = N/A Re = N/A


R1	N/A
R2	N/A
R3	N/A
R4	N/A
R5	N/A
R6	N/A
R7	N/A
R8	N/A
R9	N/A
R10	N/A
R11	N/A
R12	N/A
R13	N/A
R14	N/A
R15	N/A

0 10 20 30 40 50 60 70 80 90 100

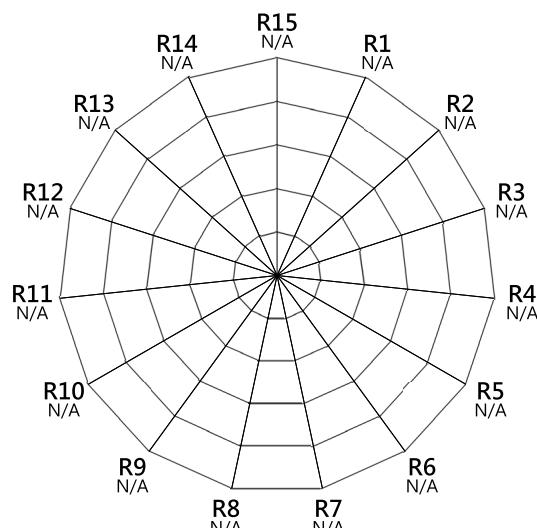


CIE 1931

$x = 0.6823$, $y = 0.3085$ CCT = N/A

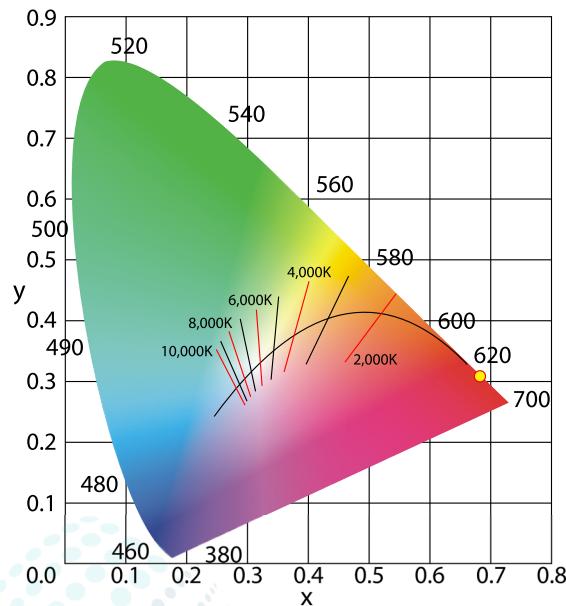


CIE 1976


$x = 0.5113$, $y = 0.5202$ CCT = N/A

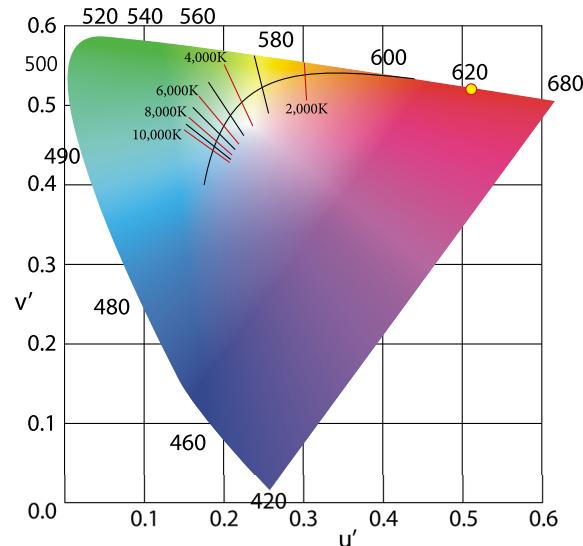

C78.377 - 2017

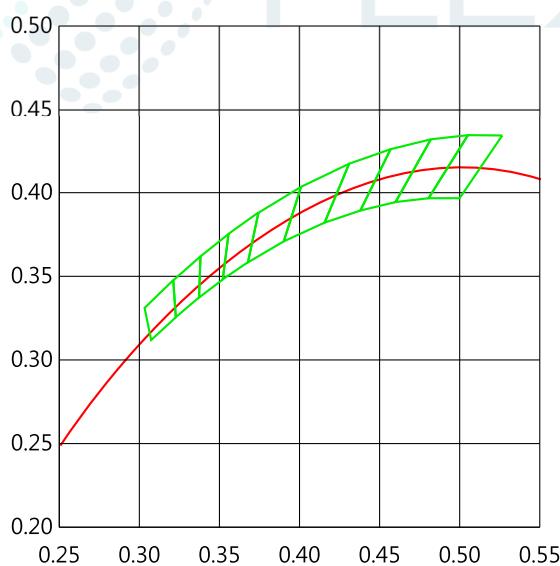

IEC-SDCM

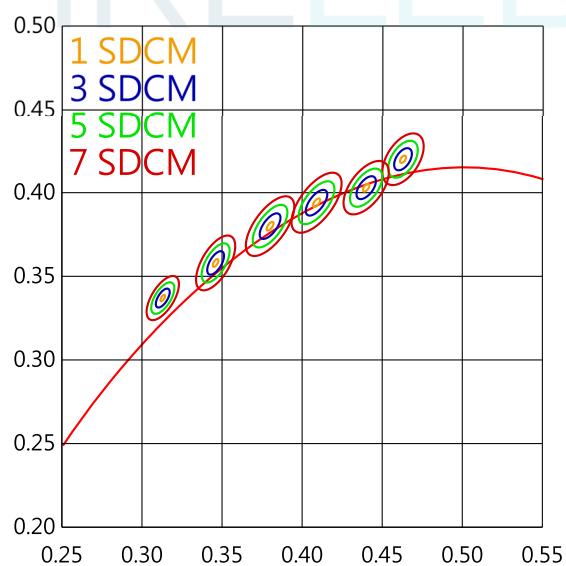

TM-30-20

Rf = N/A Rg = N/A

