

LED Avg.L Report

Test:U:24.00V I:0.1455A P:3.492W PF:1.000 Lamp Flux:47.2496x1 lm		
NAME: RM55-RGB2465	TYPE:LED Strip	WEIGHT:
SPEC.: 18W	DIM.: 1000*10*2(MM)	SERIAL No.: 001
MFR.: Évoralignt, Inc.	SUR.:0.002*1*0.01	Shielding Angle:120


AvgL	cd/m2
L_0~180 (65) av	752881
L_0~180 (75) av	707456
L_0~180 (85) av	629205
L_90~270 (65) av	762710
L_90~270 (75) av	710223
L_90~270 (85) av	654591
L_45 (65) av	779907
L_45 (75) av	723551
L_45 (85) av	693813

Standard: GB/T 29293-2012

γ
ρ
ρ ρ

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:9.660m [K=1.0000]

Planar Illuminance Curve

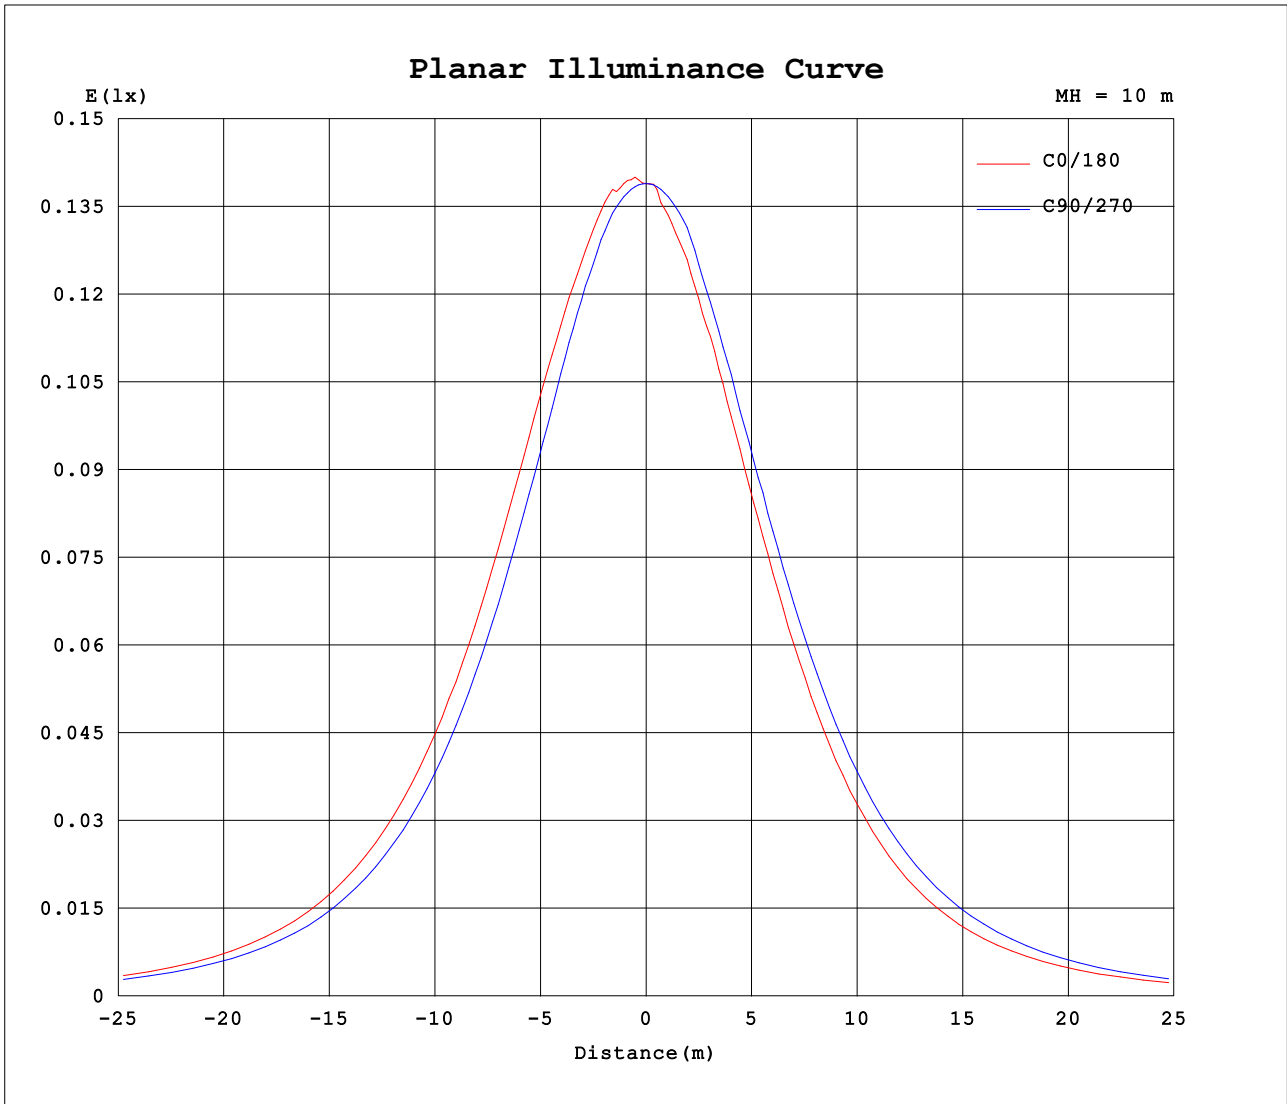

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Test Date: 2021-02-03

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.351
 Humidity: 65.0%
 Test Distance: 9.660m [K=1.0000]

