

9 J 9 F : = B 9 ' ; C B = C D < C H C A 9 H 9 F G ' G M G H 9 A ' H 9 G H ' F 9 D C F

@ 9 8 ' 5 j [" @ ' F Y d c f h

HYgh. I. & (" S S J ' = . S " % (') 5 ' D . ' " (((K ' D : . % " S S S ' ' @ U a d ' : ` i l . % % (" & ' * l % ' a		
B 5 A 9 . ' F A) ! F ; 6 & (*) ?	HMD9. @98' Ghf] d	K 9 = ; < H.
GD97" . ' % , K	DIM.: 1000*10*2(MM)	SERIAL No.: 001
A: F" . ' v j c f U `] [\ h ž ' = b W" ' .	GI F" . S " S S & l % l S " S % Shielding Angle:120	


5 j [@	WX# a &
@S \$ r % , \$ fl *) L U j	%, + & % \$ -
@S \$ r % , \$ fl +) L U j	%* (* - * &
@S \$ r % , \$ fl ,) L U j	%) S ' ' S \$
@S - \$ r & + \$ fl *) L U j	%, ' ' \$ * '
@S - \$ r & + \$ fl +) L U j	%* , - - , \$
@S - \$ r & + \$ fl ,) L U j	%) ' ' +) *
@S () fl *) L U j	%- % % & - ,
@S () fl +) L U j	%+)) & ' (
@S () fl ,) L U j	%* \$ + - ' (

GhUbXUf X. ' ; 6 # H' &- &- ' ! &\$ % &

γ
ρ
ρ ρ

γ FUb[Y. . . \$! . . - \$ 8 9 ;
γ = bhYfj U` . . . % " \$ 8 9 ;
HYgh' Gmg h Ya. 9 J 9 F : = B 9 ' ; C ! & \$ \$ \$ 5 S J % ' G M G
< i a] X] h m . *) " \$ 1
HYgh' 8] ghUbWY. - " * * \$ a ' O ? 1 % " \$ \$ \$ \$ Q

Planar Illuminance Curve

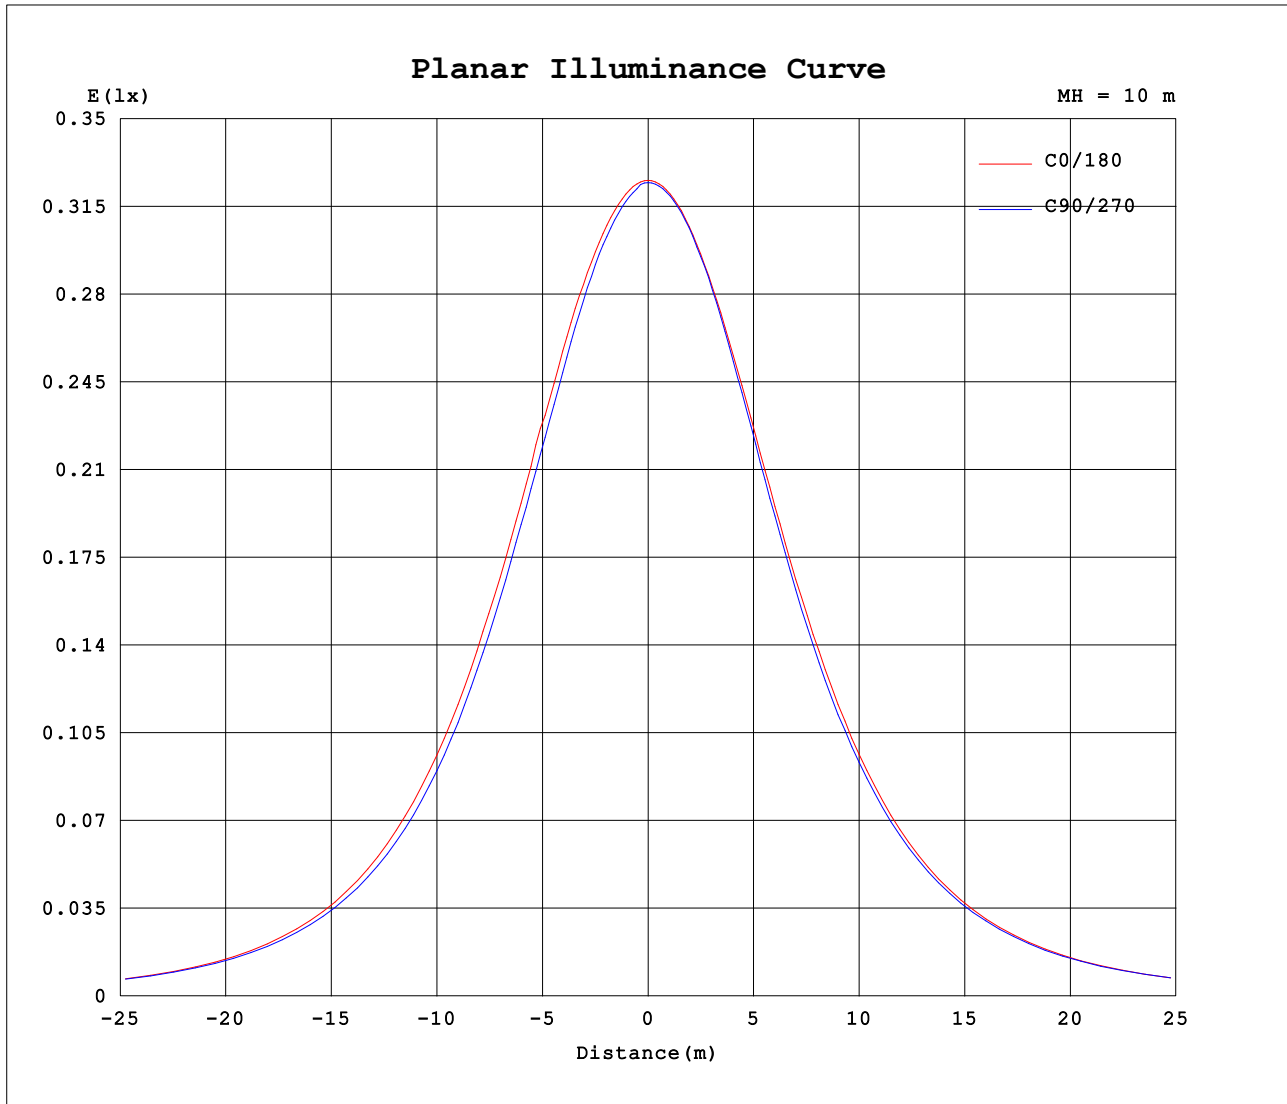

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Test Date: 2021-02-03

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.351
 Humidity: 65.0%
 Test Distance: 9.660m [K=1.0000]

