
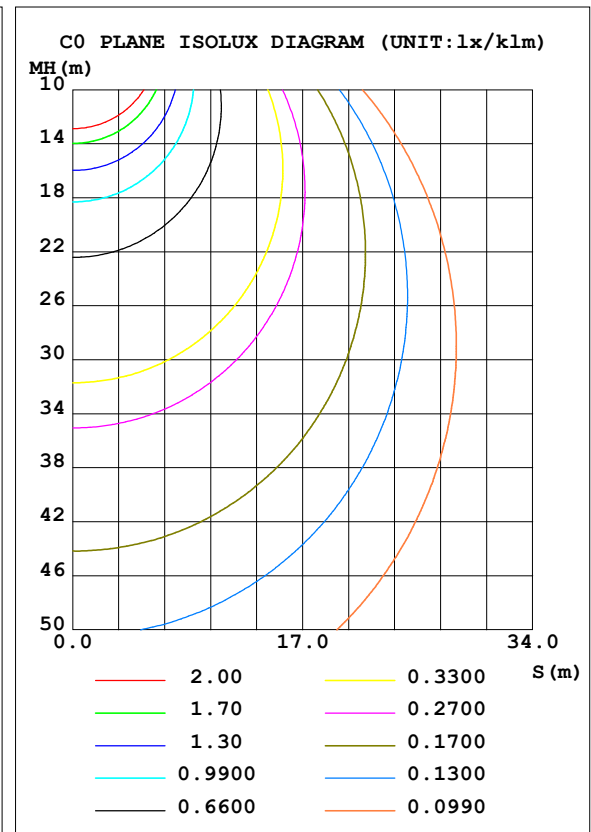


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:24.000V I:0.3847A P:9.2324W PF:1.0000 Freq:0Hz Lamp Flux:856.82x1 lm		
NAME: CLK-01-30K	TYPE: LED Strip	WEIGHT: Kg
SPEC.: 8.6W	DIM.: 500*10*10(MM)	SERIAL No.: 001
MFR.: Flexfire LEDs, Inc.	SUR.: 500*10(MM)	Shielding Angle: 120

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	SMD /LED	Imax(cd/klm)	332.8	S/MH(C0/180)	1.24
NOMINAL POWER(W)	9.2	LOR(%)	100.0	S/MH(C90/270)	1.24
RATED VOLTAGE(V)	24	TOTAL FLUX(lm/klm)	1000.0	η UP, DN(C0-180)	1.6, 48.4
NOMINAL FLUX(lm)	856.82	CIE CLASS	DIRECT	η UP, DN(C180-360)	1.7, 48.3
LAMPS INSIDE	1	η up(%)	3.3	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	24	η down(%)	96.7	CIBSE SHR MAX	1.35

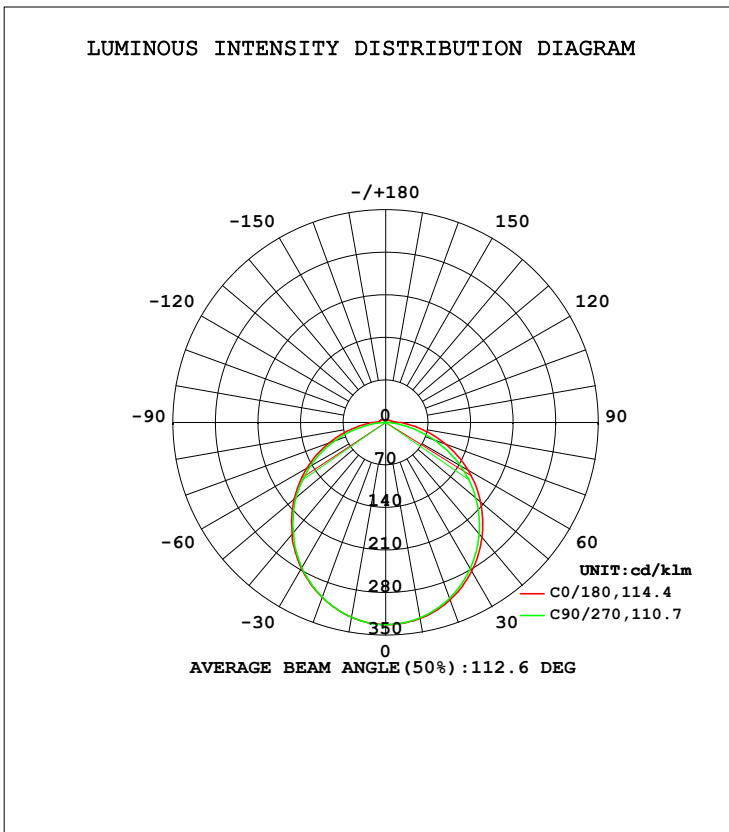

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.0DEG
 Test Date: 2020-8-13

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.429
 Humidity: 65.0%
 Test Distance: 7.000m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	327.5	327.3	326.5	325.8	325.4	325.2	325.4	326.8	0- 10	31.45	31.45	3.14,3.14
20	310.5	309.9	307.8	306.6	306.1	305.1	305.8	308.5	10- 20	89.81	121.3	12.1,12.1
30	283.0	281.7	278.2	277.0	277.4	275.6	276.0	280.1	20- 30	135.6	256.8	25.7,25.7
40	246.7	244.5	239.5	239.3	239.3	237.0	236.5	241.7	30- 40	163.1	419.9	42,42
50	203.9	200.4	193.6	194.9	196.5	193.6	192.6	199.0	40- 50	169.3	589.2	58.9,58.9
60	156.4	151.0	141.9	145.3	149.3	145.8	142.7	151.2	50- 60	154.6	743.8	74.4,74.4
70	105.6	97.57	85.75	92.26	99.41	94.71	89.75	99.93	60- 70	120.7	864.5	86.4,86.4
80	57.14	46.18	30.68	42.04	52.24	45.28	36.47	49.59	70- 80	73.66	938.1	93.8,93.8
90	22.94	13.23	0.4621	12.01	20.80	13.25	1.294	15.07	80- 90	28.50	966.6	96.7,96.7
100	11.49	6.812	0.7698	7.230	11.30	7.094	0.7380	6.994	90-100	9.319	976.0	97.6,97.6
110	9.037	5.651	1.153	6.753	9.849	6.585	1.125	5.570	100-110	6.508	982.5	98.2,98.2
120	7.526	4.692	1.528	6.358	8.899	6.209	1.525	4.487	110-120	5.354	987.8	98.8,98.8
130	6.220	3.231	1.923	5.760	7.924	5.625	1.936	3.184	120-130	4.263	992.1	99.2,99.2
140	4.446	2.503	2.314	4.612	6.782	4.518	2.332	2.806	130-140	3.135	995.2	99.5,99.5
150	3.251	2.690	2.681	3.764	5.026	3.729	2.706	2.766	140-150	2.190	997.4	99.7,99.7
160	2.939	2.956	2.934	2.973	2.886	2.976	2.938	2.900	150-160	1.436	998.8	99.9,99.9
170	3.107	3.139	3.121	3.128	3.107	3.168	3.126	3.104	160-170	0.8573	999.7	100,100
180	3.152	3.172	3.142	3.124	3.136	3.164	3.138	3.128	170-180	0.3006	1000	100,100
DEG	LUMINOUS INTENSITY:cd/klm									UNIT:lm/klm		

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.0DEG
 Test Date:2020-8-13

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.429
 Humidity:65.0%
 Test Distance:7.000m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:24.000V I:0.3847A P:9.2324W PF:1.0000 Freq:0Hz Lamp Flux:856.82x1 lm		
NAME: CLK-01-30K	TYPE: LED Strip	WEIGHT: Kg
SPEC.: 8.6W	DIM.: 500*10*10 (MM)	SERIAL No.: 001
MFR.: Flexfire LEDs, Inc.	SUR.: 500*10 (MM)	Shielding Angle: 120

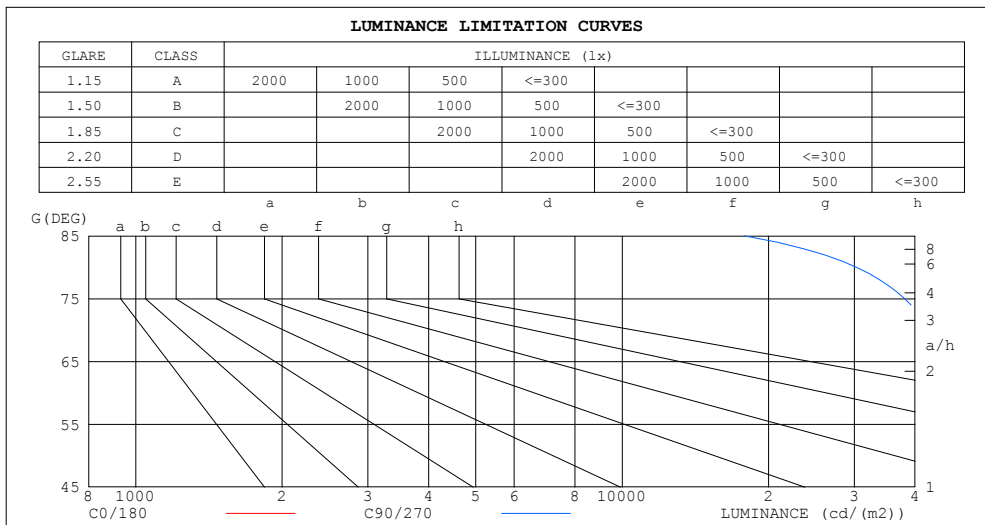

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	73212	17862
80	56194	30308
75	53131	38071
70	52704	43007
65	52988	46216
60	53425	48681
55	53755	50356
50	54168	51660
45	54577	52717


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.0DEG
 Test Date:2020-8-13

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.429
 Humidity:65.0%
 Test Distance:7.000m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:24.000V I:0.3847A P:9.2324W PF:1.0000 Freq:0Hz Lamp Flux:856.82x1 lm		
NAME: CLK-01-30K	TYPE: LED Strip	WEIGHT: Kg
SPEC.: 8.6W	DIM.: 500*10*10(MM)	SERIAL No.: 001
MFR.: Flexfire LEDs, Inc.	SUR.: 500*10(MM)	Shielding Angle: 120

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.18	1.18	1.18	1.15	1.15	1.15	1.09	1.09	1.09	1.04	1.04	1.04	.99	.99	.99	.97
1.0	1.02	.98	.94	.90	.96	.92	.95	.92	.89	.90	.88	.85	.86	.84	.82	.80
2.0	.89	.82	.76	.87	.80	.75	.83	.77	.73	.79	.74	.70	.75	.72	.68	.66
3.0	.78	.70	.63	.76	.68	.62	.73	.66	.61	.69	.64	.59	.66	.62	.58	.55
4.0	.69	.60	.53	.67	.59	.53	.64	.57	.52	.62	.55	.50	.59	.54	.49	.47
5.0	.62	.52	.46	.60	.52	.45	.58	.50	.44	.55	.49	.44	.53	.47	.43	.41
6.0	.55	.46	.40	.54	.46	.39	.52	.44	.39	.50	.43	.38	.48	.42	.38	.35
7.0	.50	.41	.35	.49	.41	.35	.47	.40	.34	.46	.39	.34	.44	.38	.33	.31
8.0	.46	.37	.31	.45	.37	.31	.43	.36	.31	.42	.35	.30	.40	.34	.30	.28
9.0	.42	.34	.28	.41	.33	.28	.40	.33	.28	.38	.32	.27	.37	.31	.27	.25
10.0	.39	.31	.25	.38	.30	.25	.37	.30	.25	.36	.29	.25	.35	.29	.24	.23

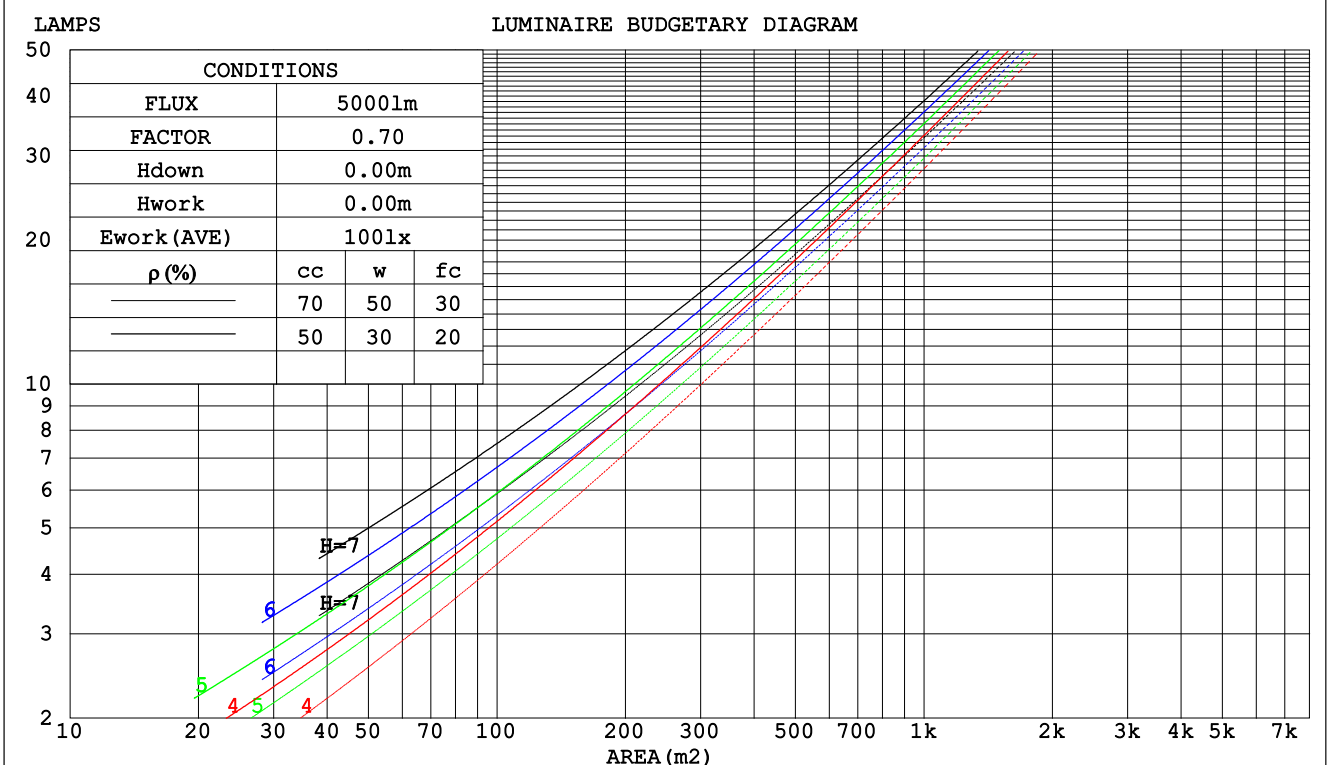

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.0DEG
 Test Date:2020-8-13

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.429
 Humidity:65.0%
 Test Distance:7.000m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:24.000V I:0.3847A P:9.2324W PF:1.0000 Freq:0Hz Lamp Flux:856.82x1 lm								
NAME: CLK-01-30K			TYPE: LED Strip			WEIGHT: Kg		
SPEC.: 8.6W			DIM.: 500*10*10(MM)			SERIAL No.: 001		
MFR.: Flexfire LEDs, Inc.			SUR.: 500*10(MM)			Shielding Angle: 120		

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.322	.183	.058	.314	.179	.057	.299	.171	.055	.285	.164	.053	.272	.158	.051	
2.0	.298	.163	.050	.291	.160	.049	.277	.154	.048	.265	.149	.047	.253	.143	.045	
3.0	.274	.146	.044	.267	.143	.043	.255	.138	.042	.244	.134	.041	.234	.130	.040	
4.0	.252	.131	.038	.246	.129	.038	.235	.125	.037	.225	.121	.036	.216	.117	.036	
5.0	.232	.118	.034	.227	.116	.034	.217	.113	.033	.208	.110	.033	.200	.107	.032	
6.0	.215	.108	.031	.210	.106	.031	.202	.103	.030	.193	.101	.030	.186	.098	.029	
7.0	.199	.099	.028	.195	.097	.028	.188	.095	.027	.180	.092	.027	.174	.090	.027	
8.0	.186	.091	.026	.182	.090	.025	.175	.088	.025	.169	.086	.025	.163	.084	.024	
9.0	.174	.084	.024	.171	.083	.023	.165	.081	.023	.159	.080	.023	.153	.078	.022	
10.0	.164	.078	.022	.161	.078	.022	.155	.076	.021	.149	.074	.021	.144	.073	.021	

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.216	.216	.216	.185	.185	.185	.126	.126	.126	.072	.072	.072	.023	.023	.023	
1.0	.207	.182	.159	.177	.156	.137	.121	.107	.095	.070	.062	.055	.022	.020	.018	
2.0	.199	.158	.123	.170	.136	.106	.117	.094	.074	.067	.055	.043	.022	.018	.014	
3.0	.191	.140	.100	.164	.121	.086	.113	.084	.061	.065	.049	.036	.021	.016	.012	
4.0	.184	.127	.084	.157	.110	.073	.108	.077	.051	.063	.045	.030	.020	.015	.010	
5.0	.176	.117	.073	.151	.101	.064	.104	.071	.045	.060	.041	.027	.019	.014	.009	
6.0	.169	.108	.065	.145	.094	.057	.100	.066	.040	.058	.039	.024	.019	.013	.008	
7.0	.162	.102	.059	.139	.088	.052	.096	.062	.037	.056	.036	.022	.018	.012	.007	
8.0	.155	.096	.055	.134	.083	.048	.093	.058	.034	.054	.034	.020	.017	.011	.007	
9.0	.149	.091	.052	.129	.079	.045	.089	.056	.032	.052	.033	.019	.017	.011	.006	
10.0	.144	.087	.049	.124	.075	.043	.086	.053	.030	.050	.031	.018	.016	.010	.006	

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.0DEG
 Test Date:2020-8-13

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.429
 Humidity:65.0%
 Test Distance:7.000m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:24.000V I:0.3847A P:9.2324W PF:1.0000 Freq:0Hz Lamp Flux:856.82x1 lm										
NAME: CLK-01-30K					TYPE: LED Strip			WEIGHT: Kg		
SPEC.: 8.6W					DIM.: 500*10*10(MM)			SERIAL No.: 001		
MFR.: Flexfire LEDs, Inc.					SUR.: 500*10(MM)			Shielding Angle: 120		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	26.4	28.0	26.9	28.4	28.8	25.9	27.5	26.3	27.9	28.3
3H	28.5	29.9	28.9	30.3	30.8	27.7	29.1	28.1	29.5	29.9
4H	29.3	30.7	29.8	31.1	31.6	28.3	29.6	28.7	30.0	30.5
6H	30.1	31.4	30.6	31.8	32.3	28.6	29.9	29.1	30.3	30.8
8H	30.4	31.6	30.9	32.1	32.6	28.7	29.9	29.2	30.4	30.9
12H	30.8	31.9	31.3	32.4	32.9	28.8	29.9	29.2	30.4	30.9
4H 2H	27.1	28.4	27.5	28.8	29.3	26.6	27.9	27.0	28.4	28.8
3H	29.3	30.5	29.8	30.9	31.4	28.6	29.7	29.0	30.2	30.6
4H	30.3	31.4	30.8	31.9	32.4	29.3	30.3	29.8	30.8	31.3
6H	31.3	32.2	31.8	32.7	33.2	29.8	30.7	30.3	31.2	31.7
8H	31.7	32.5	32.2	33.1	33.6	29.9	30.8	30.4	31.3	31.8
12H	32.1	32.9	32.7	33.4	34.0	30.0	30.7	30.5	31.3	31.8
8H 4H	30.7	31.5	31.2	32.0	32.6	29.7	30.5	30.2	31.0	31.6
6H	31.8	32.5	32.3	33.0	33.6	30.3	31.0	30.8	31.6	32.1
8H	32.3	32.9	32.9	33.5	34.1	30.5	31.1	31.0	31.7	32.2
12H	32.9	33.5	33.4	34.0	34.6	30.6	31.2	31.2	31.7	32.3
12H 4H	30.7	31.4	31.2	32.0	32.5	29.7	30.5	30.3	31.0	31.6
6H	31.8	32.5	32.4	33.0	33.6	30.4	31.1	31.0	31.6	32.2
8H	32.4	33.0	33.0	33.5	34.2	30.7	31.2	31.2	31.8	32.4
CIE190: 2010										

CIE190: 2010
Area: 0.005 m2

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.0DEG
Test Date:2020-8-13

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.429
Humidity:65.0%
Test Distance:7.000m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:24.000V I:0.3847A P:9.2324W PF:1.0000 Freq:0Hz Lamp Flux:856.82x1 lm		
NAME: CLK-01-30K	TYPE: LED Strip	WEIGHT: Kg
SPEC.: 8.6W	DIM.: 500*10*10(MM)	SERIAL No.: 001
MFR.: Flexfire LEDs, Inc.	SUR.: 500*10(MM)	Shielding Angle: 120


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	56	44	37	55	44	37	54	43	37	30
0.80	66	54	46	65	53	46	63	53	46	39
1.00	74	63	55	73	62	55	70	63	54	47
1.25	81	70	63	80	69	62	77	68	61	54
1.50	86	76	69	84	75	68	81	73	67	59
2.00	93	84	77	91	83	76	87	80	75	66
2.50	97	89	83	95	87	81	90	84	79	70
3.00	100	93	87	98	91	86	94	88	84	74
4.00	105	99	94	102	97	92	97	93	89	79
5.00	107	102	98	104	100	96	99	96	92	82
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.0DEG
 Test Date:2020-8-13

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.429
 Humidity:65.0%
 Test Distance:7.000m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:24.000V I:0.3847A P:9.2324W PF:1.0000 Freq:0Hz Lamp Flux:856.82x1 lm		
NAME: CLK-01-30K	TYPE: LED Strip	WEIGHT: Kg
SPEC.: 8.6W	DIM.: 500*10*10 (MM)	SERIAL No.: 001
MFR.: Flexfire LEDs, Inc.	SUR.: 500*10 (MM)	Shielding Angle: 120

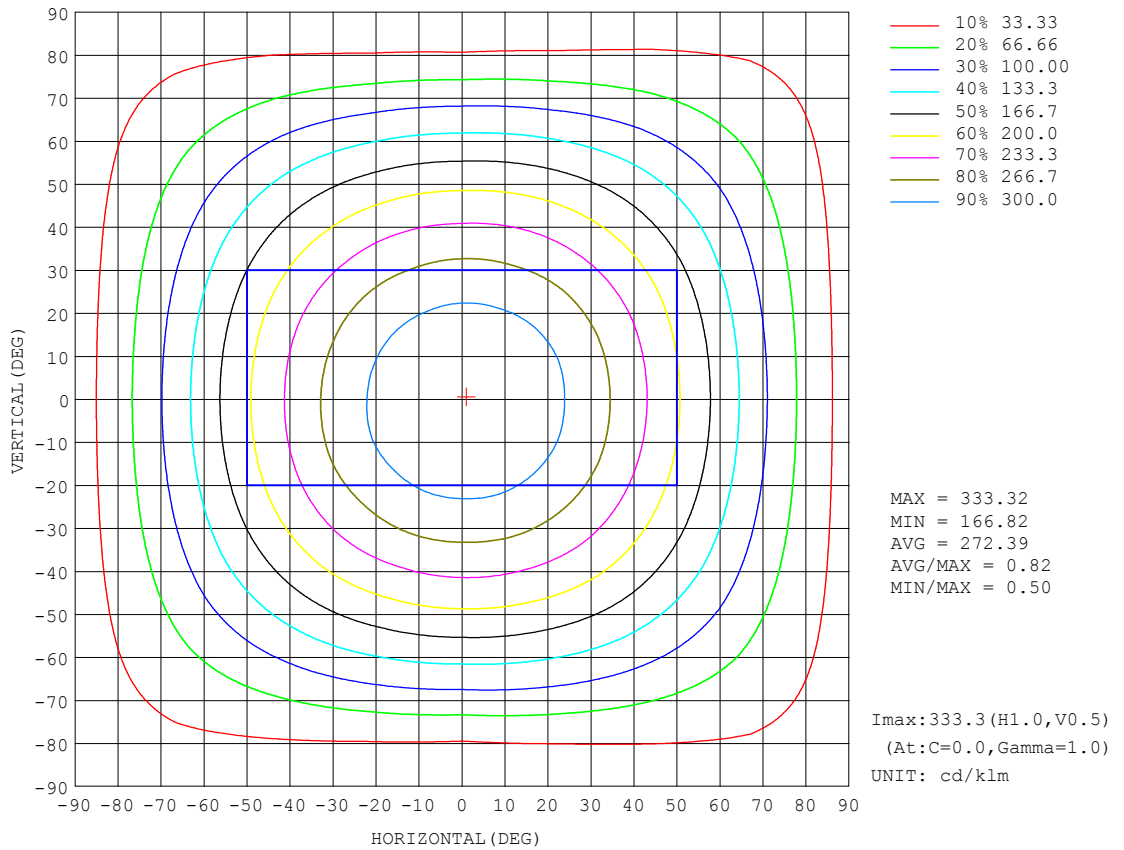


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.0DEG
 Test Date:2020-8-13

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.429
 Humidity:65.0%
 Test Distance:7.000m [K=1.0000]
 Remarks:

AAI Figure

Test:U:24.000V I:0.3847A P:9.2324W PF:1.0000 Freq:0Hz Lamp Flux:856.82x1 lm		
NAME: CLK-01-30K	TYPE: LED Strip	WEIGHT: Kg
SPEC.: 8.6W	DIM.: 500*10*10 (MM)	SERIAL No.: 001
MFR.: Flexfire LEDs, Inc.	SUR.: 500*10 (MM)	Shielding Angle: 120

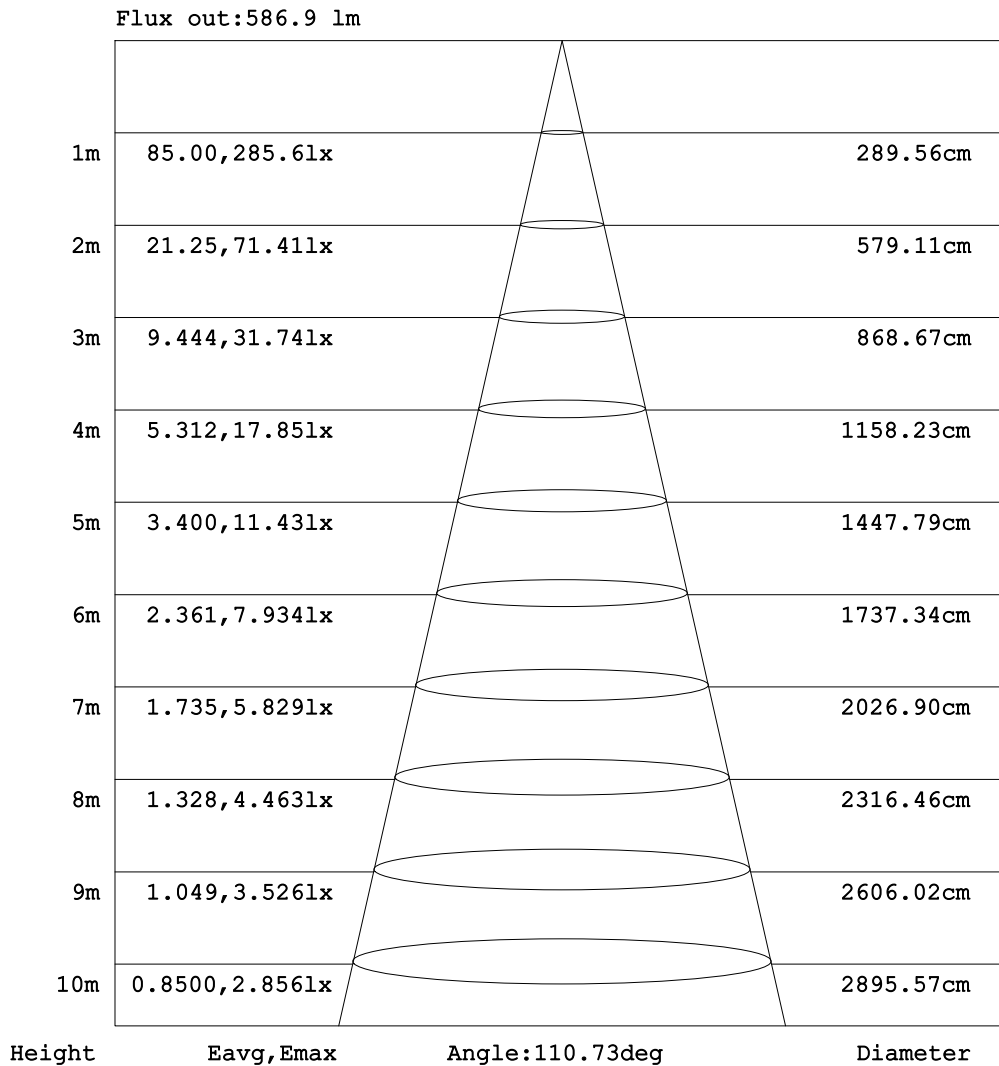


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.0DEG
 Test Date:2020-8-13

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.429
 Humidity:65.0%
 Test Distance:7.000m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:24.000V I:0.3847A P:9.2324W PF:1.0000 Freq:0Hz Lamp Flux:856.82x1 lm		
NAME: CLK-01-30K	TYPE: LED Strip	WEIGHT: Kg
SPEC.: 8.6W	DIM.: 500*10*10 (MM)	SERIAL No.: 001
MFR.: Flexfire LEDs, Inc.	SUR.: 500*10 (MM)	Shielding Angle: 120

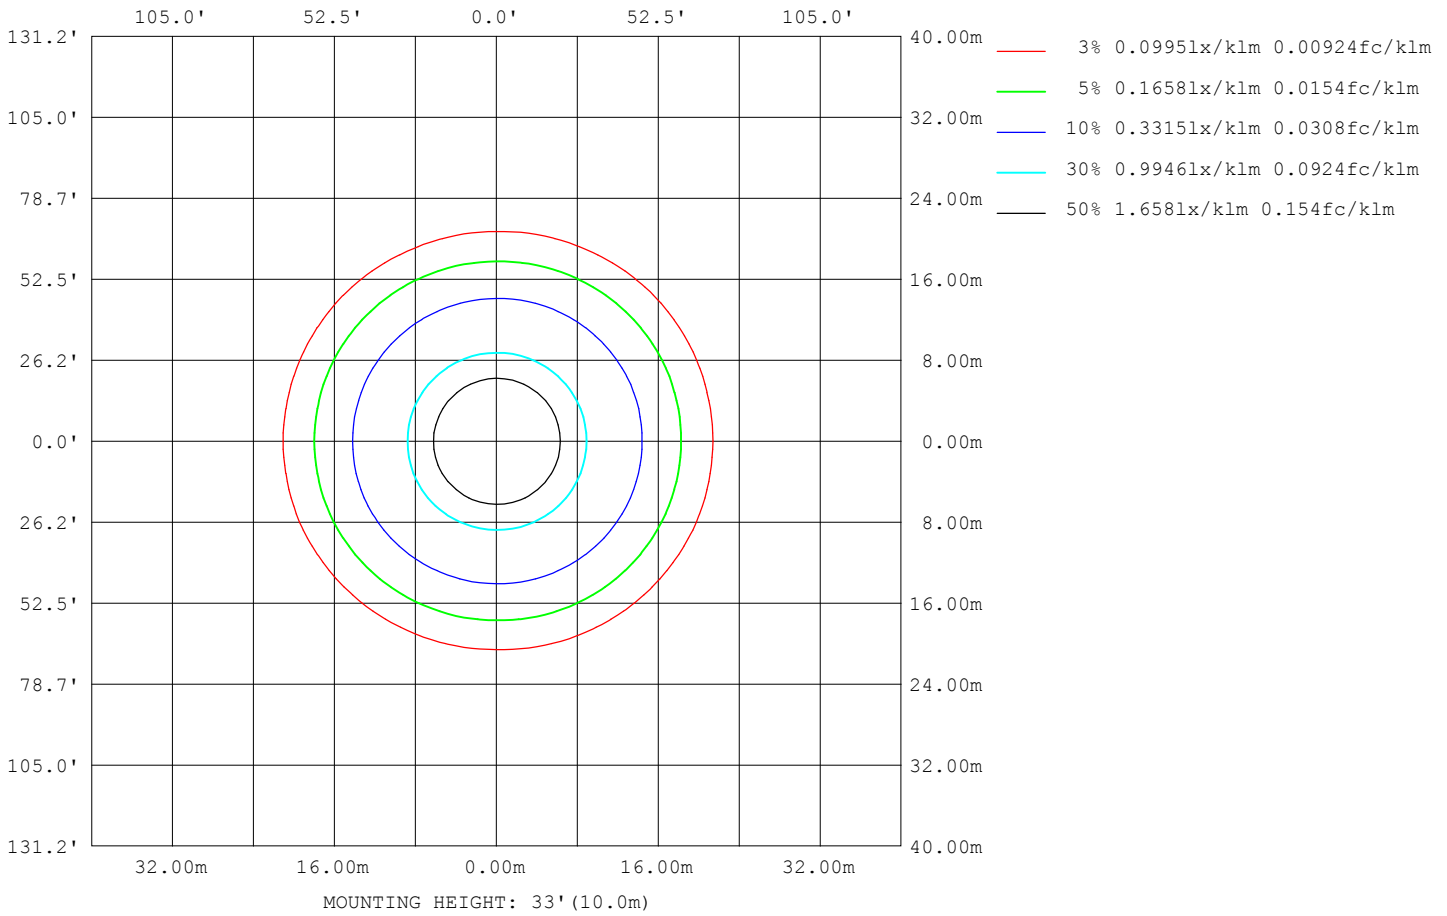

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.0DEG
 Test Date:2020-8-13

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.429
 Humidity:65.0%
 Test Distance:7.000m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:24.000V I:0.3847A P:9.2324W PF:1.0000 Freq:0Hz Lamp Flux:856.82x1 lm		
NAME: CLK-01-30K	TYPE: LED Strip	WEIGHT: Kg
SPEC.: 8.6W	DIM.: 500*10*10(MM)	SERIAL No.: 001
MFR.: Flexfire LEDs, Inc.	SUR.: 500*10(MM)	Shielding Angle: 120


AvgL	cd/m2
L_0~180 (65) av	51827
L_0~180 (75) av	51448
L_0~180 (85) av	69751
L_90~270 (65) av	46701
L_90~270 (75) av	39739
L_90~270 (85) av	22904
L_45 (65) av	49586
L_45 (75) av	46442
L_45 (85) av	50918

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.0DEG
 Test Date:2020-8-13

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.429
 Humidity:65.0%
 Test Distance:7.000m [K=1.0000]
 Remarks:

Planar Illuminance Curve

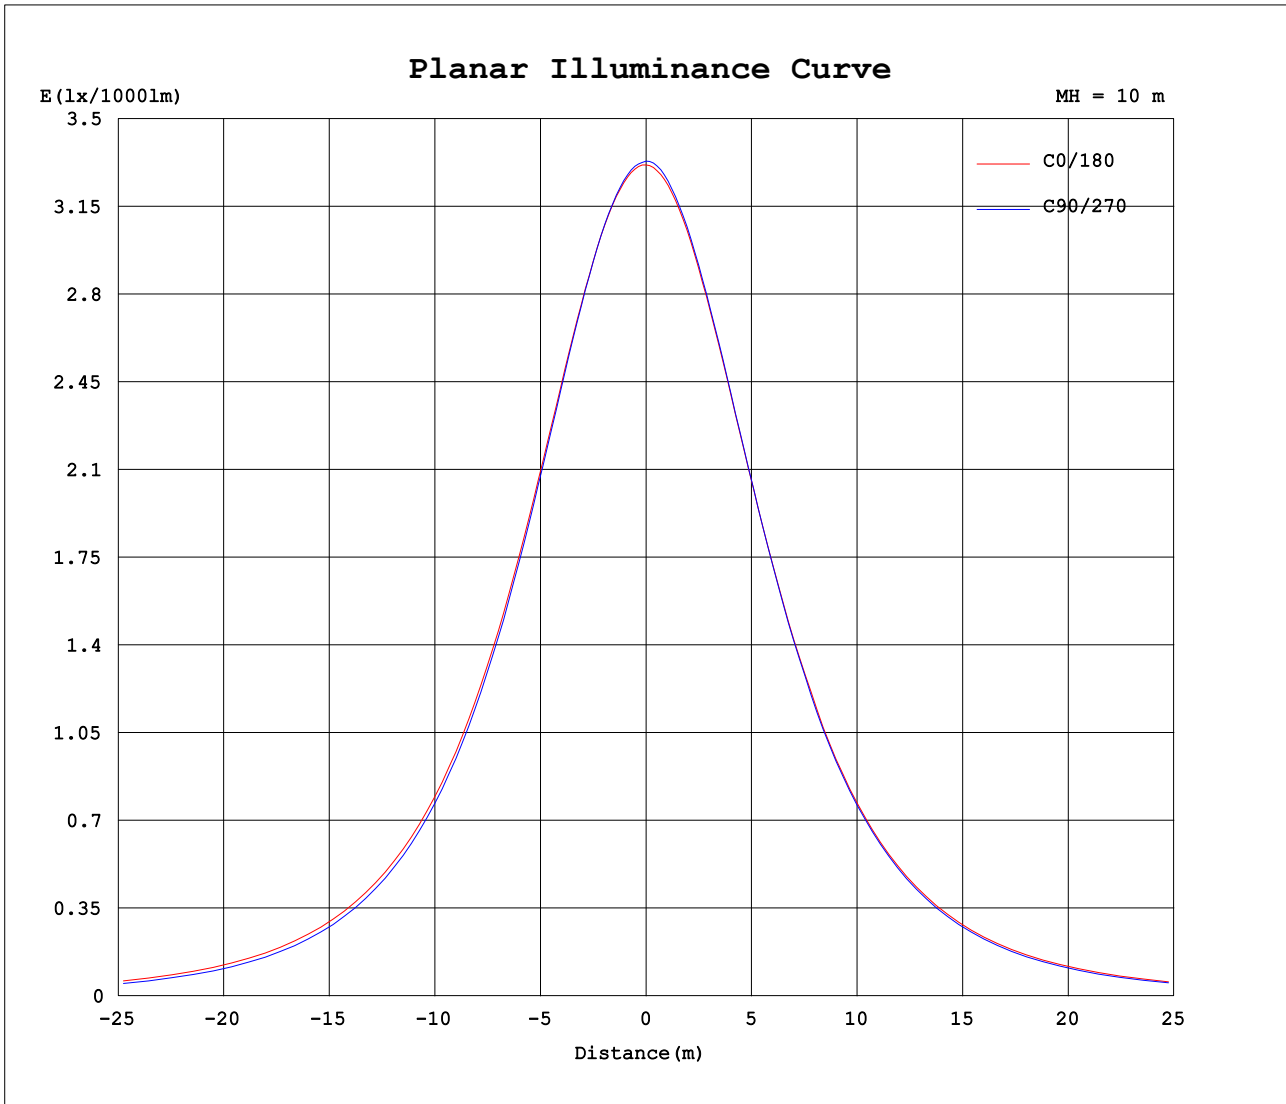

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.0DEG
 Test Date: 2020-8-13

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.429
 Humidity: 65.0%
 Test Distance: 7.000m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:24.000V I:0.3847A P:9.2324W PF:1.0000 Freq:0Hz Lamp Flux:856.82x1 lm		
NAME: CLK-01-30K	TYPE: LED Strip	WEIGHT: Kg
SPEC.: 8.6W	DIM.: 500*10*10(MM)	SERIAL No.: 001
MFR.: Flexfire LEDs, Inc.	SUR.: 500*10(MM)	Shielding Angle: 120

Table--1

UNIT: cd/klm

C (DEG) \ γ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	333	333	333	333	333	333	333	333	333	333	333	333	333	333	333	333			
5	332	332	331	331	331	331	331	331	331	331	331	331	331	331	332	332			
10	328	328	327	327	326	326	326	326	325	325	325	325	325	326	327	327			
15	320	321	320	320	319	318	318	317	317	317	316	316	317	317	319	320			
20	310	311	310	309	308	308	307	306	306	306	305	305	306	306	308	310			
25	298	298	297	296	294	294	293	293	293	292	291	291	292	293	295	297			
30	283	283	282	280	278	278	277	277	277	276	276	275	276	277	280	281			
35	266	266	264	262	260	260	259	260	260	258	258	256	258	259	262	264			
40	247	246	245	241	239	238	239	239	239	239	237	236	237	239	242	245			
45	226	225	223	220	217	216	218	218	219	218	216	215	215	218	221	224			
50	204	203	200	196	194	193	195	196	197	196	194	193	193	196	199	203			
55	181	179	176	172	168	168	171	173	173	173	170	168	168	172	176	179			
60	156	155	151	146	142	142	145	148	149	148	146	143	143	146	151	155			
65	131	130	124	119	114	115	119	123	124	123	120	117	116	120	126	130			
70	106	104	97.6	91.1	85.7	88.0	92.3	97.3	99.4	97.8	94.7	90.1	89.7	93.3	99.9	104			
75	80.5	78.3	71.0	63.4	57.4	60.5	66.1	72.2	74.9	73.1	69.3	63.8	62.6	66.8	74.1	79.0			
80	57.1	54.4	46.2	37.4	30.7	34.9	42.0	49.3	52.2	50.2	45.3	38.5	36.5	41.2	49.6	55.4			
85	37.4	34.4	26.0	16.1	9.08	14.7	23.0	30.5	33.6	31.3	25.6	17.6	14.2	19.5	28.9	35.3			
90	22.9	20.4	13.2	4.87	0.46	5.00	12.0	18.3	20.8	18.7	13.3	5.86	1.29	6.77	15.1	21.0			
95	15.0	13.1	8.25	3.06	0.59	3.57	8.07	12.3	14.0	12.4	8.28	3.63	0.57	3.73	8.89	13.3			
100	11.5	10.1	6.81	2.81	0.77	3.55	7.23	10.2	11.3	10.0	7.09	3.54	0.74	3.32	6.99	10.2			
105	9.97	8.90	6.15	2.81	0.96	3.61	6.96	9.53	10.4	9.38	6.80	3.54	0.93	3.13	6.20	8.89			
110	9.04	8.02	5.65	2.66	1.15	3.61	6.75	9.10	9.85	8.94	6.58	3.54	1.13	2.86	5.57	7.97			
115	8.18	7.34	5.13	2.09	1.34	3.58	6.56	8.70	9.34	8.54	6.40	3.48	1.33	2.28	4.89	6.88			
120	7.53	6.63	4.69	1.94	1.53	3.27	6.36	8.32	8.90	8.17	6.21	3.17	1.52	2.16	4.49	6.20			
125	6.85	6.09	4.07	1.86	1.73	3.07	6.09	7.92	8.43	7.77	5.94	2.94	1.74	2.06	3.77	5.81			
130	6.22	5.51	3.23	1.94	1.92	2.92	5.76	7.12	7.92	7.34	5.62	2.83	1.94	2.06	3.18	5.08			
135	5.40	4.42	2.82	2.11	2.10	2.56	5.09	6.78	7.38	6.85	5.02	2.33	2.13	2.16	3.01	4.28			
140	4.45	3.72	2.50	2.32	2.31	2.33	4.61	6.24	6.78	6.17	4.52	2.34	2.33	2.28	2.81	3.65			
145	3.87	3.02	2.56	2.53	2.54	2.55	4.21	5.33	5.84	5.36	4.12	2.56	2.55	2.49	2.75	3.25			
150	3.25	2.76	2.69	2.70	2.68	2.71	3.76	4.75	5.03	4.68	3.73	2.71	2.71	2.66	2.77	2.99			
155	3.05	2.83	2.84	2.84	2.82	2.84	2.86	4.14	4.32	4.03	2.85	2.83	2.82	2.79	2.78	2.92			
160	2.94	2.94	2.96	2.96	2.93	2.96	2.97	2.96	2.89	2.87	2.98	2.94	2.94	2.89	2.90	2.91			
165	3.03	3.04	3.07	3.06	3.04	3.05	3.07	3.09	3.00	2.99	3.08	3.06	3.04	3.01	3.01	3.00			
170	3.11	3.11	3.14	3.13	3.12	3.12	3.13	3.15	3.11	3.08	3.17	3.13	3.13	3.09	3.10	3.10			
175	3.16	3.15	3.20	3.18	3.18	3.15	3.18	3.17	3.16	3.15	3.20	3.18	3.17	3.15	3.14	3.15			
180	3.15	3.12	3.17	3.14	3.14	3.12	3.12	3.13	3.14	3.13	3.16	3.15	3.14	3.13	3.13	3.12			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.0DEG
 Test Date:2020-8-13

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.429
 Humidity:65.0%
 Test Distance:7.000m [K=1.0000]
 Remarks: