
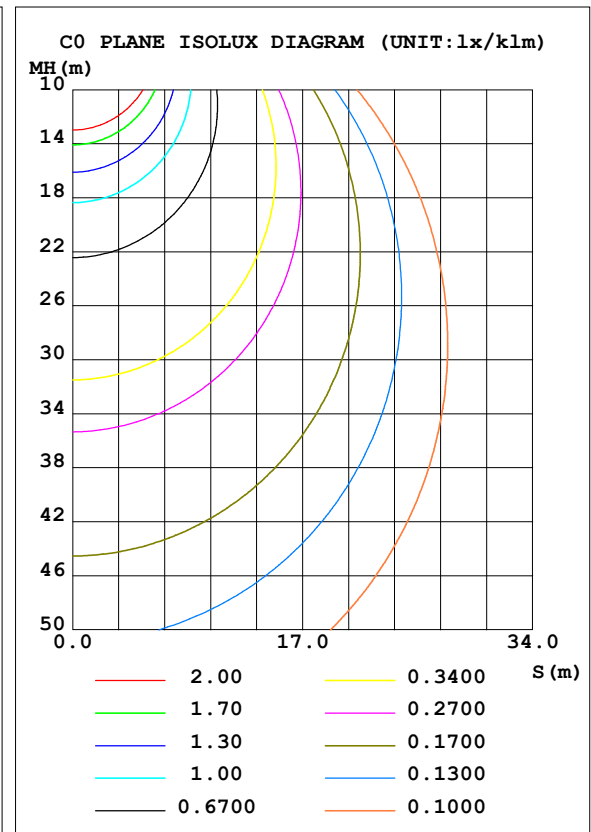


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:23.998V I:0.1870A P:4.4876W PF:1.0000 Freq:0Hz Lamp Flux:404.065x1 lm		
NAME: CLK-01-30K	TYPE: LED Strip	WEIGHT: Kg
SPEC.: 4.3W	DIM.: 350*10*10(MM)	SERIAL No.: 001
MFR.: Flexfire LEDs, Inc.	SUR.: 340*10(MM)	Shielding Angle: 120

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	SMD /LED	Imax(cd/klm)	338.2	S/MH(C0/180)	1.24
NOMINAL POWER(W)	4.48	LOR(%)	100.0	S/MH(C90/270)	1.22
RATED VOLTAGE(V)	24	TOTAL FLUX(lm/klm)	1000.0	η UP, DN(C0-180)	2.1,47.7
NOMINAL FLUX(lm)	404.065	CIE CLASS	DIRECT	η UP, DN(C180-360)	2.1,48.2
LAMPS INSIDE	1	η up(%)	4.2	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	24	η down(%)	95.8	CIBSE SHR MAX	1.35

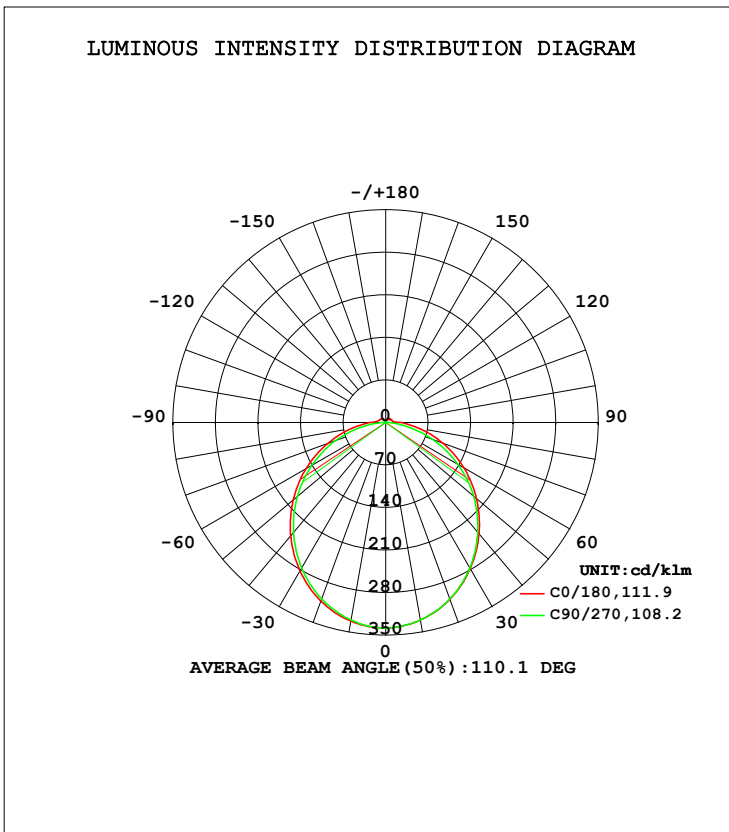

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.0DEG
 Test Date: 2020-8-13

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.429
 Humidity: 65.0%
 Test Distance: 7.000m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	330.0	329.5	330.1	330.5	331.8	331.1	329.9	329.9	0- 10	31.90	31.90	3.19,3.19
20	309.5	308.6	309.1	310.3	312.6	310.0	309.0	308.6	10- 20	90.68	122.6	12.3,12.3
30	278.3	276.9	276.9	278.9	282.1	278.8	276.6	277.1	20- 30	135.9	258.5	25.9,25.9
40	239.2	237.0	235.8	239.1	243.3	239.3	236.2	237.5	30- 40	162.0	420.5	42.1,42.1
50	195.0	191.7	189.3	193.4	198.7	194.4	190.0	193.0	40- 50	166.8	587.4	58.7,58.7
60	148.2	142.8	136.9	144.0	151.0	145.9	139.8	145.0	50- 60	151.2	738.5	73.9,73.9
70	100.4	92.19	82.68	92.75	101.8	95.59	88.41	95.41	60- 70	117.7	856.3	85.6,85.6
80	55.44	44.29	29.93	44.47	56.46	47.50	35.53	47.77	70- 80	72.61	928.9	92.9,92.9
90	23.95	11.69	0.5002	14.31	24.56	15.66	1.620	15.67	80- 90	29.54	958.4	95.8,95.8
100	12.28	7.883	0.7689	8.625	13.75	8.590	0.7266	8.273	90-100	10.45	968.9	96.9,96.9
110	11.10	7.111	1.124	8.001	11.65	8.003	1.099	7.681	100-110	7.819	976.7	97.7,97.7
120	9.784	7.458	1.530	7.725	10.67	7.587	1.496	7.439	110-120	6.959	983.7	98.4,98.4
130	9.719	7.139	1.928	7.285	9.744	7.129	1.903	6.574	120-130	5.916	989.6	99,99
140	8.646	5.297	2.334	5.600	8.599	5.207	2.309	4.639	130-140	4.577	994.2	99.4,99.4
150	6.478	4.777	2.749	4.452	5.946	4.208	2.698	4.035	140-150	2.962	997.1	99.7,99.7
160	3.925	2.976	2.966	2.955	3.624	2.908	2.949	2.930	150-160	1.706	998.8	99.9,99.9
170	3.112	3.184	3.165	3.128	3.087	3.115	3.139	3.154	160-170	0.8709	999.7	100,100
180	3.182	3.175	3.182	3.162	3.165	3.184	3.174	3.188	170-180	0.3016	1000	100,100
DEG	LUMINOUS INTENSITY:cd/klm									UNIT:lm/klm		

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.0DEG
 Test Date:2020-8-13

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.429
 Humidity:65.0%
 Test Distance:7.000m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:23.998V I:0.1870A P:4.4876W PF:1.0000 Freq:0Hz Lamp Flux:404.065x1 lm		
NAME: CLK-01-30K	TYPE: LED Strip	WEIGHT: Kg
SPEC.: 4.3W	DIM.: 350*10*10 (MM)	SERIAL No.: 001
MFR.: Flexfire LEDs, Inc.	SUR.: 340*10 (MM)	Shielding Angle: 120

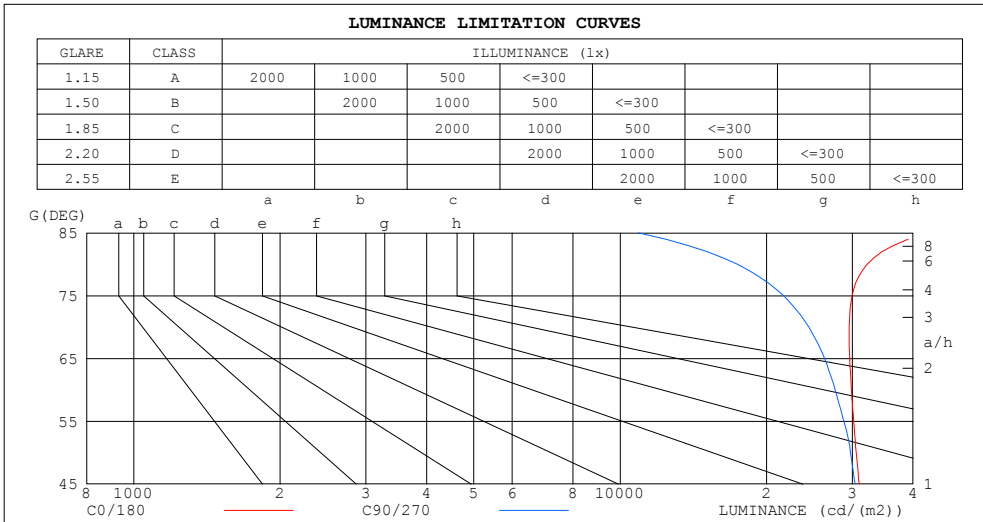

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	43049	10917
80	32181	17416
75	29982	21673
70	29580	24429
65	29637	26307
60	29867	27669
55	30206	28818
50	30577	29762
45	31009	30428


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.0DEG
 Test Date:2020-8-13

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.429
 Humidity:65.0%
 Test Distance:7.000m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:23.998V I:0.1870A P:4.4876W PF:1.0000 Freq:0Hz Lamp Flux:404.065x1 lm		
NAME: CLK-01-30K	TYPE: LED Strip	WEIGHT: Kg
SPEC.: 4.3W	DIM.: 350*10*10(MM)	SERIAL No.: 001
MFR.: Flexfire LEDs, Inc.	SUR.: 340*10(MM)	Shielding Angle: 120

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.18	1.18	1.18	1.15	1.15	1.15	1.09	1.09	1.09	1.03	1.03	1.03	.98	.98	.98	.96
1.0	1.02	.98	.94	.90	.96	.92	.95	.91	.88	.90	.87	.85	.86	.83	.81	.79
2.0	.89	.82	.76	.87	.80	.75	.82	.77	.72	.78	.74	.70	.75	.71	.68	.66
3.0	.78	.70	.63	.76	.68	.62	.72	.66	.61	.69	.64	.59	.66	.61	.57	.55
4.0	.69	.60	.53	.67	.59	.53	.64	.57	.51	.61	.55	.50	.59	.54	.49	.47
5.0	.62	.53	.46	.60	.52	.45	.58	.50	.44	.55	.49	.44	.53	.47	.43	.41
6.0	.55	.46	.40	.54	.46	.40	.52	.45	.39	.50	.43	.38	.48	.42	.38	.35
7.0	.50	.41	.35	.49	.41	.35	.47	.40	.34	.45	.39	.34	.44	.38	.33	.31
8.0	.46	.37	.31	.45	.37	.31	.43	.36	.31	.42	.35	.30	.40	.34	.30	.28
9.0	.42	.34	.28	.41	.33	.28	.40	.33	.28	.38	.32	.27	.37	.31	.27	.25
10.0	.39	.31	.26	.38	.31	.25	.37	.30	.25	.36	.29	.25	.34	.29	.25	.23

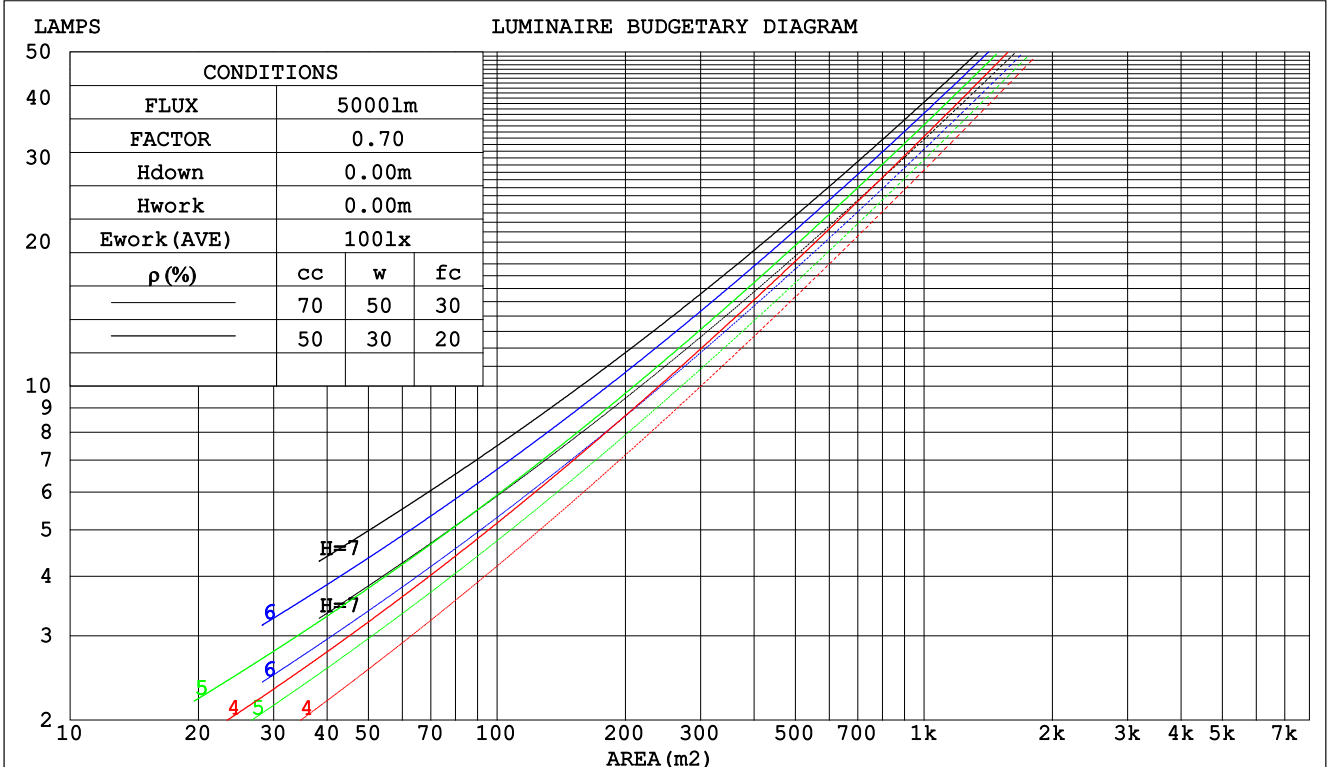

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.0DEG
 Test Date:2020-8-13

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.429
 Humidity:65.0%
 Test Distance:7.000m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:23.998V I:0.1870A P:4.4876W PF:1.0000 Freq:0Hz Lamp Flux:404.065x1 lm		
NAME: CLK-01-30K	TYPE: LED Strip	WEIGHT: Kg
SPEC.: 4.3W	DIM.: 350*10*10(MM)	SERIAL No.: 001
MFR.: Flexfire LEDs, Inc.	SUR.: 340*10(MM)	Shielding Angle: 120

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.322	.183	.058	.313	.179	.057	.298	.171	.055	.283	.163	.052	.270	.156	.050	
2.0	.297	.163	.050	.290	.160	.049	.276	.153	.048	.263	.148	.046	.251	.142	.045	
3.0	.273	.145	.043	.266	.143	.043	.254	.137	.042	.242	.133	.041	.232	.128	.040	
4.0	.251	.130	.038	.245	.128	.038	.234	.124	.037	.223	.120	.036	.214	.116	.035	
5.0	.231	.118	.034	.226	.116	.034	.216	.112	.033	.206	.109	.032	.198	.106	.032	
6.0	.214	.107	.031	.209	.106	.030	.200	.103	.030	.192	.100	.029	.184	.097	.029	
7.0	.199	.098	.028	.194	.097	.028	.186	.094	.027	.179	.092	.027	.172	.089	.026	
8.0	.185	.091	.025	.182	.089	.025	.174	.087	.025	.167	.085	.024	.161	.083	.024	
9.0	.174	.084	.023	.170	.083	.023	.163	.081	.023	.157	.079	.023	.151	.077	.022	
10.0	.163	.078	.022	.160	.077	.022	.154	.075	.021	.148	.074	.021	.143	.072	.021	

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.222	.222	.222	.190	.190	.190	.130	.130	.130	.074	.074	.074	.024	.024	.024	
1.0	.213	.188	.165	.182	.161	.142	.125	.111	.098	.072	.064	.057	.023	.021	.019	
2.0	.205	.164	.129	.176	.141	.112	.120	.098	.078	.069	.057	.046	.022	.018	.015	
3.0	.197	.147	.106	.169	.126	.092	.116	.088	.065	.067	.051	.038	.022	.017	.012	
4.0	.190	.133	.091	.163	.115	.079	.112	.080	.055	.065	.047	.033	.021	.015	.011	
5.0	.182	.123	.080	.156	.107	.069	.108	.074	.049	.062	.044	.029	.020	.014	.010	
6.0	.175	.115	.072	.150	.100	.063	.104	.070	.044	.060	.041	.026	.019	.013	.009	
7.0	.168	.108	.066	.145	.094	.057	.100	.066	.041	.058	.039	.024	.019	.013	.008	
8.0	.162	.102	.062	.139	.089	.054	.096	.062	.038	.056	.037	.023	.018	.012	.008	
9.0	.156	.097	.058	.134	.085	.051	.093	.059	.036	.054	.035	.021	.018	.012	.007	
10.0	.150	.093	.055	.129	.081	.048	.090	.057	.034	.052	.034	.020	.017	.011	.007	

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.0DEG
 Test Date:2020-8-13

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.429
 Humidity:65.0%
 Test Distance:7.000m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:23.998V I:0.1870A P:4.4876W PF:1.0000 Freq:0Hz Lamp Flux:404.065x1 lm										
NAME: CLK-01-30K					TYPE: LED Strip			WEIGHT: Kg		
SPEC.: 4.3W					DIM.: 350*10*10(MM)			SERIAL No.: 001		
MFR.: Flexfire LEDs, Inc.					SUR.: 340*10(MM)			Shielding Angle: 120		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	26.9	28.4	27.3	28.8	29.2	26.5	28.1	27.0	28.5	28.9
3H	28.9	30.3	29.3	30.7	31.2	28.3	29.7	28.7	30.1	30.5
4H	29.8	31.1	30.2	31.5	32.0	28.9	30.2	29.3	30.6	31.1
6H	30.5	31.8	31.0	32.2	32.7	29.2	30.5	29.7	30.9	31.4
8H	30.9	32.1	31.4	32.5	33.0	29.3	30.5	29.8	31.0	31.5
12H	31.2	32.4	31.7	32.8	33.4	29.4	30.5	29.9	31.0	31.5
4H 2H	27.5	28.8	27.9	29.2	29.7	27.2	28.6	27.7	29.0	29.5
3H	29.7	30.9	30.2	31.3	31.8	29.2	30.3	29.7	30.8	31.3
4H	30.7	31.8	31.2	32.3	32.8	29.9	30.9	30.4	31.4	32.0
6H	31.7	32.6	32.2	33.1	33.7	30.4	31.3	30.9	31.8	32.4
8H	32.1	33.0	32.7	33.5	34.1	30.5	31.4	31.1	31.9	32.5
12H	32.6	33.4	33.1	33.9	34.5	30.6	31.4	31.2	31.9	32.5
8H 4H	31.1	31.9	31.6	32.4	33.0	30.3	31.2	30.9	31.7	32.2
6H	32.2	32.9	32.7	33.4	34.0	31.0	31.7	31.5	32.2	32.8
8H	32.7	33.4	33.3	33.9	34.5	31.2	31.8	31.8	32.4	33.0
12H	33.4	33.9	33.9	34.5	35.1	31.3	31.9	31.9	32.4	33.1
12H 4H	31.1	31.8	31.6	32.4	32.9	30.4	31.2	31.0	31.7	32.3
6H	32.2	32.9	32.8	33.4	34.0	31.1	31.8	31.7	32.3	32.9
8H	32.9	33.4	33.5	34.0	34.7	31.4	31.9	32.0	32.5	33.2
CIE190: 2010										

CIE190: 2010
Area: 0.004 m2

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.0DEG
Test Date:2020-8-13

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.429
Humidity:65.0%
Test Distance:7.000m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:23.998V I:0.1870A P:4.4876W PF:1.0000 Freq:0Hz Lamp Flux:404.065x1 lm		
NAME: CLK-01-30K	TYPE: LED Strip	WEIGHT: Kg
SPEC.: 4.3W	DIM.: 350*10*10(MM)	SERIAL No.: 001
MFR.: Flexfire LEDs, Inc.	SUR.: 340*10(MM)	Shielding Angle: 120


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	56	44	37	55	44	37	54	43	37	30
0.80	66	54	47	65	53	46	63	53	46	39
1.00	74	63	55	73	62	55	70	63	54	47
1.25	81	70	63	79	69	62	76	68	61	53
1.50	86	76	69	84	75	68	81	73	67	58
2.00	93	84	77	91	82	76	87	80	74	66
2.50	97	89	82	95	87	81	90	84	79	70
3.00	100	93	87	98	91	86	93	88	83	74
4.00	104	98	93	102	96	92	97	92	88	78
5.00	107	102	97	104	99	95	99	95	92	81
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.0DEG
 Test Date:2020-8-13

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.429
 Humidity:65.0%
 Test Distance:7.000m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:23.998V I:0.1870A P:4.4876W PF:1.0000 Freq:0Hz Lamp Flux:404.065x1 lm		
NAME: CLK-01-30K	TYPE: LED Strip	WEIGHT: Kg
SPEC.: 4.3W	DIM.: 350*10*10 (MM)	SERIAL No.: 001
MFR.: Flexfire LEDs, Inc.	SUR.: 340*10 (MM)	Shielding Angle: 120

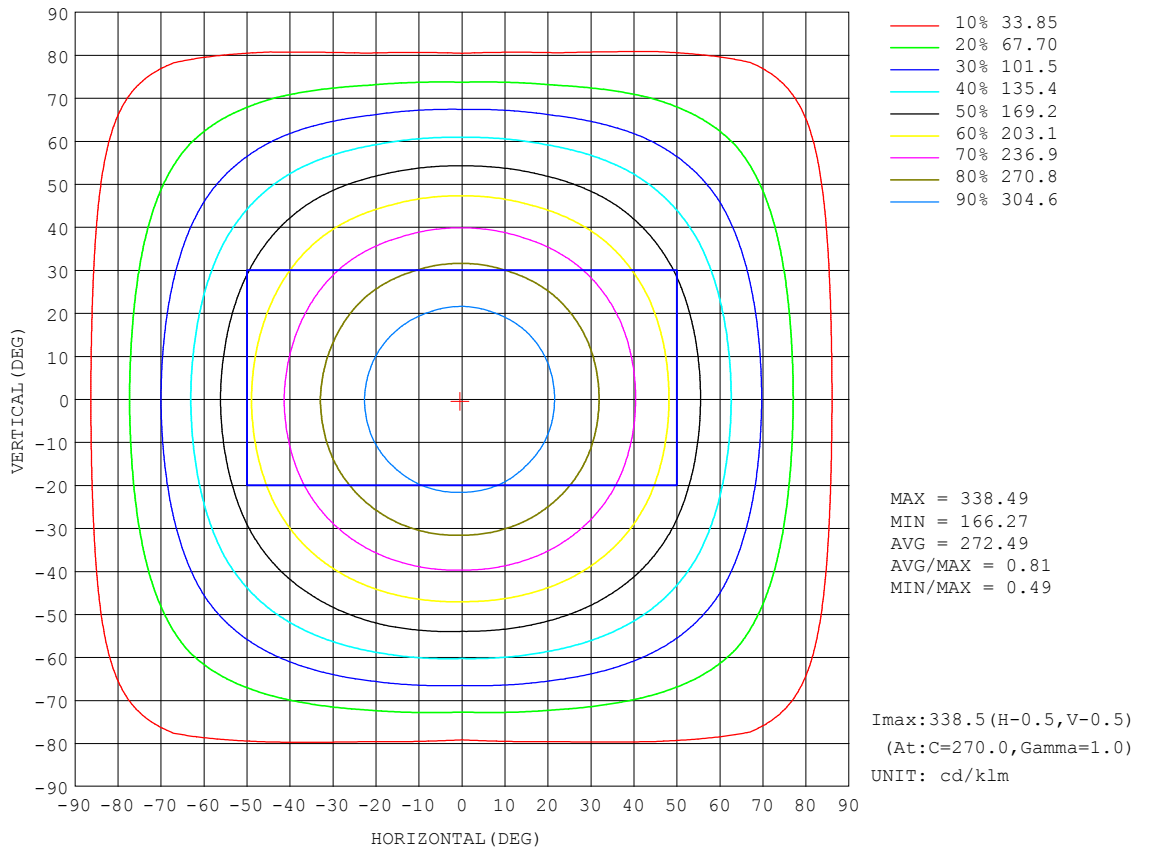


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.0DEG
 Test Date: 2020-8-13

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.429
 Humidity: 65.0%
 Test Distance: 7.000m [K=1.0000]
 Remarks:

AAI Figure

Test:U:23.998V I:0.1870A P:4.4876W PF:1.0000 Freq:0Hz Lamp Flux:404.065x1 lm		
NAME: CLK-01-30K	TYPE: LED Strip	WEIGHT: Kg
SPEC.: 4.3W	DIM.: 350*10*10(MM)	SERIAL No.: 001
MFR.: Flexfire LEDs, Inc.	SUR.: 340*10(MM)	Shielding Angle: 120

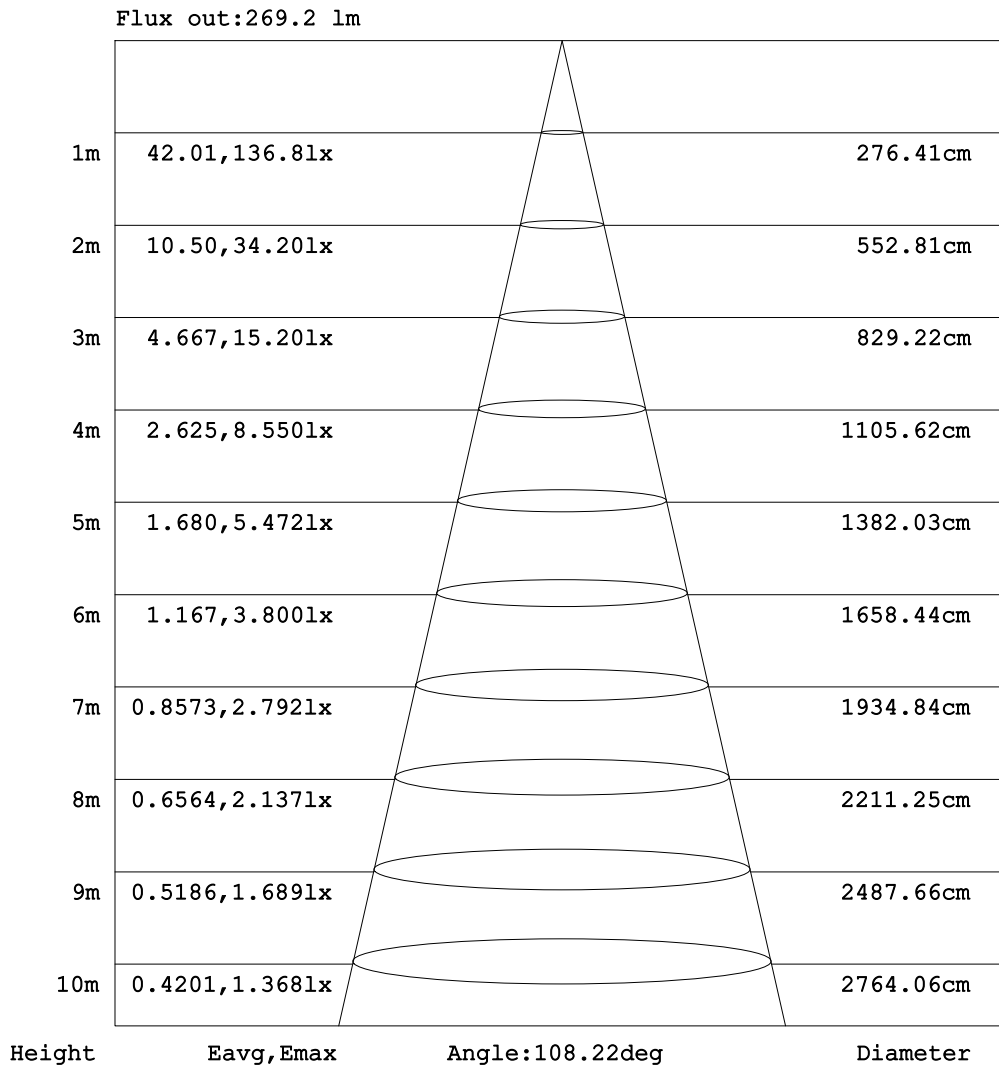


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.0DEG
 Test Date:2020-8-13

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.429
 Humidity:65.0%
 Test Distance:7.000m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:23.998V I:0.1870A P:4.4876W PF:1.0000 Freq:0Hz Lamp Flux:404.065x1 lm		
NAME: CLK-01-30K	TYPE: LED Strip	WEIGHT: Kg
SPEC.: 4.3W	DIM.: 350*10*10 (MM)	SERIAL No.: 001
MFR.: Flexfire LEDs, Inc.	SUR.: 340*10 (MM)	Shielding Angle: 120

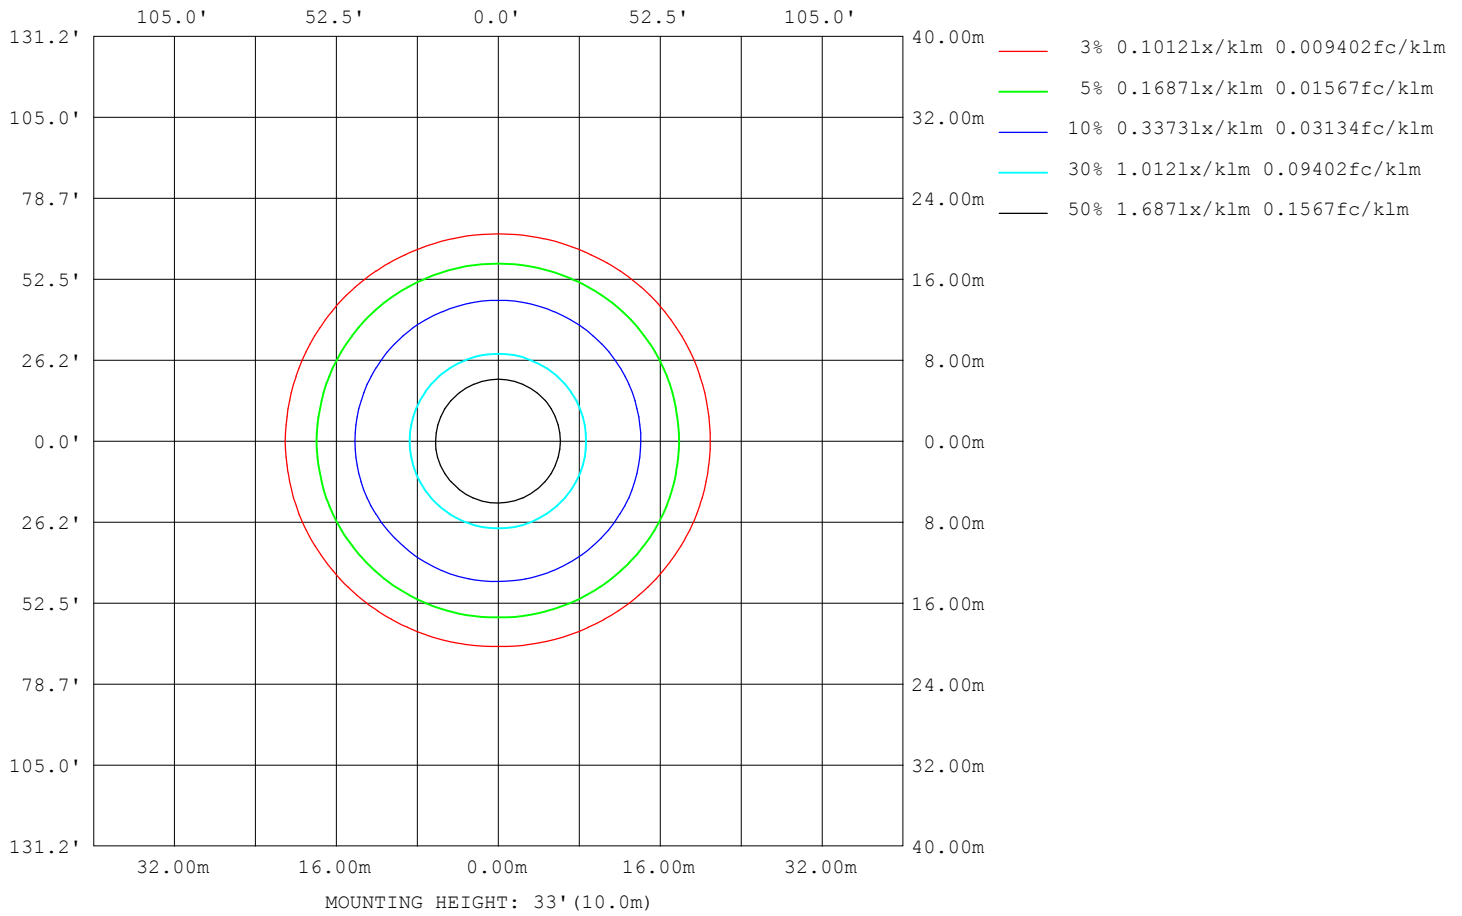

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.0DEG
 Test Date:2020-8-13

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.429
 Humidity:65.0%
 Test Distance:7.000m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:23.998V I:0.1870A P:4.4876W PF:1.0000 Freq:0Hz Lamp Flux:404.065x1 lm		
NAME: CLK-01-30K	TYPE: LED Strip	WEIGHT: Kg
SPEC.: 4.3W	DIM.: 350*10*10 (MM)	SERIAL No.: 001
MFR.: Flexfire LEDs, Inc.	SUR.: 340*10 (MM)	Shielding Angle: 120


AvgL	cd/m2
L_0~180 (65) av	29935
L_0~180 (75) av	30292
L_0~180 (85) av	43582
L_90~270 (65) av	26734
L_90~270 (75) av	22689
L_90~270 (85) av	13581
L_45 (65) av	28513
L_45 (75) av	26989
L_45 (85) av	31350

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.0DEG
 Test Date:2020-8-13

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.429
 Humidity:65.0%
 Test Distance:7.000m [K=1.0000]
 Remarks:

Planar Illuminance Curve

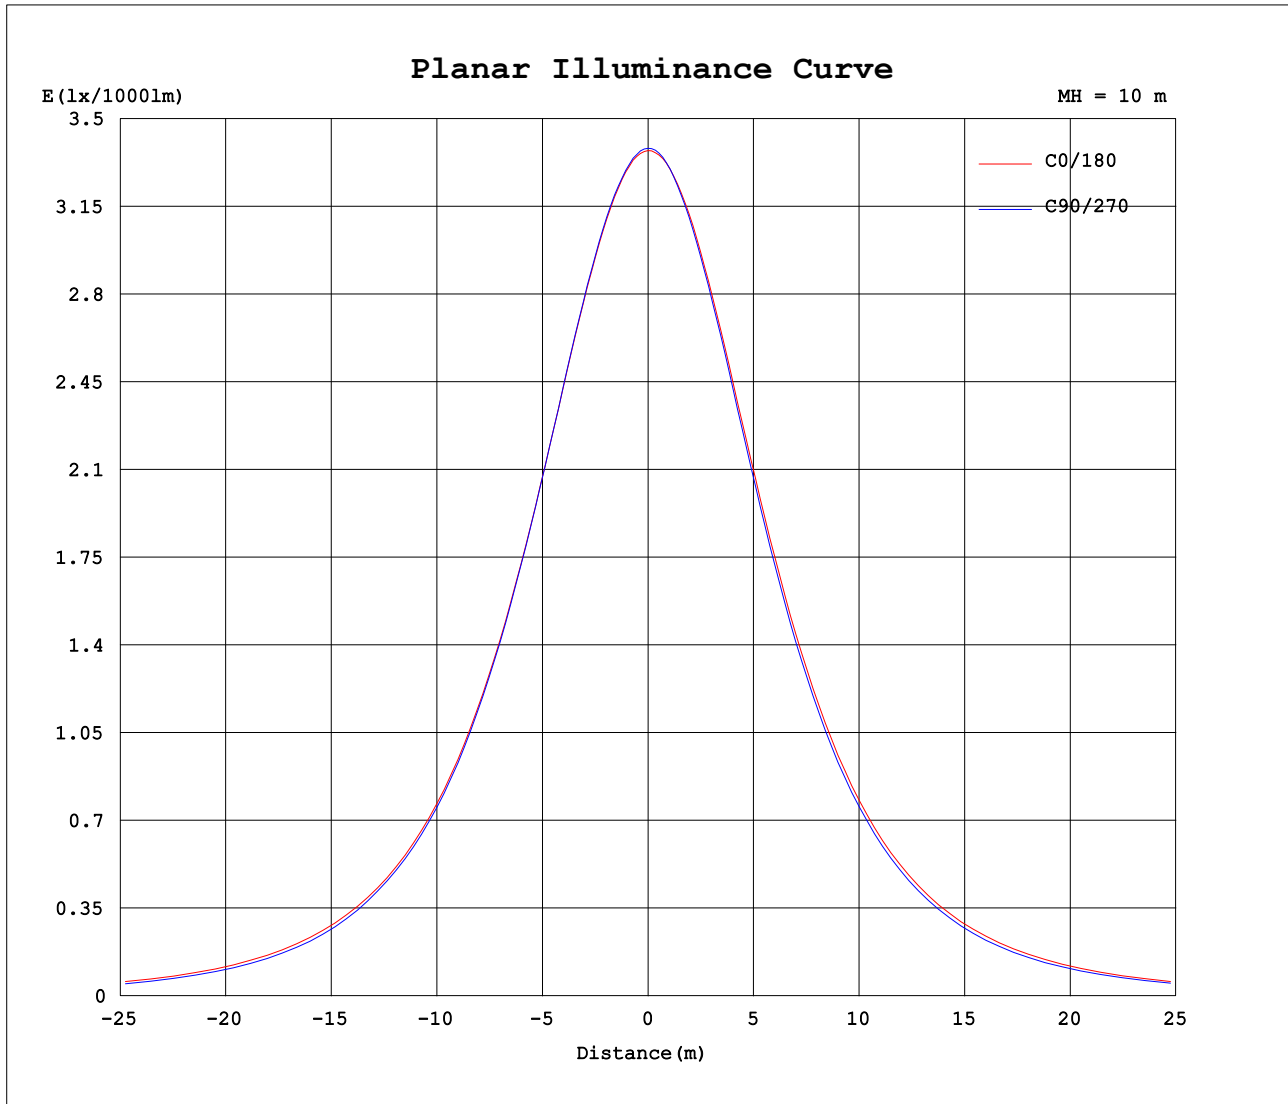

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.0DEG
 Test Date: 2020-8-13

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.429
 Humidity: 65.0%
 Test Distance: 7.000m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:23.998V I:0.1870A P:4.4876W PF:1.0000 Freq:0Hz Lamp Flux:404.065x1 lm		
NAME: CLK-01-30K	TYPE: LED Strip	WEIGHT: Kg
SPEC.: 4.3W	DIM.: 350*10*10(MM)	SERIAL No.: 001
MFR.: Flexfire LEDs, Inc.	SUR.: 340*10(MM)	Shielding Angle: 120

Table--1

UNIT: cd/klm

C (DEG) \ γ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	338	338	338	338	338	338	338	338	338	338	338	338	338	338	338	338			
5	336	336	336	336	336	336	336	336	337	337	336	336	336	336	336	336			
10	330	330	330	330	330	330	331	331	332	332	331	330	330	329	330	330			
15	321	321	320	321	321	322	322	323	324	323	322	321	321	320	321	321			
20	310	309	309	309	309	310	310	311	313	311	310	309	309	308	309	309			
25	295	294	294	294	294	295	296	297	299	297	296	294	294	293	294	294			
30	278	278	277	277	277	278	279	281	282	280	279	277	277	276	277	277			
35	259	259	258	258	257	259	260	262	264	261	260	258	257	257	258	259			
40	239	239	237	236	236	237	239	242	243	241	239	237	236	236	238	239			
45	218	217	215	214	213	215	217	220	222	219	217	214	214	213	216	217			
50	195	195	192	190	189	191	193	197	199	197	194	191	190	190	193	195			
55	172	171	168	165	164	167	169	173	175	173	171	167	165	166	169	171			
60	148	147	143	139	137	140	144	149	151	149	146	141	140	141	145	148			
65	124	123	118	113	110	113	118	124	126	125	121	116	114	115	120	124			
70	100	98.5	92.2	86.3	82.7	86.6	92.8	99.1	102	99.8	95.6	89.6	88.4	89.4	95.4	99.4			
75	77.0	74.5	67.3	60.0	55.5	60.2	67.6	74.9	78.2	75.9	70.8	63.6	60.8	63.7	70.9	75.8			
80	55.4	52.5	44.3	35.5	29.9	35.6	44.5	52.8	56.5	53.8	47.5	39.0	35.5	39.3	47.8	53.7			
85	37.2	34.2	25.5	15.6	9.42	16.0	25.9	34.4	38.0	35.2	28.3	18.7	14.0	18.9	28.5	35.2			
90	24.0	20.8	11.7	5.10	0.50	6.11	14.3	21.5	24.6	22.1	15.7	7.14	1.62	7.13	15.7	22.0			
95	14.5	12.2	8.85	3.52	0.58	4.26	9.83	14.9	17.0	15.0	10.1	4.54	0.58	4.30	9.54	14.7			
100	12.3	11.1	7.88	3.08	0.77	4.18	8.62	12.3	13.7	12.3	8.59	4.37	0.73	4.31	8.27	11.3			
105	11.6	10.4	7.66	3.87	0.95	4.30	8.19	11.3	12.5	11.3	8.14	4.36	0.92	4.50	7.59	10.6			
110	11.1	10.1	7.11	4.27	1.12	4.41	8.00	10.8	11.7	10.6	8.00	4.40	1.10	4.47	7.68	9.50			
115	10.8	9.96	7.36	4.27	1.33	4.44	7.87	10.4	11.1	10.2	7.77	4.39	1.30	4.22	7.71	9.69			
120	9.78	8.70	7.46	4.08	1.53	3.96	7.72	9.99	10.7	9.86	7.59	3.81	1.50	3.87	7.44	9.70			
125	9.73	9.25	7.49	4.06	1.74	3.74	7.54	9.64	10.2	9.47	7.37	3.32	1.70	3.95	7.27	9.31			
130	9.72	9.12	7.14	3.93	1.93	3.56	7.28	9.23	9.74	9.08	7.13	3.24	1.90	3.59	6.57	9.05			
135	9.46	8.85	6.29	3.82	2.12	3.18	6.24	8.73	9.21	8.60	6.06	2.53	2.11	3.46	5.41	8.68			
140	8.65	7.97	5.30	2.41	2.33	2.41	5.60	8.00	8.60	7.75	5.21	2.31	2.31	3.41	4.64	7.81			
145	7.69	6.75	5.02	2.60	2.55	2.57	5.13	6.61	7.08	6.37	4.73	2.53	2.55	2.50	4.28	5.70			
150	6.48	5.15	4.78	2.76	2.75	2.74	4.45	5.28	5.95	5.49	4.21	2.68	2.70	2.66	4.03	4.62			
155	5.49	4.83	2.98	2.91	2.89	2.91	3.04	4.72	4.83	4.37	3.03	2.80	2.85	2.78	3.85	4.16			
160	3.93	3.06	2.98	3.03	2.97	3.03	2.95	3.67	3.62	3.38	2.91	2.92	2.95	2.91	2.93	3.94			
165	3.05	3.06	3.07	3.11	3.09	3.10	3.06	3.08	3.00	2.92	3.04	3.05	3.05	3.02	3.06	3.04			
170	3.11	3.12	3.18	3.17	3.16	3.16	3.13	3.16	3.09	3.04	3.12	3.12	3.14	3.11	3.15	3.13			
175	3.17	3.14	3.18	3.18	3.17	3.18	3.19	3.17	3.16	3.12	3.17	3.18	3.18	3.16	3.16	3.18			
180	3.18	3.11	3.18	3.18	3.18	3.17	3.16	3.17	3.16	3.11	3.18	3.18	3.17	3.16	3.19	3.16			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.0DEG
 Test Date:2020-8-13

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.429
 Humidity:65.0%
 Test Distance:7.000m [K=1.0000]
 Remarks: