
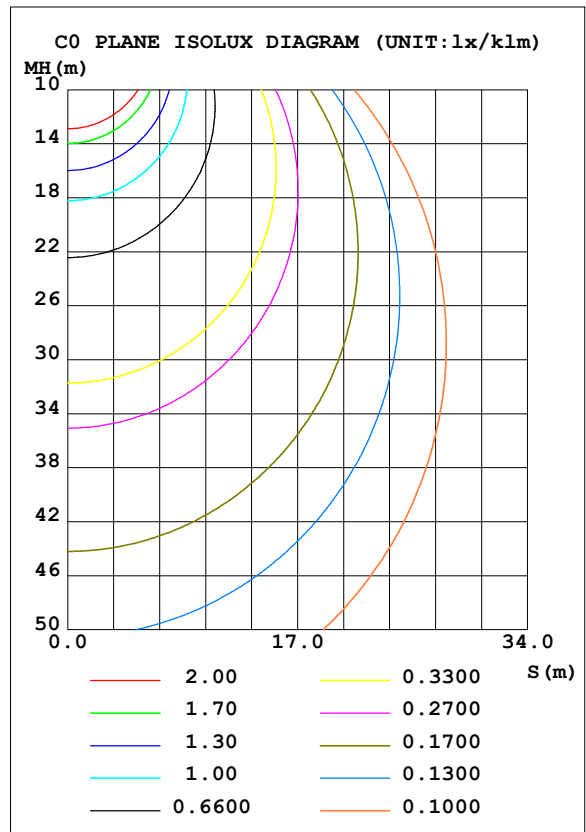


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:23.999V I:0.3684A P:8.8412W PF:1.0000 Freq:0Hz Lamp Flux:917.625x1 lm		
NAME: CLK-01-35K	TYPE: LED Strip	WEIGHT: Kg
SPEC.: 8.6W	DIM.: 500*10*10 (MM)	SERIAL No.: 001
MFR.: Flexfire LEDs, Inc.	SUR.: 500*10 (MM)	Shielding Angle: 120

DATA OF LAMP		PHOTOMETRIC DATA Eff: 103.79 lm/W			
MODEL	SMD /LED	I _{max} (cd/klm)	333.1	S/MH (C0/180)	1.25
NOMINAL POWER (W)	8.84	LOR (%)	100.0	S/MH (C90/270)	1.24
RATED VOLTAGE (V)	24	TOTAL FLUX (lm/klm)	1000.00	η UP, DN (C0-180)	1.7, 48.2
NOMINAL FLUX (lm)	917.625	CIE CLASS	DIRECT	η UP, DN (C180-360)	1.6, 48.5
LAMPS INSIDE	1	η up (%)	3.3	CIBSE SHR NOM	1.25
TEST VOLTAGE (V)	24	η down (%)	96.7	CIBSE SHR MAX	1.35

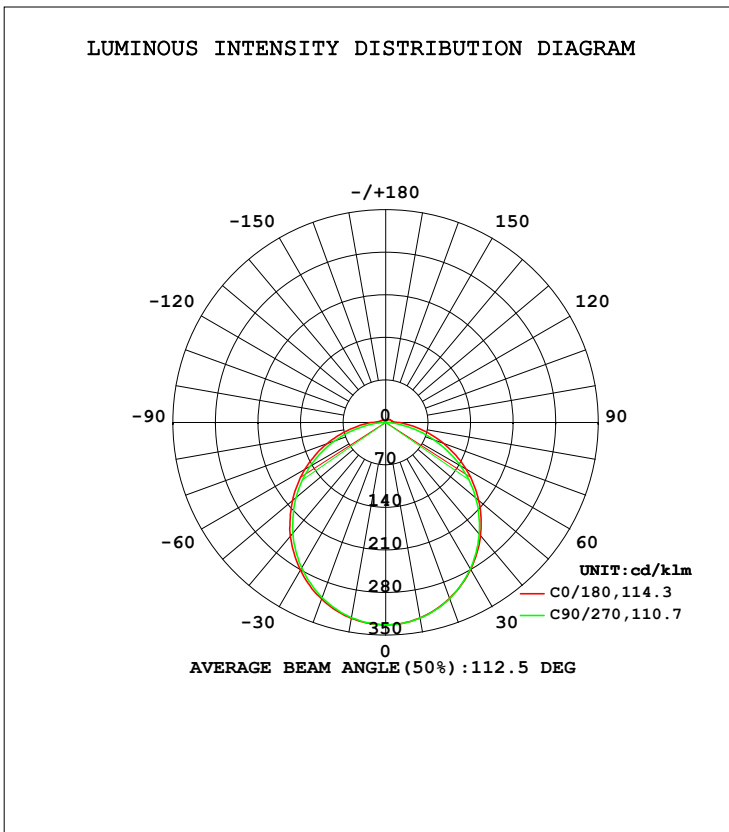

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.0DEG
 Test Date: 2020-8-13

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.429
 Humidity: 65.0%
 Test Distance: 7.000m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	326.6	327.1	326.9	327.0	327.1	326.5	326.0	326.2	0- 10	31.49	31.49	3.15,3.15
20	308.0	308.5	308.3	308.9	309.1	307.8	306.4	307.2	10- 20	89.96	121.5	12.1,12.1
30	279.8	279.4	278.6	280.0	280.8	278.9	276.5	278.0	20- 30	135.8	257.2	25.7,25.7
40	242.9	241.5	239.5	242.3	244.1	241.3	238.1	240.6	30- 40	163.3	420.6	42.1,42.1
50	199.9	197.2	193.7	197.9	200.3	196.9	192.8	196.2	40- 50	169.5	590.0	59,59
60	152.2	147.7	141.9	148.5	153.2	149.0	142.9	148.2	50- 60	154.6	744.7	74.5,74.5
70	101.4	94.26	85.63	95.21	103.2	97.79	90.01	96.91	60- 70	120.7	865.4	86.5,86.5
80	53.45	43.45	30.69	44.39	55.33	47.83	36.61	46.97	70- 80	73.57	939.0	93.9,93.9
90	21.02	12.21	0.4584	12.73	22.11	14.19	1.439	13.84	80- 90	28.34	967.3	96.7,96.7
100	11.33	7.156	0.7797	6.813	11.32	6.845	0.7349	7.185	90-100	9.235	976.5	97.7,97.7
110	9.942	6.672	1.164	5.610	8.785	5.576	1.131	6.452	100-110	6.460	983.0	98.3,98.3
120	9.067	6.131	1.545	4.777	7.231	4.753	1.530	5.593	110-120	5.266	988.3	98.8,98.8
130	8.077	4.446	1.940	3.709	5.897	3.700	1.945	4.534	120-130	4.152	992.4	99.2,99.2
140	6.106	3.737	2.332	2.601	4.342	2.459	2.341	3.464	130-140	2.969	995.4	99.5,99.5
150	4.996	3.484	2.694	2.734	2.709	2.722	2.714	3.255	140-150	2.026	997.4	99.7,99.7
160	3.580	3.100	2.949	2.977	2.862	2.970	2.946	2.962	150-160	1.420	998.8	99.9,99.9
170	3.117	3.160	3.117	3.130	3.091	3.164	3.136	3.111	160-170	0.8687	999.7	100,100
180	3.148	3.179	3.155	3.133	3.137	3.183	3.147	3.130	170-180	0.3013	1000.0	100,100
DEG	LUMINOUS INTENSITY:cd/klm									UNIT:lm/klm		

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.0DEG
 Test Date:2020-8-13

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.429
 Humidity:65.0%
 Test Distance:7.000m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:23.999V I:0.3684A P:8.8412W PF:1.0000 Freq:0Hz Lamp Flux:917.625x1 lm		
NAME: CLK-01-35K	TYPE: LED Strip	WEIGHT: Kg
SPEC.: 8.6W	DIM.: 500*10*10 (MM)	SERIAL No.: 001
MFR.: Flexfire LEDs, Inc.	SUR.: 500*10 (MM)	Shielding Angle: 120

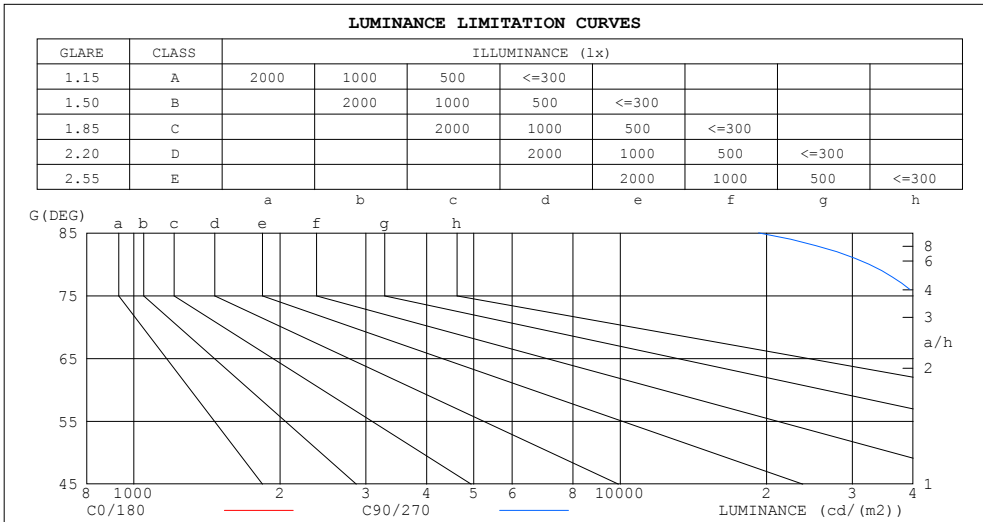

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	72003	19255
80	56325	32465
75	54103	40777
70	54239	45989
65	55096	49440
60	55697	52128
55	56295	53935
50	56898	55352
45	57457	56450


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.0DEG
 Test Date:2020-8-13

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.429
 Humidity:65.0%
 Test Distance:7.000m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:23.999V I:0.3684A P:8.8412W PF:1.0000 Freq:0Hz Lamp Flux:917.625x1 lm		
NAME: CLK-01-35K	TYPE: LED Strip	WEIGHT: Kg
SPEC.: 8.6W	DIM.: 500*10*10(MM)	SERIAL No.: 001
MFR.: Flexfire LEDs, Inc.	SUR.: 500*10(MM)	Shielding Angle: 120

ρcc	80%			70%			50%			30%			10%			0		
	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0		
ρw	0																	
ρfc	20%			20%			20%			20%			20%			0		
RCR	RCR:Room Cavity Ratio Coefficients of Utilization(CU)																	
0.0	1.18	1.18	1.18	1.15	1.15	1.15	1.09	1.09	1.09	1.04	1.04	1.04	.99	.99	.99	.97		
1.0	1.02	.98	.94	.90	.96	.92	.95	.92	.89	.91	.88	.85	.86	.84	.82	.80		
2.0	.89	.82	.76	.87	.80	.75	.83	.77	.73	.79	.74	.70	.75	.72	.68	.66		
3.0	.78	.70	.63	.76	.68	.62	.73	.66	.61	.69	.64	.59	.66	.62	.58	.55		
4.0	.69	.60	.53	.67	.59	.53	.64	.57	.52	.62	.56	.51	.59	.54	.49	.47		
5.0	.62	.52	.46	.60	.52	.45	.58	.50	.44	.55	.49	.44	.53	.48	.43	.41		
6.0	.55	.46	.40	.54	.46	.40	.52	.45	.39	.50	.43	.38	.48	.42	.38	.36		
7.0	.50	.41	.35	.49	.41	.35	.47	.40	.34	.46	.39	.34	.44	.38	.33	.31		
8.0	.46	.37	.31	.45	.37	.31	.43	.36	.31	.42	.35	.30	.40	.34	.30	.28		
9.0	.42	.34	.28	.41	.33	.28	.40	.33	.28	.39	.32	.27	.37	.31	.27	.25		
10.0	.39	.31	.25	.38	.30	.25	.37	.30	.25	.36	.29	.25	.35	.29	.25	.23		

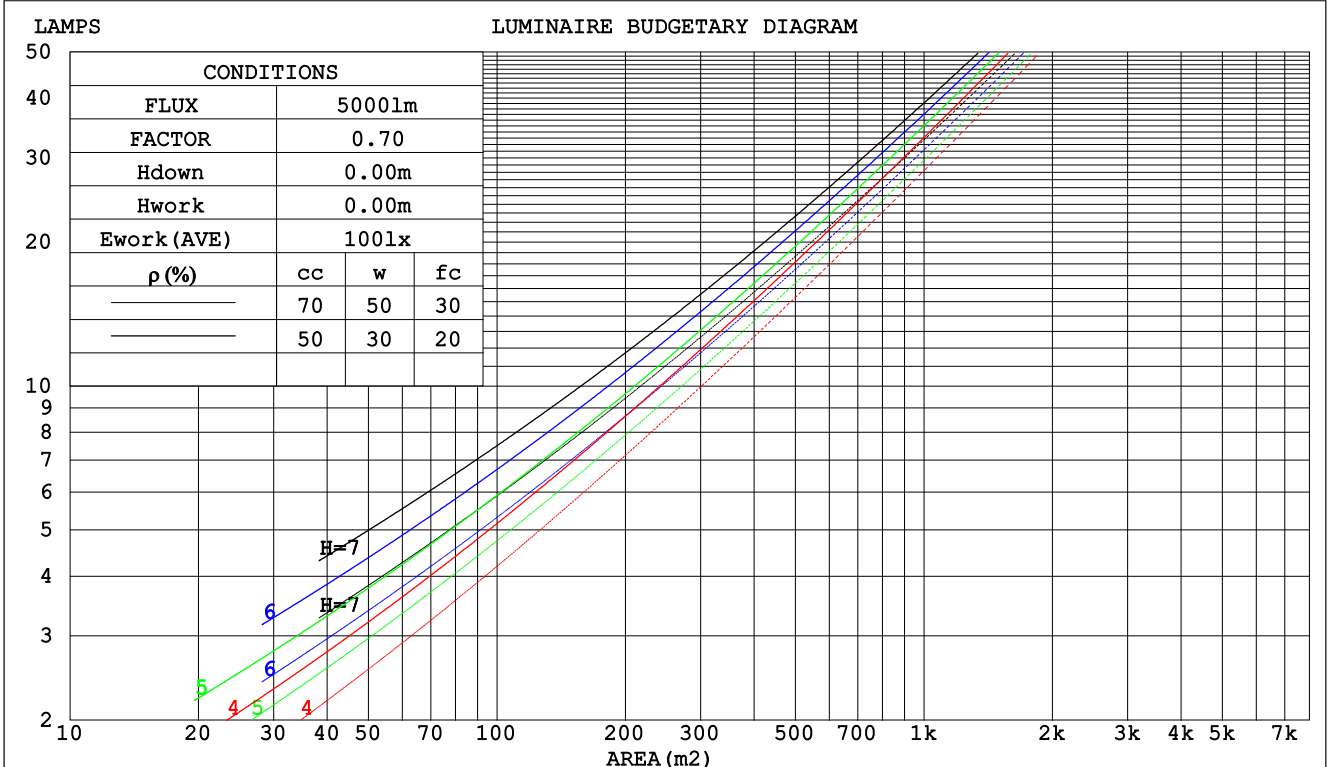

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.0DEG
 Test Date:2020-8-13

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.429
 Humidity:65.0%
 Test Distance:7.000m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:23.999V I:0.3684A P:8.8412W PF:1.0000 Freq:0Hz Lamp Flux:917.625x1 lm								
NAME: CLK-01-35K			TYPE: LED Strip			WEIGHT: Kg		
SPEC.: 8.6W			DIM.: 500*10*10(MM)			SERIAL No.: 001		
MFR.: Flexfire LEDs, Inc.			SUR.: 500*10(MM)			Shielding Angle: 120		

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.322	.183	.058	.314	.179	.057	.299	.171	.055	.285	.164	.053	.272	.158	.051	
2.0	.298	.163	.050	.291	.160	.049	.277	.154	.048	.265	.149	.047	.253	.143	.045	
3.0	.274	.146	.044	.267	.143	.043	.255	.138	.042	.244	.134	.041	.234	.130	.040	
4.0	.252	.131	.038	.246	.129	.038	.235	.125	.037	.225	.121	.036	.216	.117	.036	
5.0	.232	.118	.034	.227	.116	.034	.217	.113	.033	.208	.110	.033	.200	.107	.032	
6.0	.215	.108	.031	.210	.106	.031	.202	.103	.030	.193	.101	.030	.186	.098	.029	
7.0	.199	.099	.028	.195	.097	.028	.188	.095	.027	.180	.093	.027	.174	.090	.027	
8.0	.186	.091	.026	.182	.090	.025	.175	.088	.025	.169	.086	.025	.163	.084	.024	
9.0	.174	.084	.024	.171	.083	.023	.165	.081	.023	.159	.080	.023	.153	.078	.022	
10.0	.164	.078	.022	.161	.078	.022	.155	.076	.021	.150	.074	.021	.144	.073	.021	

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.215	.215	.215	.184	.184	.184	.126	.126	.126	.072	.072	.072	.023	.023	.023	
1.0	.206	.181	.159	.176	.155	.136	.121	.107	.094	.069	.062	.055	.022	.020	.018	
2.0	.198	.157	.123	.170	.135	.106	.116	.094	.074	.067	.054	.043	.022	.018	.014	
3.0	.191	.140	.099	.163	.121	.086	.112	.084	.060	.065	.049	.036	.021	.016	.012	
4.0	.183	.127	.083	.157	.109	.073	.108	.076	.051	.062	.045	.030	.020	.015	.010	
5.0	.175	.116	.073	.151	.101	.063	.104	.070	.045	.060	.041	.026	.019	.013	.009	
6.0	.168	.108	.065	.145	.094	.056	.100	.065	.040	.058	.039	.024	.019	.013	.008	
7.0	.161	.101	.059	.139	.088	.051	.096	.061	.036	.056	.036	.022	.018	.012	.007	
8.0	.155	.095	.054	.133	.083	.047	.092	.058	.034	.054	.034	.020	.017	.011	.007	
9.0	.149	.090	.051	.128	.079	.045	.089	.055	.032	.052	.033	.019	.017	.011	.006	
10.0	.143	.086	.048	.123	.075	.042	.086	.053	.030	.050	.031	.018	.016	.010	.006	

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.0DEG
 Test Date:2020-8-13

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.429
 Humidity:65.0%
 Test Distance:7.000m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:23.999V I:0.3684A P:8.8412W PF:1.0000 Freq:0Hz Lamp Flux:917.625x1 lm										
NAME: CLK-01-35K					TYPE: LED Strip			WEIGHT: Kg		
SPEC.: 8.6W					DIM.: 500*10*10(MM)			SERIAL No.: 001		
MFR.: Flexfire LEDs, Inc.					SUR.: 500*10(MM)			Shielding Angle: 120		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	26.3	27.8	26.7	28.2	28.6	26.0	27.6	26.4	28.0	28.4
3H	28.3	29.7	28.7	30.1	30.5	27.7	29.2	28.2	29.6	30.0
4H	29.1	30.5	29.6	30.9	31.3	28.3	29.7	28.8	30.1	30.6
6H	29.8	31.1	30.3	31.5	32.0	28.7	30.0	29.2	30.4	30.9
8H	30.1	31.3	30.6	31.8	32.3	28.8	30.0	29.3	30.5	30.9
12H	30.5	31.6	30.9	32.1	32.6	28.8	30.0	29.3	30.4	30.9
4H 2H	26.9	28.2	27.3	28.7	29.1	26.7	28.0	27.1	28.5	28.9
3H	29.1	30.3	29.6	30.7	31.2	28.7	29.8	29.1	30.3	30.7
4H	30.1	31.1	30.6	31.6	32.1	29.4	30.4	29.9	30.9	31.4
6H	31.0	31.9	31.5	32.4	32.9	29.9	30.8	30.4	31.3	31.8
8H	31.4	32.2	31.9	32.7	33.3	30.0	30.9	30.5	31.4	31.9
12H	31.8	32.6	32.3	33.1	33.6	30.1	30.9	30.6	31.4	31.9
8H 4H	30.4	31.3	30.9	31.8	32.3	29.8	30.7	30.3	31.2	31.7
6H	31.4	32.2	32.0	32.7	33.3	30.5	31.2	31.0	31.7	32.3
8H	32.0	32.6	32.5	33.2	33.7	30.7	31.3	31.2	31.9	32.4
12H	32.5	33.1	33.1	33.6	34.3	30.8	31.3	31.3	31.9	32.5
12H 4H	30.4	31.2	31.0	31.7	32.3	29.9	30.6	30.4	31.2	31.7
6H	31.5	32.2	32.1	32.7	33.3	30.6	31.2	31.1	31.7	32.4
8H	32.1	32.7	32.6	33.2	33.8	30.8	31.4	31.4	32.0	32.6
CIE190: 2010										

CIE190: 2010
Area: 0.005 m2

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.0DEG
Test Date:2020-8-13

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.429
Humidity:65.0%
Test Distance:7.000m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:23.999V I:0.3684A P:8.8412W PF:1.0000 Freq:0Hz Lamp Flux:917.625x1 lm		
NAME: CLK-01-35K	TYPE: LED Strip	WEIGHT: Kg
SPEC.: 8.6W	DIM.: 500*10*10(MM)	SERIAL No.: 001
MFR.: Flexfire LEDs, Inc.	SUR.: 500*10(MM)	Shielding Angle: 120


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	56	44	37	55	44	37	54	43	37	30
0.80	66	54	47	65	54	46	63	53	46	39
1.00	74	63	55	73	62	55	70	63	54	47
1.25	81	70	63	80	70	62	77	68	62	54
1.50	86	76	69	84	75	68	81	73	67	59
2.00	93	84	77	91	83	76	87	80	75	66
2.50	97	89	83	95	87	82	91	84	79	70
3.00	101	93	87	98	91	86	94	88	84	74
4.00	105	99	94	102	97	92	97	93	89	79
5.00	107	102	98	104	100	96	99	96	92	82
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.0DEG
 Test Date:2020-8-13

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.429
 Humidity:65.0%
 Test Distance:7.000m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:23.999V I:0.3684A P:8.8412W PF:1.0000 Freq:0Hz Lamp Flux:917.625x1 lm		
NAME: CLK-01-35K	TYPE: LED Strip	WEIGHT: Kg
SPEC.: 8.6W	DIM.: 500*10*10 (MM)	SERIAL No.: 001
MFR.: Flexfire LEDs, Inc.	SUR.: 500*10 (MM)	Shielding Angle: 120

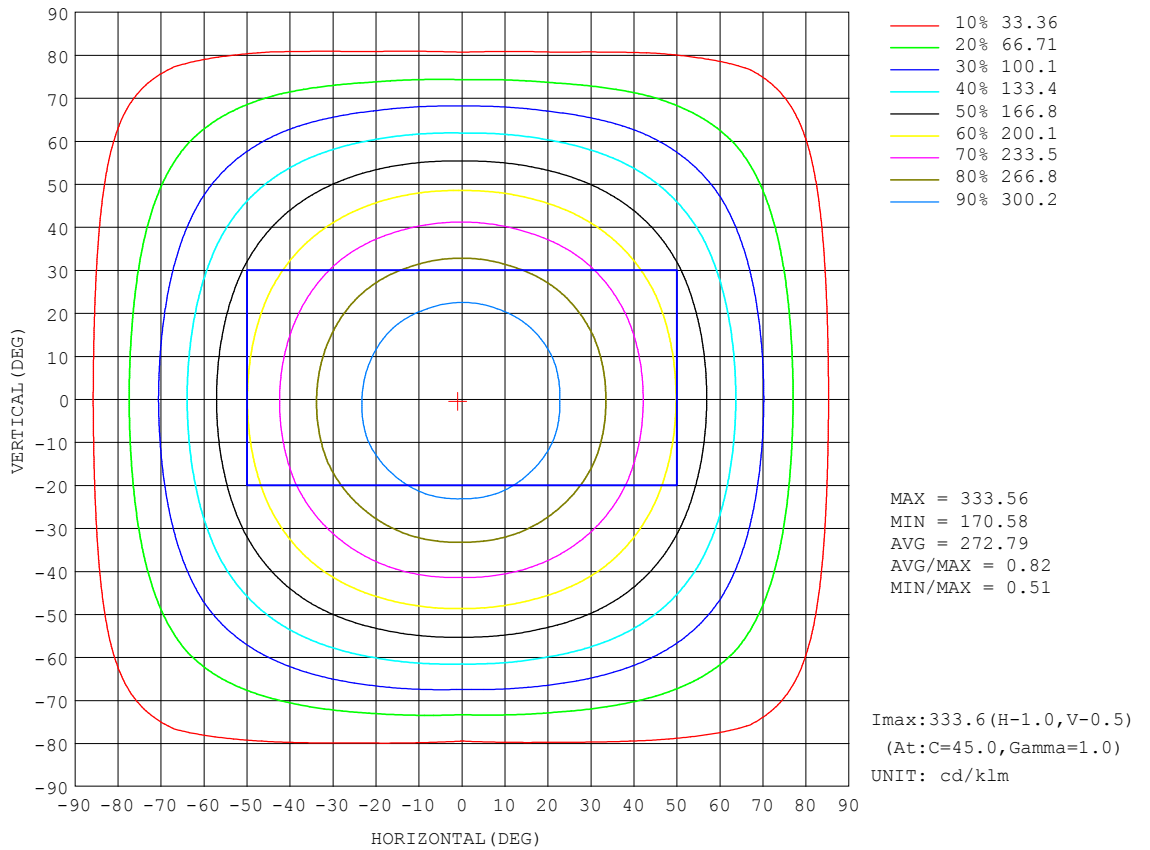


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.0DEG
 Test Date:2020-8-13

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.429
 Humidity:65.0%
 Test Distance:7.000m [K=1.0000]
 Remarks:

AAI Figure

Test:U:23.999V I:0.3684A P:8.8412W PF:1.0000 Freq:0Hz Lamp Flux:917.625x1 lm		
NAME: CLK-01-35K	TYPE: LED Strip	WEIGHT: Kg
SPEC.: 8.6W	DIM.: 500*10*10 (MM)	SERIAL No.: 001
MFR.: Flexfire LEDs, Inc.	SUR.: 500*10 (MM)	Shielding Angle: 120

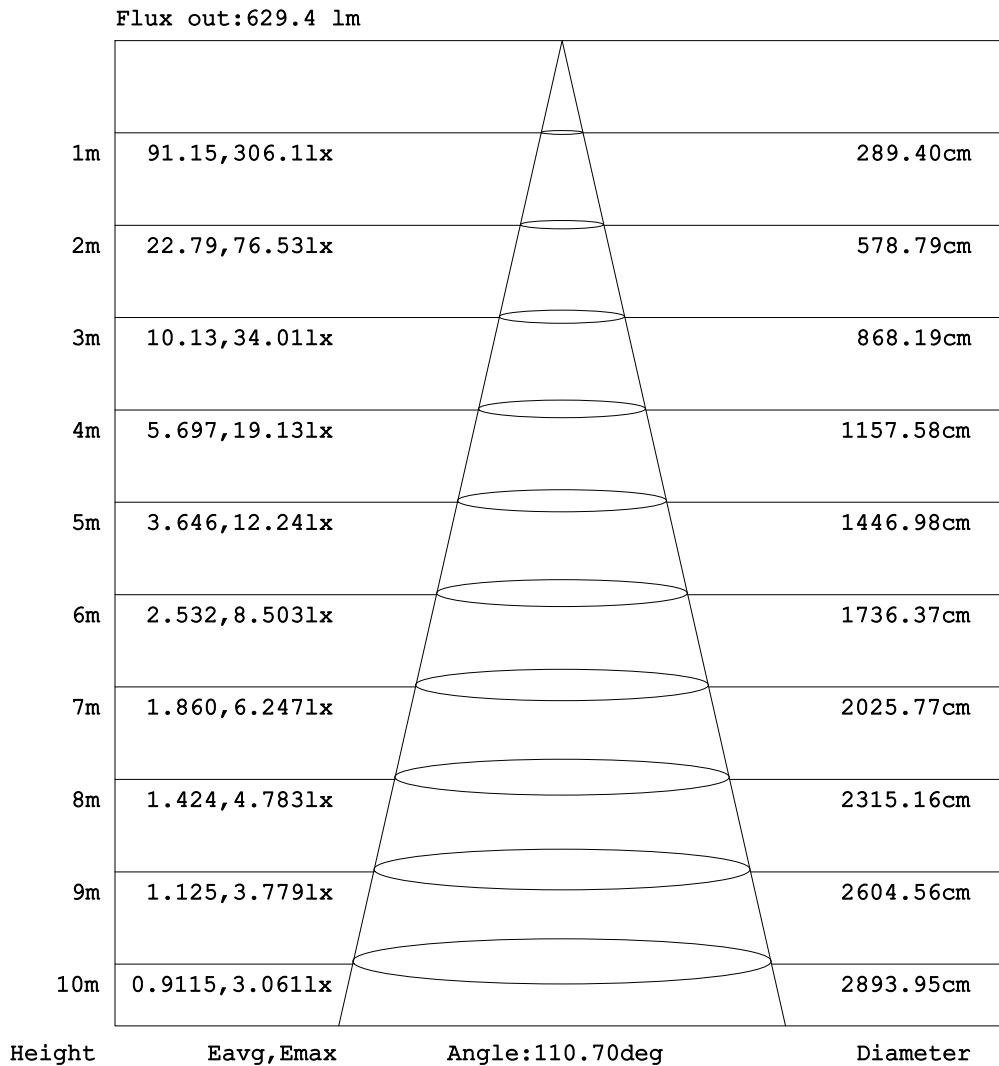


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.0DEG
 Test Date: 2020-8-13

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.429
 Humidity: 65.0%
 Test Distance: 7.000m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:23.999V I:0.3684A P:8.8412W PF:1.0000 Freq:0Hz Lamp Flux:917.625x1 lm		
NAME: CLK-01-35K	TYPE: LED Strip	WEIGHT: Kg
SPEC.: 8.6W	DIM.: 500*10*10 (MM)	SERIAL No.: 001
MFR.: Flexfire LEDs, Inc.	SUR.: 500*10 (MM)	Shielding Angle: 120

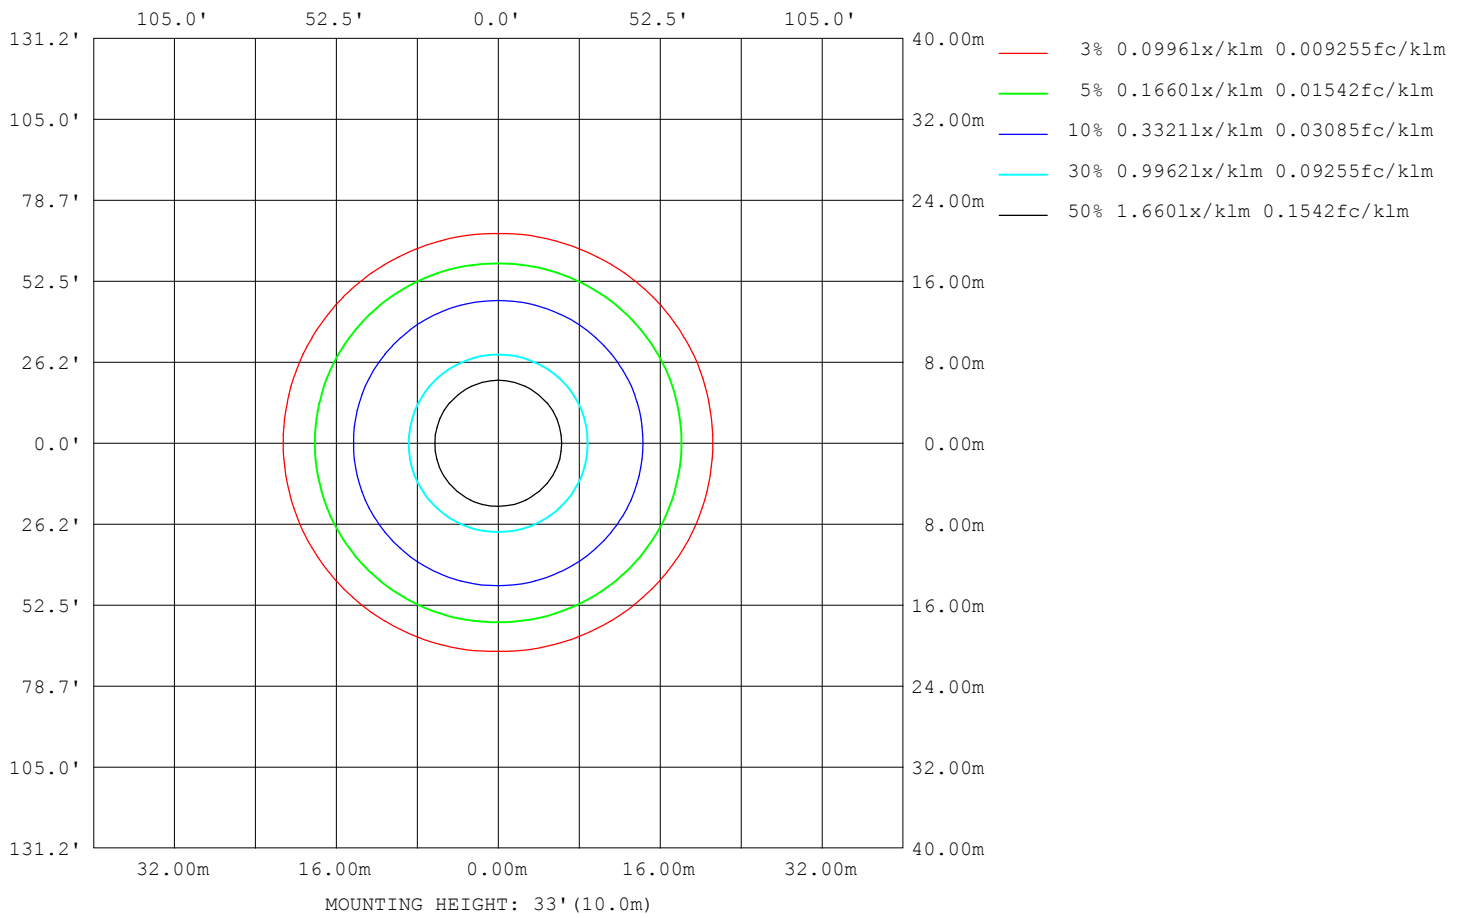

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.0DEG
 Test Date:2020-8-13

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.429
 Humidity:65.0%
 Test Distance:7.000m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:23.999V I:0.3684A P:8.8412W PF:1.0000 Freq:0Hz Lamp Flux:917.625x1 lm		
NAME: CLK-01-35K	TYPE: LED Strip	WEIGHT: Kg
SPEC.: 8.6W	DIM.: 500*10*10(MM)	SERIAL No.: 001
MFR.: Flexfire LEDs, Inc.	SUR.: 500*10(MM)	Shielding Angle: 120


AvgL	cd/m2
L_0~180 (65) av	55513
L_0~180 (75) av	54923
L_0~180 (85) av	73911
L_90~270 (65) av	50028
L_90~270 (75) av	42593
L_90~270 (85) av	24806
L_45 (65) av	53116
L_45 (75) av	49685
L_45 (85) av	54145

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.0DEG
 Test Date:2020-8-13

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.429
 Humidity:65.0%
 Test Distance:7.000m [K=1.0000]
 Remarks:

Planar Illuminance Curve

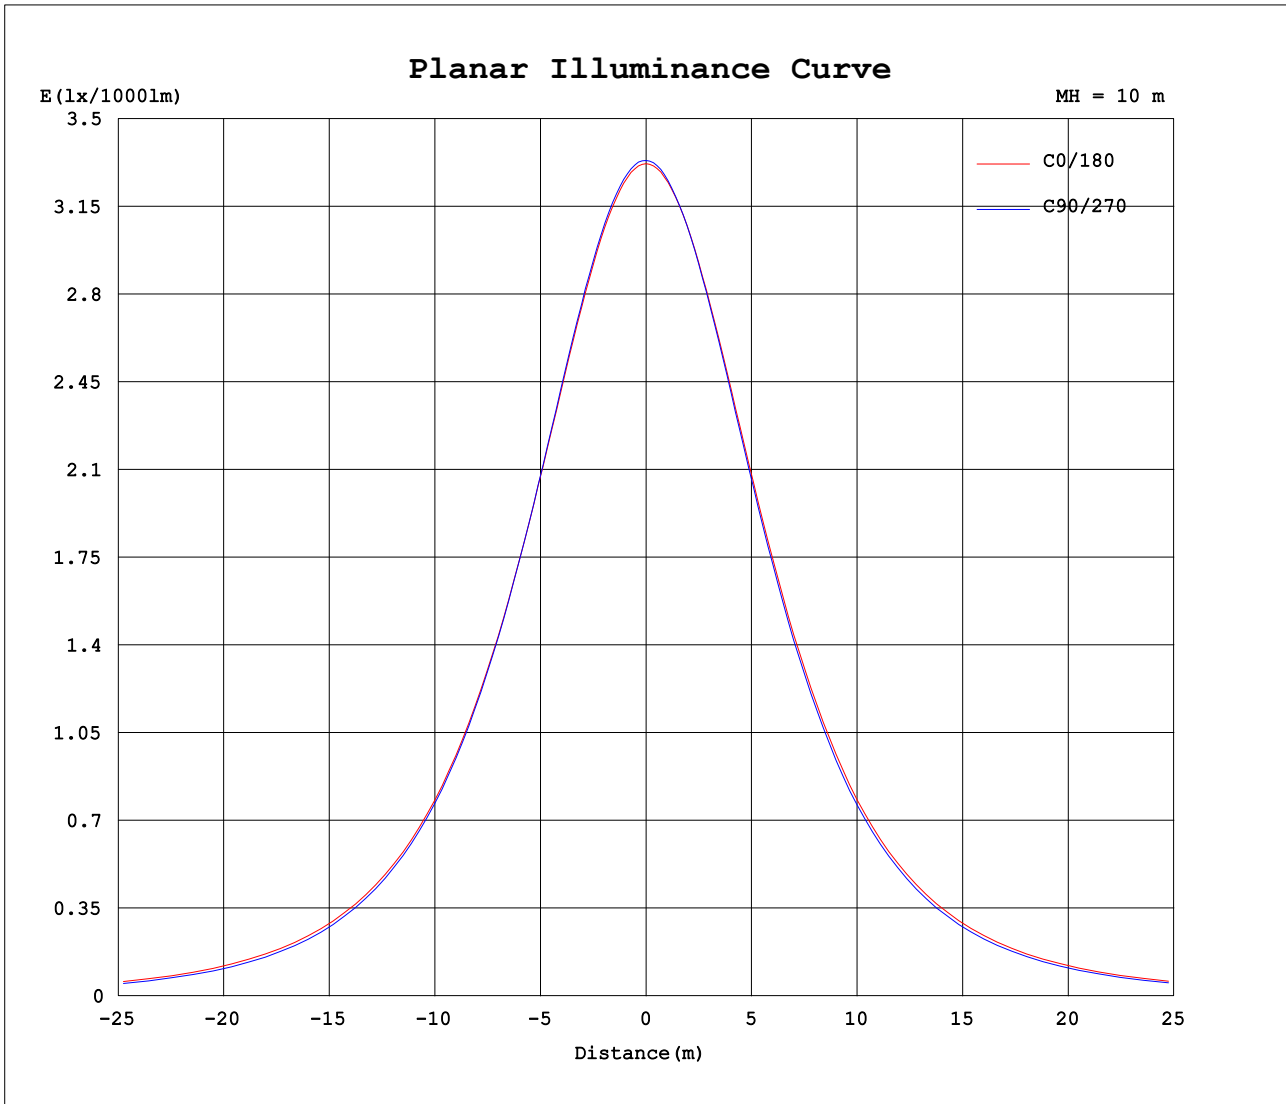

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.0DEG
 Test Date:2020-8-13

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.429
 Humidity:65.0%
 Test Distance:7.000m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:23.999V I:0.3684A P:8.8412W PF:1.0000 Freq:0Hz Lamp Flux:917.625x1 lm		
NAME: CLK-01-35K	TYPE: LED Strip	WEIGHT: Kg
SPEC.: 8.6W	DIM.: 500*10*10(MM)	SERIAL No.: 001
MFR.: Flexfire LEDs, Inc.	SUR.: 500*10(MM)	Shielding Angle: 120

Table--1

UNIT: cd/klm

C (DEG) \ γ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	333	333	333	333	333	333	333	333	333	333	333	333	333	333	333	333			
5	331	332	332	332	332	332	332	332	331	331	331	331	331	331	331	331			
10	327	327	327	327	327	327	327	327	327	327	327	326	326	326	326	326			
15	319	319	319	320	319	320	319	320	320	319	319	318	318	318	318	318			
20	308	309	308	309	308	309	309	310	309	308	308	307	306	306	307	308			
25	295	296	295	295	295	296	296	296	296	295	294	293	293	293	294	294			
30	280	280	279	279	279	280	280	281	281	280	279	277	277	276	278	279			
35	262	263	261	261	260	261	262	264	263	262	261	259	258	258	260	261			
40	243	243	242	241	240	241	242	244	244	243	241	239	238	238	241	242			
45	222	221	220	218	217	218	221	222	222	222	219	217	215	217	219	221			
50	200	199	197	194	194	195	198	200	200	200	197	195	193	194	196	199			
55	176	175	173	170	168	170	174	176	177	176	174	171	168	170	173	176			
60	152	151	148	144	142	144	149	152	153	152	149	146	143	145	148	152			
65	127	126	121	117	114	118	122	126	128	127	124	119	117	118	123	127			
70	101	99.9	94.3	89.1	85.6	90.0	95.2	101	103	101	97.8	92.3	90.0	91.5	96.9	101			
75	76.5	74.5	68.0	61.5	57.5	62.7	68.9	75.4	78.4	76.5	72.1	65.7	62.7	65.0	71.3	75.5			
80	53.5	51.0	43.4	35.7	30.7	36.7	44.4	52.0	55.3	53.0	47.8	40.3	36.6	39.6	47.0	52.1			
85	34.3	31.6	23.8	15.0	9.14	15.6	24.7	32.7	35.9	33.5	27.5	18.7	14.4	18.4	26.8	32.6			
90	21.0	18.7	12.2	4.65	0.46	5.21	12.7	19.4	22.1	19.9	14.2	6.32	1.44	6.27	13.8	19.3			
95	14.1	12.4	8.02	3.23	0.61	3.36	8.20	12.7	14.6	12.9	8.56	3.58	0.57	3.78	8.50	12.6			
100	11.3	10.1	7.16	3.28	0.78	3.02	6.81	10.0	11.3	9.99	6.84	3.17	0.73	3.67	7.19	10.1			
105	10.4	9.45	6.89	3.45	0.97	2.83	6.11	8.84	9.81	8.75	6.10	2.93	0.93	3.71	6.81	9.38			
110	9.94	8.97	6.67	3.55	1.16	2.61	5.61	7.97	8.78	7.88	5.58	2.66	1.13	3.67	6.45	8.87			
115	9.48	8.62	6.35	3.06	1.35	2.29	5.20	7.26	7.92	7.17	5.17	2.32	1.33	3.07	5.86	8.13			
120	9.07	8.18	6.13	2.61	1.54	1.91	4.78	6.67	7.23	6.58	4.75	1.92	1.53	2.74	5.59	7.33			
125	8.59	7.74	5.72	2.78	1.75	1.88	4.28	6.07	6.57	5.97	4.26	1.83	1.74	2.73	5.21	7.40			
130	8.08	7.22	4.45	2.67	1.94	1.96	3.71	5.43	5.90	5.35	3.70	1.95	1.95	2.61	4.53	6.55			
135	7.30	6.59	4.09	2.65	2.12	2.13	3.01	4.63	5.15	4.64	2.95	2.14	2.14	2.59	3.63	5.67			
140	6.11	5.19	3.74	2.67	2.33	2.34	2.60	3.76	4.34	3.73	2.46	2.33	2.34	2.59	3.46	4.90			
145	5.40	4.38	3.52	2.68	2.54	2.55	2.62	3.05	3.31	2.89	2.57	2.56	2.55	2.63	3.39	4.31			
150	5.00	3.99	3.48	2.71	2.69	2.72	2.73	2.82	2.71	2.67	2.72	2.72	2.71	2.67	3.25	3.75			
155	4.54	3.77	3.28	2.86	2.84	2.85	2.86	2.89	2.74	2.74	2.84	2.85	2.83	2.79	3.10	3.44			
160	3.58	3.42	3.10	2.97	2.95	2.96	2.98	2.95	2.86	2.83	2.97	2.95	2.95	2.91	2.96	3.24			
165	3.23	3.07	3.09	3.07	3.05	3.07	3.06	3.08	2.99	2.98	3.08	3.06	3.05	3.03	3.02	3.06			
170	3.12	3.12	3.16	3.15	3.12	3.14	3.13	3.15	3.09	3.09	3.16	3.15	3.14	3.10	3.11	3.11			
175	3.17	3.15	3.21	3.18	3.17	3.16	3.18	3.17	3.16	3.14	3.21	3.19	3.17	3.17	3.17	3.16			
180	3.15	3.12	3.18	3.17	3.15	3.14	3.13	3.13	3.14	3.13	3.18	3.17	3.15	3.14	3.13	3.13			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.0DEG
 Test Date:2020-8-13

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.429
 Humidity:65.0%
 Test Distance:7.000m [K=1.0000]
 Remarks: