
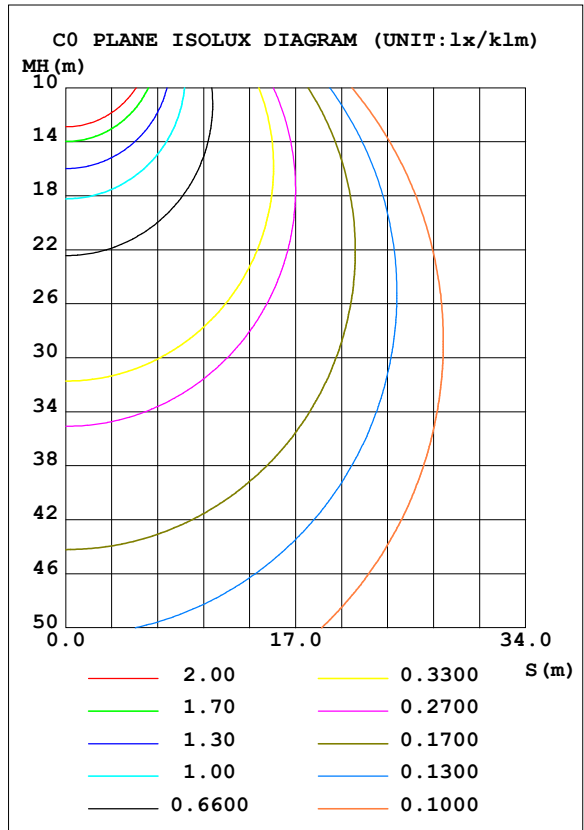


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:23.999V I:0.1932A P:4.6366W PF:1.0000 Freq:0Hz Lamp Flux:446.247x1 lm		
NAME: CLK-01-40K	TYPE: LED Strip	WEIGHT: Kg
SPEC.: 4.3W	DIM.: 350*10*10 (MM)	SERIAL No.: 001
MFR.: Flexfire LEDs, Inc.	SUR.: 340*10 (MM)	Shielding Angle: 120

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 96.24 lm/W
MODEL	SMD /LED	I _{max} (cd/klm)	333.1	S/MH (C0/180)	1.25	
NOMINAL POWER (W)	4.63	LOR (%)	100.0	S/MH (C90/270)	1.24	
RATED VOLTAGE (V)	24	TOTAL FLUX (lm/klm)	1000.0	η UP, DN (C0-180)	1.7, 47.9	
NOMINAL FLUX (lm)	446.247	CIE CLASS	DIRECT	η UP, DN (C180-360)	1.8, 48.5	
LAMPS INSIDE	1	η up (%)	3.5	CIBSE SHR NOM	1.25	
TEST VOLTAGE (V)	24	η down (%)	96.5	CIBSE SHR MAX	1.35	

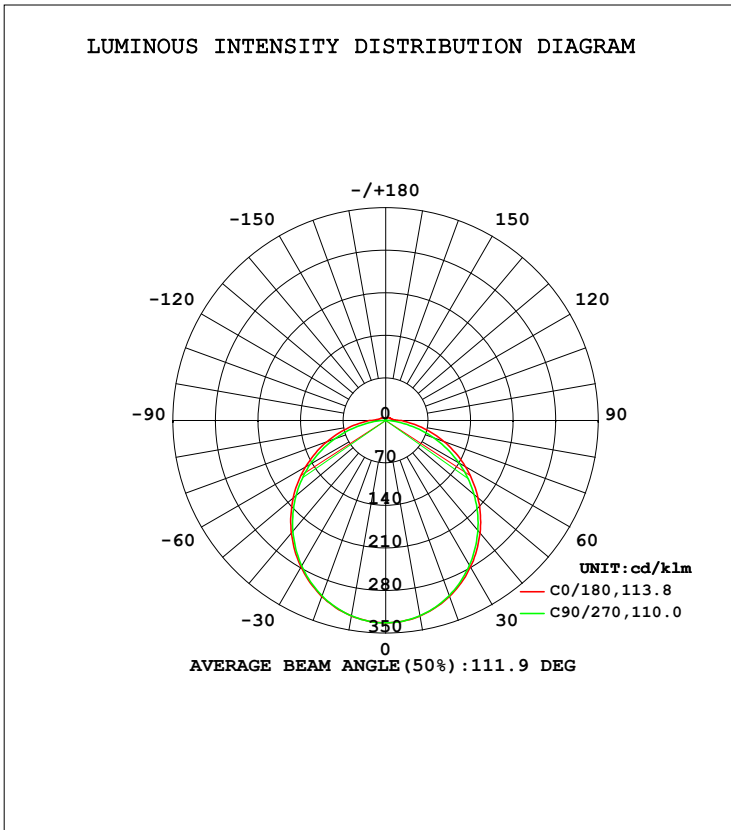

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.0DEG
 Test Date: 2020-8-13

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.429
 Humidity: 65.0%
 Test Distance: 7.000m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	326.6	326.6	326.1	326.3	326.7	326.6	326.3	326.6	0- 10	31.48	31.48	3.15,3.15
20	308.0	307.3	306.4	307.3	308.1	307.6	306.8	307.7	10- 20	89.84	121.3	12.1,12.1
30	278.9	277.6	275.5	277.3	278.9	278.1	276.7	278.3	20- 30	135.3	256.7	25.7,25.7
40	241.8	239.0	236.1	238.9	241.7	240.2	237.7	240.4	30- 40	162.3	419.0	41.9,41.9
50	198.5	194.5	189.9	194.4	198.8	196.4	192.7	196.5	40- 50	168.2	587.2	58.7,58.7
60	151.3	145.3	138.8	145.6	152.0	148.5	142.8	148.3	50- 60	153.3	740.4	74,74
70	102.4	93.76	84.20	94.37	103.5	97.98	89.71	97.40	60- 70	120.0	860.4	86,86
80	55.92	44.71	30.59	45.55	57.50	49.27	36.87	48.48	70- 80	74.15	934.5	93.5,93.5
90	23.80	13.82	0.4962	14.20	24.58	15.88	1.544	15.49	80- 90	30.04	964.6	96.5,96.5
100	11.87	7.055	0.7513	7.545	12.90	7.865	0.7127	7.619	90-100	10.19	974.8	97.5,97.5
110	9.678	5.952	1.150	6.315	9.793	6.449	1.081	6.494	100-110	6.819	981.6	98.2,98.2
120	8.398	5.799	1.542	5.681	8.334	5.759	1.488	5.970	110-120	5.549	987.1	98.7,98.7
130	7.614	5.134	1.964	4.985	7.195	5.006	1.879	5.139	120-130	4.539	991.7	99.2,99.2
140	6.383	3.323	2.379	3.654	5.986	4.106	2.302	4.209	130-140	3.412	995.1	99.5,99.5
150	4.087	3.025	2.731	2.817	4.504	2.774	2.678	3.864	140-150	2.284	997.4	99.7,99.7
160	3.037	2.978	2.990	2.981	2.912	2.892	2.912	2.903	150-160	1.470	998.8	99.9,99.9
170	3.139	3.142	3.123	3.122	3.084	3.127	3.124	3.122	160-170	0.8618	999.7	100,100
180	3.155	3.150	3.155	3.153	3.139	3.135	3.147	3.161	170-180	0.2998	1000	100,100
DEG	LUMINOUS INTENSITY:cd/klm									UNIT:lm/klm		

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.0DEG
 Test Date:2020-8-13

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.429
 Humidity:65.0%
 Test Distance:7.000m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:23.999V I:0.1932A P:4.6366W PF:1.0000 Freq:0Hz Lamp Flux:446.247x1 lm		
NAME: CLK-01-40K	TYPE: LED Strip	WEIGHT: Kg
SPEC.: 4.3W	DIM.: 350*10*10 (MM)	SERIAL No.: 001
MFR.: Flexfire LEDs, Inc.	SUR.: 340*10 (MM)	Shielding Angle: 120

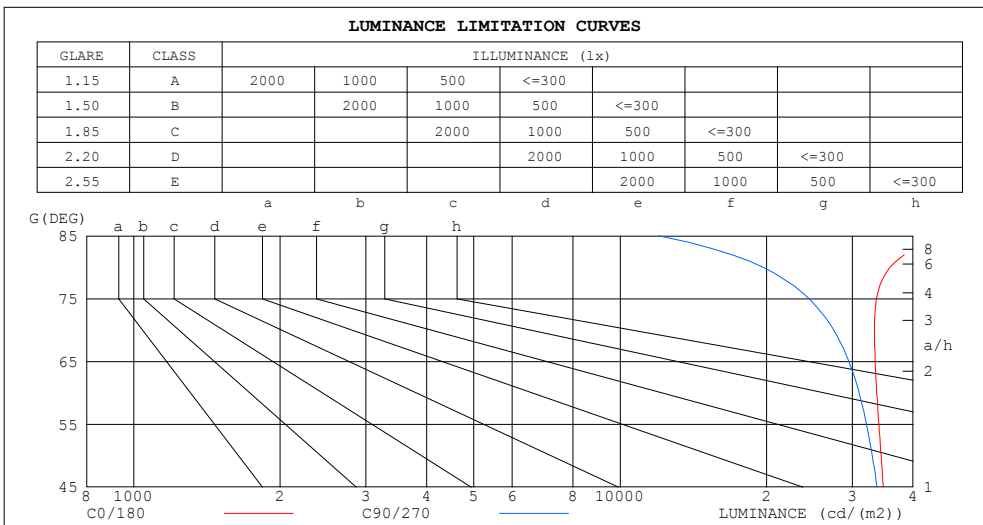


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.0DEG
 Test Date:2020-8-13

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.429
 Humidity:65.0%
 Test Distance:7.000m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:23.999V I:0.1932A P:4.6366W PF:1.0000 Freq:0Hz Lamp Flux:446.247x1 lm		
NAME: CLK-01-40K	TYPE: LED Strip	WEIGHT: Kg
SPEC.: 4.3W	DIM.: 350*10*10(MM)	SERIAL No.: 001
MFR.: Flexfire LEDs, Inc.	SUR.: 340*10(MM)	Shielding Angle: 120

ρcc	80%			70%			50%			30%			10%			0
	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρw	0															
ρfc	0															
RCR	RCR:Room Cavity Ratio Coefficients of Utilization(CU)															
0.0	1.18	1.18	1.18	1.15	1.15	1.15	1.09	1.09	1.09	1.04	1.04	1.04	.99	.99	.99	.96
1.0	1.02	.98	.94	.00	.96	.92	.95	.91	.88	.90	.87	.85	.86	.84	.82	.79
2.0	.89	.82	.76	.87	.80	.75	.82	.77	.72	.79	.74	.70	.75	.71	.68	.66
3.0	.78	.69	.63	.76	.68	.62	.72	.66	.60	.69	.64	.59	.66	.62	.58	.55
4.0	.69	.60	.53	.67	.59	.53	.64	.57	.51	.62	.55	.50	.59	.54	.49	.47
5.0	.61	.52	.46	.60	.52	.45	.58	.50	.44	.55	.49	.44	.53	.47	.43	.41
6.0	.55	.46	.40	.54	.46	.39	.52	.44	.39	.50	.43	.38	.48	.42	.38	.35
7.0	.50	.41	.35	.49	.41	.35	.47	.40	.34	.45	.39	.34	.44	.38	.33	.31
8.0	.46	.37	.31	.45	.37	.31	.43	.36	.31	.42	.35	.30	.40	.34	.30	.28
9.0	.42	.34	.28	.41	.33	.28	.40	.33	.28	.38	.32	.27	.37	.31	.27	.25
10.0	.39	.31	.25	.38	.30	.25	.37	.30	.25	.36	.29	.25	.34	.29	.24	.23

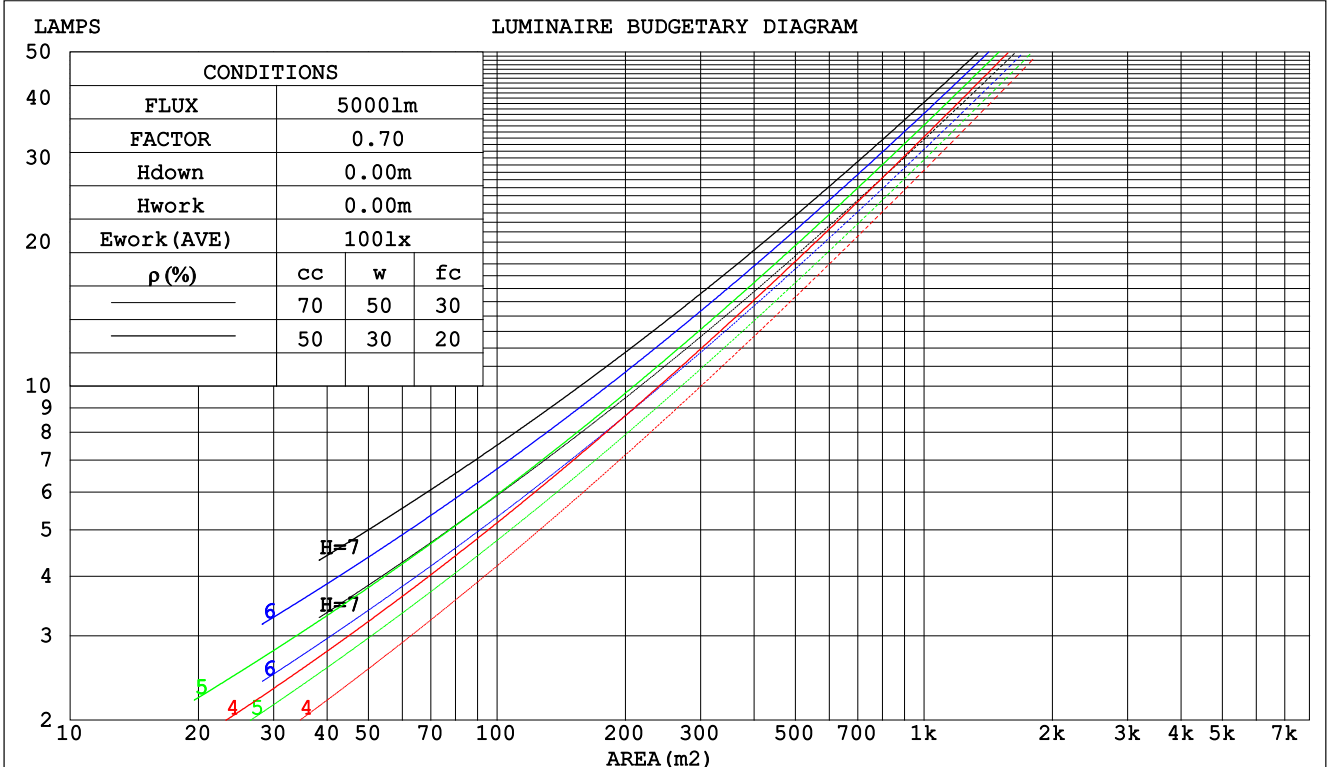

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.0DEG
 Test Date:2020-8-13

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.429
 Humidity:65.0%
 Test Distance:7.000m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:23.999V I:0.1932A P:4.6366W PF:1.0000 Freq:0Hz Lamp Flux:446.247x1 lm		
NAME: CLK-01-40K	TYPE: LED Strip	WEIGHT: Kg
SPEC.: 4.3W	DIM.: 350*10*10(MM)	SERIAL No.: 001
MFR.: Flexfire LEDs, Inc.	SUR.: 340*10(MM)	Shielding Angle: 120

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.324	.184	.058	.315	.180	.057	.300	.172	.055	.286	.165	.053	.273	.158	.051	
2.0	.299	.164	.050	.292	.161	.049	.278	.155	.048	.265	.149	.047	.254	.144	.045	
3.0	.274	.146	.044	.268	.143	.043	.256	.139	.042	.244	.134	.041	.234	.130	.040	
4.0	.252	.131	.038	.246	.129	.038	.235	.125	.037	.225	.121	.036	.216	.117	.036	
5.0	.232	.118	.034	.227	.116	.034	.217	.113	.033	.208	.110	.033	.200	.107	.032	
6.0	.215	.108	.031	.210	.106	.031	.201	.103	.030	.193	.100	.030	.186	.098	.029	
7.0	.199	.099	.028	.195	.097	.028	.187	.095	.027	.180	.092	.027	.173	.090	.026	
8.0	.186	.091	.026	.182	.090	.025	.175	.088	.025	.169	.085	.025	.162	.083	.024	
9.0	.174	.084	.024	.171	.083	.023	.164	.081	.023	.158	.079	.023	.153	.078	.022	
10.0	.164	.078	.022	.161	.078	.022	.155	.076	.021	.149	.074	.021	.144	.072	.021	

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.217	.217	.217	.186	.186	.186	.127	.127	.127	.073	.073	.073	.023	.023	.023	
1.0	.208	.183	.160	.178	.157	.138	.122	.108	.096	.070	.063	.056	.022	.020	.018	
2.0	.201	.159	.125	.172	.137	.108	.118	.095	.075	.068	.055	.044	.022	.018	.014	
3.0	.193	.142	.101	.165	.122	.088	.113	.085	.062	.066	.050	.036	.021	.016	.012	
4.0	.185	.129	.086	.159	.111	.074	.109	.078	.052	.063	.045	.031	.020	.015	.010	
5.0	.178	.118	.075	.153	.102	.065	.105	.072	.046	.061	.042	.027	.020	.014	.009	
6.0	.170	.110	.067	.146	.095	.058	.101	.067	.041	.059	.039	.024	.019	.013	.008	
7.0	.164	.103	.061	.141	.090	.053	.097	.063	.038	.056	.037	.022	.018	.012	.007	
8.0	.157	.098	.057	.135	.085	.049	.094	.059	.035	.054	.035	.021	.018	.011	.007	
9.0	.151	.093	.053	.130	.080	.046	.090	.056	.033	.052	.033	.020	.017	.011	.007	
10.0	.145	.088	.050	.125	.077	.044	.087	.054	.031	.051	.032	.019	.016	.010	.006	

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.0DEG
 Test Date:2020-8-13

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.429
 Humidity:65.0%
 Test Distance:7.000m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:23.999V I:0.1932A P:4.6366W PF:1.0000 Freq:0Hz Lamp Flux:446.247x1 lm										
NAME: CLK-01-40K					TYPE: LED Strip			WEIGHT: Kg		
SPEC.: 4.3W					DIM.: 350*10*10(MM)			SERIAL No.: 001		
MFR.: Flexfire LEDs, Inc.					SUR.: 340*10(MM)			Shielding Angle: 120		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	27.0	28.6	27.4	29.0	29.4	26.6	28.2	27.1	28.6	29.0
3H	29.0	30.5	29.5	30.9	31.3	28.4	29.8	28.8	30.2	30.7
4H	29.9	31.2	30.3	31.7	32.1	29.0	30.3	29.4	30.8	31.2
6H	30.7	31.9	31.1	32.4	32.8	29.4	30.6	29.8	31.1	31.5
8H	31.0	32.2	31.5	32.7	33.2	29.5	30.7	29.9	31.1	31.6
12H	31.4	32.5	31.9	33.0	33.5	29.5	30.7	30.0	31.1	31.6
4H 2H	27.6	29.0	28.1	29.4	29.8	27.3	28.7	27.8	29.1	29.6
3H	29.9	31.0	30.3	31.5	32.0	29.3	30.4	29.8	30.9	31.4
4H	30.9	31.9	31.4	32.4	32.9	30.1	31.1	30.5	31.6	32.1
6H	31.8	32.7	32.3	33.2	33.8	30.6	31.5	31.1	32.0	32.5
8H	32.3	33.1	32.8	33.6	34.2	30.7	31.5	31.2	32.1	32.6
12H	32.7	33.5	33.3	34.0	34.6	30.8	31.5	31.3	32.1	32.6
8H 4H	31.2	32.0	31.7	32.6	33.1	30.5	31.3	31.0	31.8	32.4
6H	32.3	33.0	32.9	33.6	34.1	31.1	31.8	31.7	32.4	32.9
8H	32.9	33.5	33.4	34.1	34.6	31.3	32.0	31.9	32.5	33.1
12H	33.5	34.1	34.0	34.6	35.2	31.5	32.0	32.0	32.6	33.2
12H 4H	31.2	32.0	31.8	32.5	33.1	30.6	31.3	31.1	31.9	32.4
6H	32.4	33.0	32.9	33.5	34.2	31.3	31.9	31.8	32.4	33.1
8H	33.0	33.6	33.6	34.1	34.8	31.5	32.1	32.1	32.7	33.3
CIE190: 2010										

CIE190: 2010
Area: 0.004 m2

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.0DEG
Test Date:2020-8-13

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.429
Humidity:65.0%
Test Distance:7.000m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:23.999V I:0.1932A P:4.6366W PF:1.0000 Freq:0Hz Lamp Flux:446.247x1 lm		
NAME: CLK-01-40K	TYPE: LED Strip	WEIGHT: Kg
SPEC.: 4.3W	DIM.: 350*10*10(MM)	SERIAL No.: 001
MFR.: Flexfire LEDs, Inc.	SUR.: 340*10(MM)	Shielding Angle: 120


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	56	44	37	55	44	37	54	43	37	30
0.80	66	54	46	65	53	46	63	52	46	39
1.00	74	63	55	73	62	55	70	63	54	47
1.25	81	70	63	79	69	62	76	68	61	54
1.50	86	76	68	84	75	68	81	73	67	58
2.00	93	84	77	91	83	76	87	80	74	66
2.50	97	89	82	95	87	81	90	84	79	70
3.00	100	93	87	98	91	86	93	88	83	74
4.00	104	98	93	102	96	92	97	92	89	79
5.00	107	102	97	104	100	96	99	95	92	82
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.0DEG
 Test Date:2020-8-13

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.429
 Humidity:65.0%
 Test Distance:7.000m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:23.999V I:0.1932A P:4.6366W PF:1.0000 Freq:0Hz Lamp Flux:446.247x1 lm		
NAME: CLK-01-40K	TYPE: LED Strip	WEIGHT: Kg
SPEC.: 4.3W	DIM.: 350*10*10 (MM)	SERIAL No.: 001
MFR.: Flexfire LEDs, Inc.	SUR.: 340*10 (MM)	Shielding Angle: 120

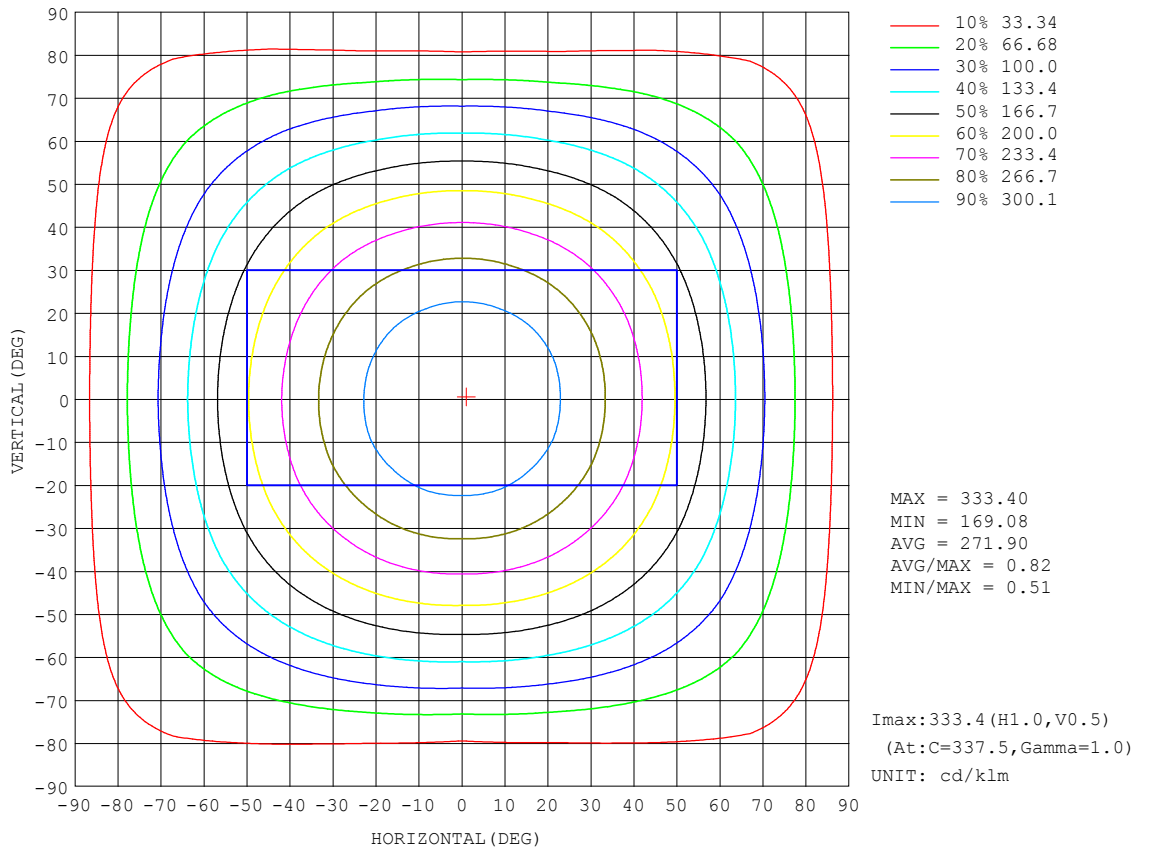


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.0DEG
 Test Date:2020-8-13

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.429
 Humidity:65.0%
 Test Distance:7.000m [K=1.0000]
 Remarks:

AAI Figure

Test:U:23.999V I:0.1932A P:4.6366W PF:1.0000 Freq:0Hz Lamp Flux:446.247x1 lm		
NAME: CLK-01-40K	TYPE: LED Strip	WEIGHT: Kg
SPEC.: 4.3W	DIM.: 350*10*10(MM)	SERIAL No.: 001
MFR.: Flexfire LEDs, Inc.	SUR.: 340*10(MM)	Shielding Angle: 120

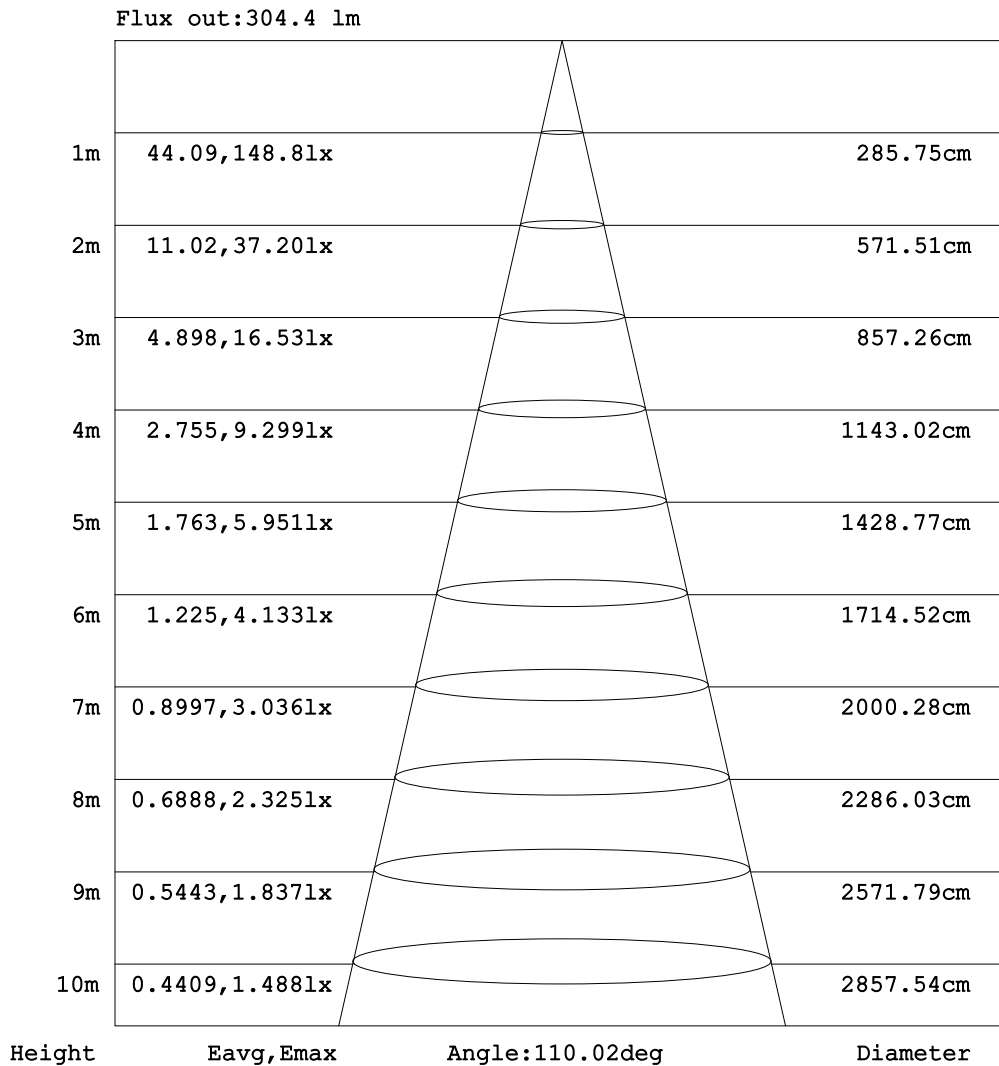


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.0DEG
 Test Date:2020-8-13

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.429
 Humidity:65.0%
 Test Distance:7.000m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:23.999V I:0.1932A P:4.6366W PF:1.0000 Freq:0Hz Lamp Flux:446.247x1 lm		
NAME: CLK-01-40K	TYPE: LED Strip	WEIGHT: Kg
SPEC.: 4.3W	DIM.: 350*10*10 (MM)	SERIAL No.: 001
MFR.: Flexfire LEDs, Inc.	SUR.: 340*10 (MM)	Shielding Angle: 120

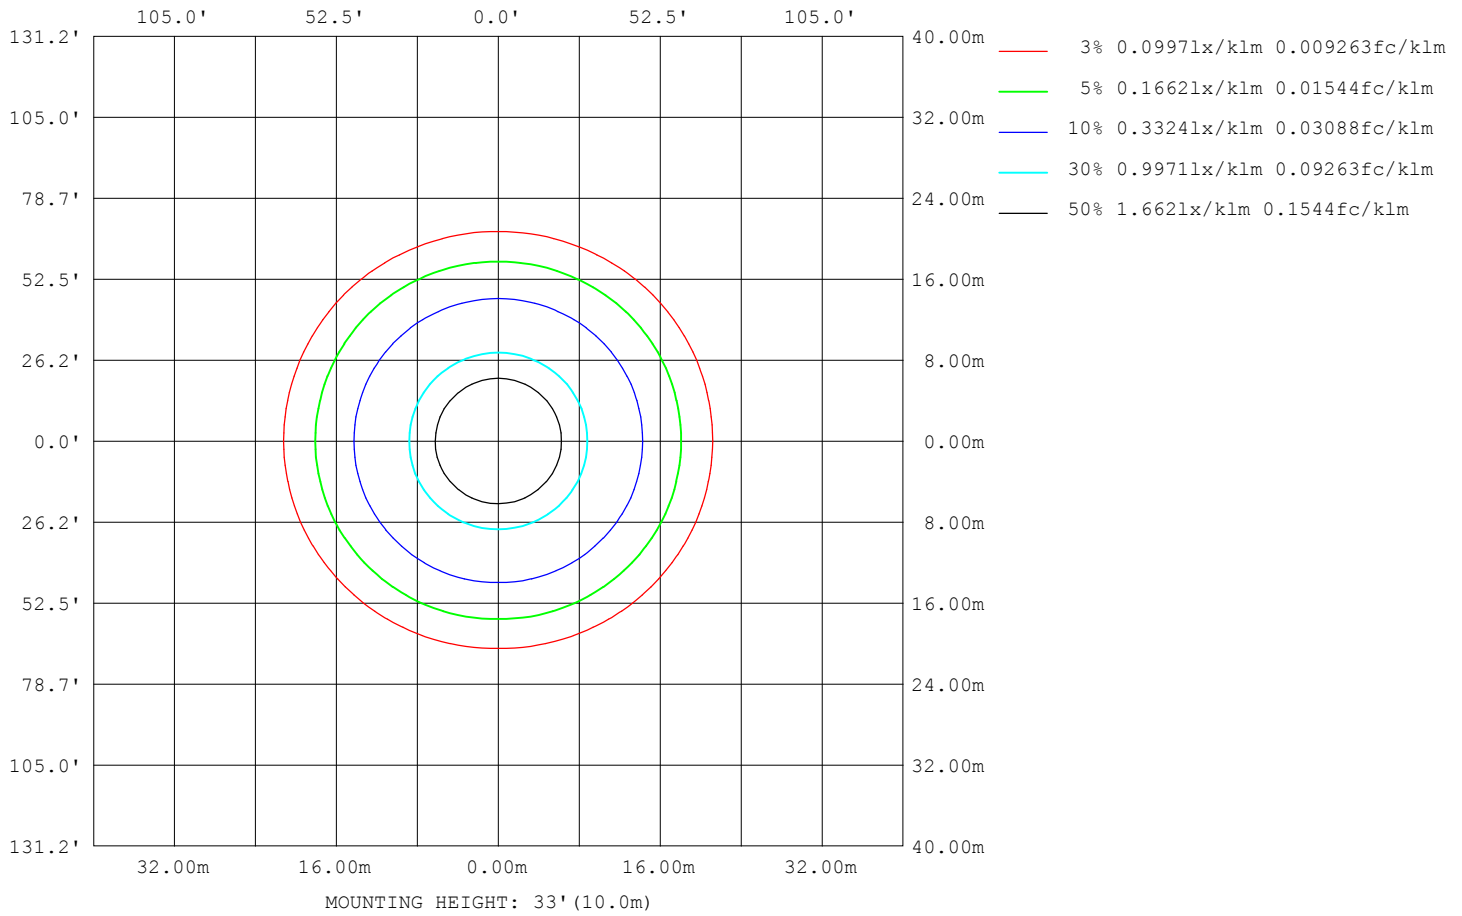

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.0DEG
 Test Date:2020-8-13

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.429
 Humidity:65.0%
 Test Distance:7.000m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:23.999V I:0.1932A P:4.6366W PF:1.0000 Freq:0Hz Lamp Flux:446.247x1 lm		
NAME: CLK-01-40K	TYPE: LED Strip	WEIGHT: Kg
SPEC.: 4.3W	DIM.: 350*10*10(MM)	SERIAL No.: 001
MFR.: Flexfire LEDs, Inc.	SUR.: 340*10(MM)	Shielding Angle: 120


AvgL	cd/m2
L_0~180 (65) av	33602
L_0~180 (75) av	34056
L_0~180 (85) av	48432
L_90~270 (65) av	30140
L_90~270 (75) av	25746
L_90~270 (85) av	15480
L_45 (65) av	32090
L_45 (75) av	30422
L_45 (85) av	35199

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.0DEG
 Test Date:2020-8-13

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.429
 Humidity:65.0%
 Test Distance:7.000m [K=1.0000]
 Remarks:

Planar Illuminance Curve

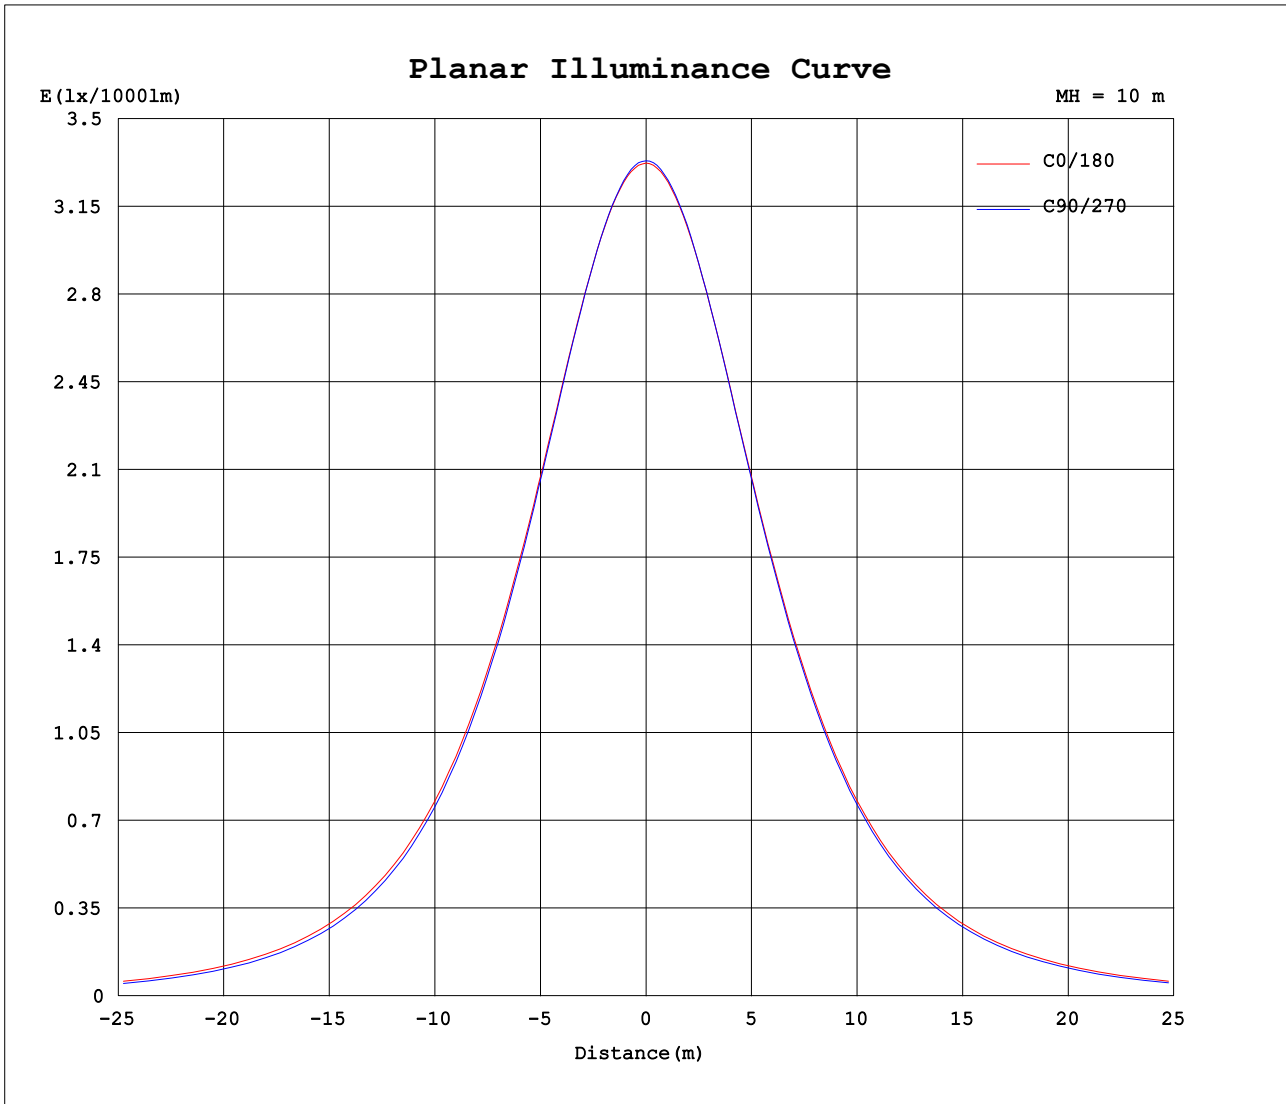

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.0DEG
 Test Date:2020-8-13

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.429
 Humidity:65.0%
 Test Distance:7.000m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:23.999V I:0.1932A P:4.6366W PF:1.0000 Freq:0Hz Lamp Flux:446.247x1 lm		
NAME: CLK-01-40K	TYPE: LED Strip	WEIGHT: Kg
SPEC.: 4.3W	DIM.: 350*10*10(MM)	SERIAL No.: 001
MFR.: Flexfire LEDs, Inc.	SUR.: 340*10(MM)	Shielding Angle: 120

Table--1

UNIT: cd/klm

C (DEG) \ γ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	333	333	333	333	333	333	333	333	333	333	333	333	333	333	333	333			
5	332	332	331	331	331	331	331	332	331	331	332	331	331	331	332	332			
10	327	327	327	327	326	326	326	327	327	326	327	326	326	326	327	327			
15	319	319	318	318	318	318	318	319	319	319	318	318	318	318	319	319			
20	308	308	307	307	306	307	307	308	308	308	308	307	307	307	308	308			
25	295	295	294	293	292	293	293	295	295	294	294	293	293	293	294	295			
30	279	279	278	277	276	277	277	279	279	278	278	277	277	277	278	279			
35	261	261	259	258	257	258	259	261	261	261	260	258	258	258	260	261			
40	242	241	239	238	236	237	239	241	242	241	240	238	238	238	240	241			
45	221	220	217	216	214	216	217	220	221	220	219	216	216	216	219	220			
50	198	198	194	192	190	192	194	198	199	198	196	194	193	193	196	198			
55	175	175	170	167	165	168	170	174	176	175	173	169	168	169	173	175			
60	151	150	145	142	139	142	146	150	152	151	148	145	143	144	148	151			
65	127	125	120	115	112	115	120	125	128	127	123	119	117	118	123	126			
70	102	100	93.8	88.0	84.2	88.5	94.4	101	103	102	98.0	92.2	89.7	91.7	97.4	101			
75	78.2	75.7	68.3	61.4	56.7	61.7	69.0	76.4	79.8	77.7	72.9	65.8	62.8	65.2	72.2	77.0			
80	55.9	53.1	44.7	36.2	30.6	36.7	45.5	54.0	57.5	55.1	49.3	40.8	36.9	40.1	48.5	54.2			
85	37.2	34.1	25.7	15.9	9.38	16.5	26.4	34.9	38.5	35.9	29.3	19.6	14.8	19.2	28.6	35.1			
90	23.8	21.1	13.8	5.14	0.50	5.87	14.2	21.5	24.6	22.2	15.9	7.17	1.54	7.07	15.5	21.7			
95	14.9	12.5	8.09	3.19	0.57	3.72	9.27	14.5	16.7	14.8	9.95	4.22	0.56	3.89	9.01	14.5			
100	11.9	10.4	7.05	2.77	0.75	3.36	7.55	11.3	12.9	11.4	7.87	3.71	0.71	3.84	7.62	10.5			
105	10.5	9.26	6.65	3.14	0.97	3.26	6.75	9.74	11.0	9.84	6.94	3.51	0.89	3.81	6.12	9.46			
110	9.68	8.69	5.95	3.36	1.15	3.22	6.31	8.80	9.79	8.86	6.45	3.32	1.08	3.66	6.49	8.35			
115	8.05	7.32	5.90	3.23	1.38	3.09	5.98	8.14	8.98	8.17	6.10	3.13	1.28	3.45	6.36	8.15			
120	8.40	7.54	5.80	2.87	1.54	2.23	5.68	7.61	8.33	7.62	5.76	2.73	1.49	3.26	5.97	7.88			
125	7.94	7.33	5.67	2.63	1.78	2.05	5.38	7.11	7.76	7.11	5.41	2.69	1.68	3.22	5.70	7.40			
130	7.61	7.02	5.13	2.49	1.96	2.14	4.99	6.64	7.20	6.61	5.01	2.64	1.88	3.21	5.14	7.02			
135	7.17	6.63	3.90	2.51	2.13	2.19	3.99	6.11	6.63	6.10	4.42	2.08	2.09	3.19	4.47	6.60			
140	6.38	5.36	3.32	2.41	2.38	2.36	3.65	5.35	5.99	5.41	4.11	2.26	2.30	3.23	4.21	5.81			
145	4.32	3.70	3.13	2.59	2.56	2.57	3.61	4.54	5.15	4.79	3.71	2.51	2.52	2.76	4.00	4.73			
150	4.09	3.40	3.02	2.76	2.73	2.75	2.82	4.15	4.50	4.23	2.77	2.64	2.68	2.63	3.86	4.24			
155	4.11	3.06	2.92	2.88	2.86	2.88	2.86	3.11	4.01	2.89	2.77	2.76	2.79	2.74	3.68	3.95			
160	3.04	2.96	2.98	2.99	2.99	2.98	2.98	2.97	2.91	2.79	2.89	2.89	2.91	2.87	2.90	3.78			
165	3.03	3.03	3.08	3.09	3.06	3.08	3.05	3.09	2.97	2.91	3.02	3.00	3.04	3.00	3.02	3.01			
170	3.14	3.09	3.14	3.16	3.12	3.15	3.12	3.17	3.08	3.03	3.13	3.09	3.12	3.11	3.12	3.12			
175	3.15	3.12	3.18	3.19	3.17	3.16	3.17	3.15	3.13	3.09	3.16	3.16	3.15	3.15	3.15	3.15			
180	3.15	3.09	3.15	3.15	3.15	3.14	3.15	3.14	3.14	3.09	3.13	3.14	3.15	3.15	3.16	3.15			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.0DEG
 Test Date:2020-8-13

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.429
 Humidity:65.0%
 Test Distance:7.000m [K=1.0000]
 Remarks: