
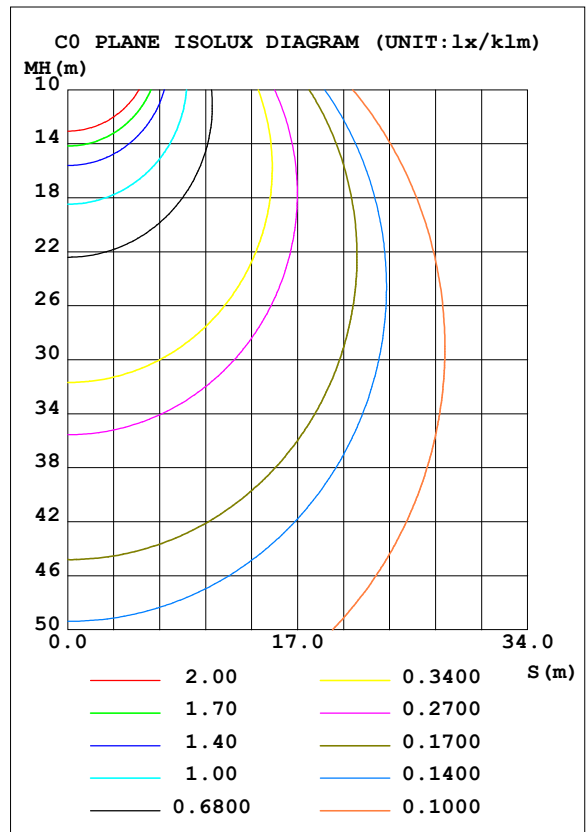


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:23.999V I:0.1987A P:4.7686W PF:1.0000 Freq:0Hz Lamp Flux:492.727x1 lm		
NAME: CLK-01-50K	TYPE: LED Strip	WEIGHT: Kg
SPEC.: 4.3W	DIM.: 350*10*10 (MM)	SERIAL No.: 001
MFR.: Flexfire LEDs, Inc.	SUR.: 340*10 (MM)	Shielding Angle: 120

DATA OF LAMP		PHOTOMETRIC DATA Eff: 103.33 lm/W			
MODEL	SMD /LED	I _{max} (cd/klm)	342.3	S/MH (C0/180)	1.23
NOMINAL POWER (W)	4.768	LOR (%)	100.0	S/MH (C90/270)	1.23
RATED VOLTAGE (V)	24	TOTAL FLUX (lm/klm)	1000.00	η UP, DN (C0-180)	1.9, 47.8
NOMINAL FLUX (lm)	492.727	CIE CLASS	DIRECT	η UP, DN (C180-360)	1.9, 48.4
LAMPS INSIDE	1	η up (%)	3.8	CIBSE SHR NOM	1.25
TEST VOLTAGE (V)	24	η down (%)	96.2	CIBSE SHR MAX	1.35

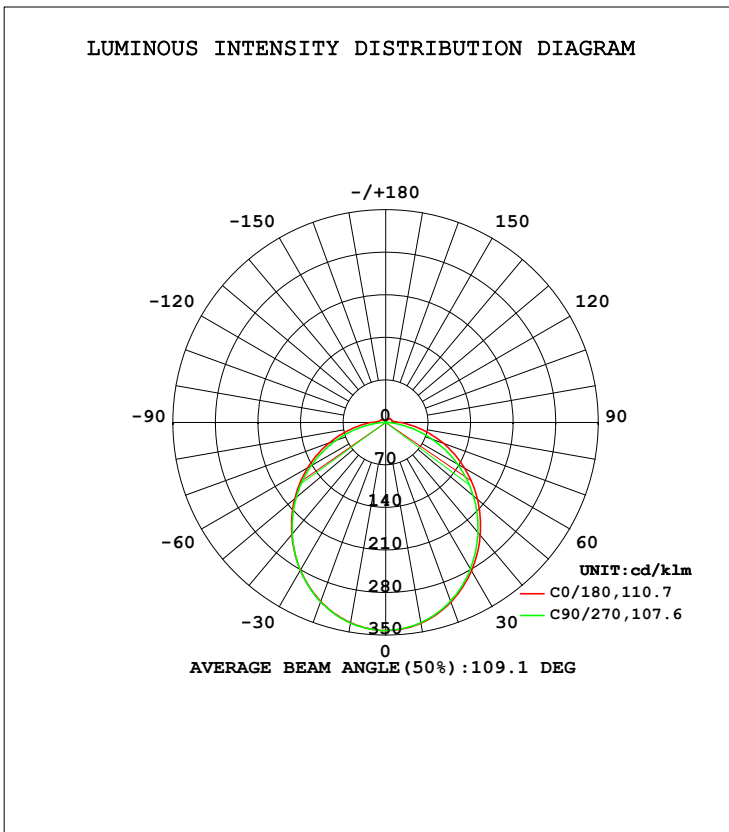

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.0DEG
 Test Date: 2020-8-13

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.429
 Humidity: 65.0%
 Test Distance: 7.000m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	335.3	335.0	334.2	334.2	334.5	334.7	335.1	335.4	0- 10	32.31	32.31	3.23,3.23
20	314.5	313.6	312.4	312.3	313.3	313.5	314.0	314.8	10- 20	91.87	124.2	12.4,12.4
30	282.1	280.6	278.7	279.0	281.0	281.0	281.1	282.6	20- 30	137.4	261.6	26.2,26.2
40	242.2	239.6	236.5	237.6	240.6	240.1	239.5	241.8	30- 40	163.3	424.9	42.5,42.5
50	197.3	193.1	188.2	191.0	195.5	194.1	192.2	195.8	40- 50	167.5	592.3	59.2,59.2
60	149.8	143.7	136.2	141.3	147.9	145.1	141.3	147.0	50- 60	151.1	743.5	74.3,74.3
70	101.4	92.77	81.83	90.23	99.11	94.62	88.10	96.65	60- 70	117.4	860.9	86.1,86.1
80	55.94	44.63	29.35	42.30	53.99	46.46	35.77	48.38	70- 80	72.03	932.9	93.3,93.3
90	23.92	13.81	0.4702	12.89	22.83	14.72	1.539	15.41	80- 90	28.93	961.8	96.2,96.2
100	12.05	7.509	0.7933	7.519	12.28	7.792	0.6807	8.084	90-100	10.08	971.9	97.2,97.2
110	11.06	7.467	1.148	6.668	10.18	6.813	1.049	7.751	100-110	7.245	979.2	97.9,97.9
120	10.32	7.374	1.566	6.052	8.842	6.046	1.460	6.943	110-120	6.317	985.5	98.5,98.5
130	9.577	6.993	1.949	5.308	7.590	5.215	1.879	6.173	120-130	5.199	990.7	99.1,99.1
140	8.483	4.969	2.381	3.936	6.252	3.611	2.290	4.760	130-140	3.914	994.6	99.5,99.5
150	5.834	4.493	2.771	3.352	3.544	3.187	2.673	4.300	140-150	2.553	997.1	99.7,99.7
160	4.207	3.074	3.026	3.039	3.214	2.925	2.942	3.946	150-160	1.643	998.8	99.9,99.9
170	3.180	3.187	3.189	3.181	3.159	3.166	3.175	3.168	160-170	0.9091	999.7	100,100
180	3.209	3.215	3.211	3.203	3.194	3.208	3.211	3.203	170-180	0.3061	1000.0	100,100
DEG	LUMINOUS INTENSITY:cd/klm									UNIT:lm/klm		

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.0DEG
 Test Date:2020-8-13

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.429
 Humidity:65.0%
 Test Distance:7.000m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:23.999V I:0.1987A P:4.7686W PF:1.0000 Freq:0Hz Lamp Flux:492.727x1 lm		
NAME: CLK-01-50K	TYPE: LED Strip	WEIGHT: Kg
SPEC.: 4.3W	DIM.: 350*10*10 (MM)	SERIAL No.: 001
MFR.: Flexfire LEDs, Inc.	SUR.: 340*10 (MM)	Shielding Angle: 120

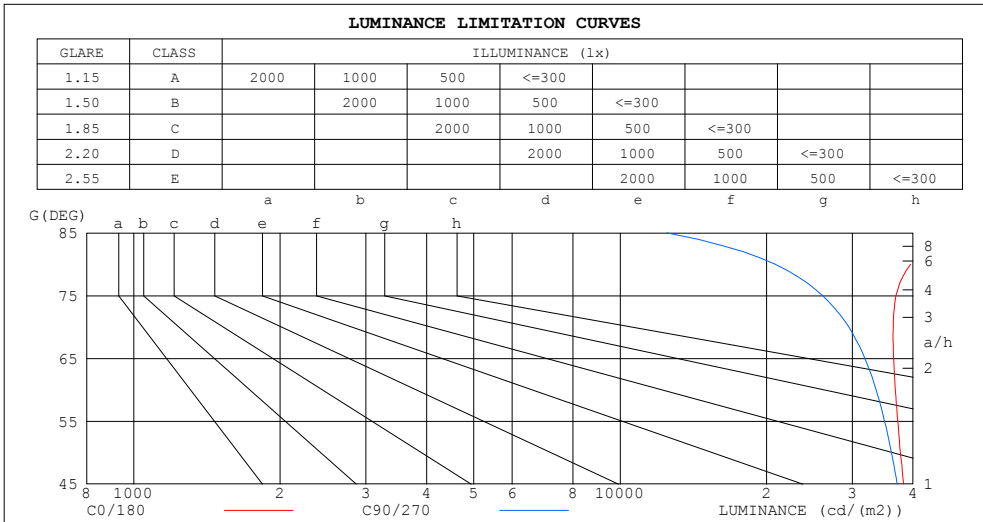

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	52825	12462
80	39569	20835
75	36911	26081
70	36417	29499
65	36484	31850
60	36788	33580
55	37213	34949
50	37700	36101
45	38251	37121


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.0DEG
 Test Date:2020-8-13

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.429
 Humidity:65.0%
 Test Distance:7.000m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:23.999V I:0.1987A P:4.7686W PF:1.0000 Freq:0Hz Lamp Flux:492.727x1 lm		
NAME: CLK-01-50K	TYPE: LED Strip	WEIGHT: Kg
SPEC.: 4.3W	DIM.: 350*10*10(MM)	SERIAL No.: 001
MFR.: Flexfire LEDs, Inc.	SUR.: 340*10(MM)	Shielding Angle: 120

ρcc	80%			70%			50%			30%			10%			0
	ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															
	Coefficients of Utilization(CU)															
0.0	1.18	1.18	1.18	1.15	1.15	1.15	1.09	1.09	1.09	1.04	1.04	1.04	.99	.99	.99	.96
1.0	1.02	.98	.94	.90	.96	.92	.95	.91	.88	.90	.88	.85	.86	.84	.82	.79
2.0	.89	.82	.76	.87	.80	.75	.83	.77	.73	.79	.74	.70	.75	.72	.68	.66
3.0	.78	.70	.63	.76	.69	.62	.73	.66	.61	.69	.64	.59	.66	.62	.58	.55
4.0	.69	.60	.54	.68	.59	.53	.65	.57	.52	.62	.56	.51	.59	.54	.50	.47
5.0	.62	.53	.46	.60	.52	.46	.58	.50	.45	.55	.49	.44	.53	.48	.43	.41
6.0	.56	.47	.40	.54	.46	.40	.52	.45	.39	.50	.44	.39	.48	.42	.38	.36
7.0	.50	.42	.35	.49	.41	.35	.48	.40	.35	.46	.39	.34	.44	.38	.34	.32
8.0	.46	.37	.32	.45	.37	.31	.43	.36	.31	.42	.35	.31	.40	.35	.30	.28
9.0	.42	.34	.28	.41	.34	.28	.40	.33	.28	.39	.32	.28	.37	.32	.27	.25
10.0	.39	.31	.26	.38	.31	.26	.37	.30	.25	.36	.30	.25	.35	.29	.25	.23

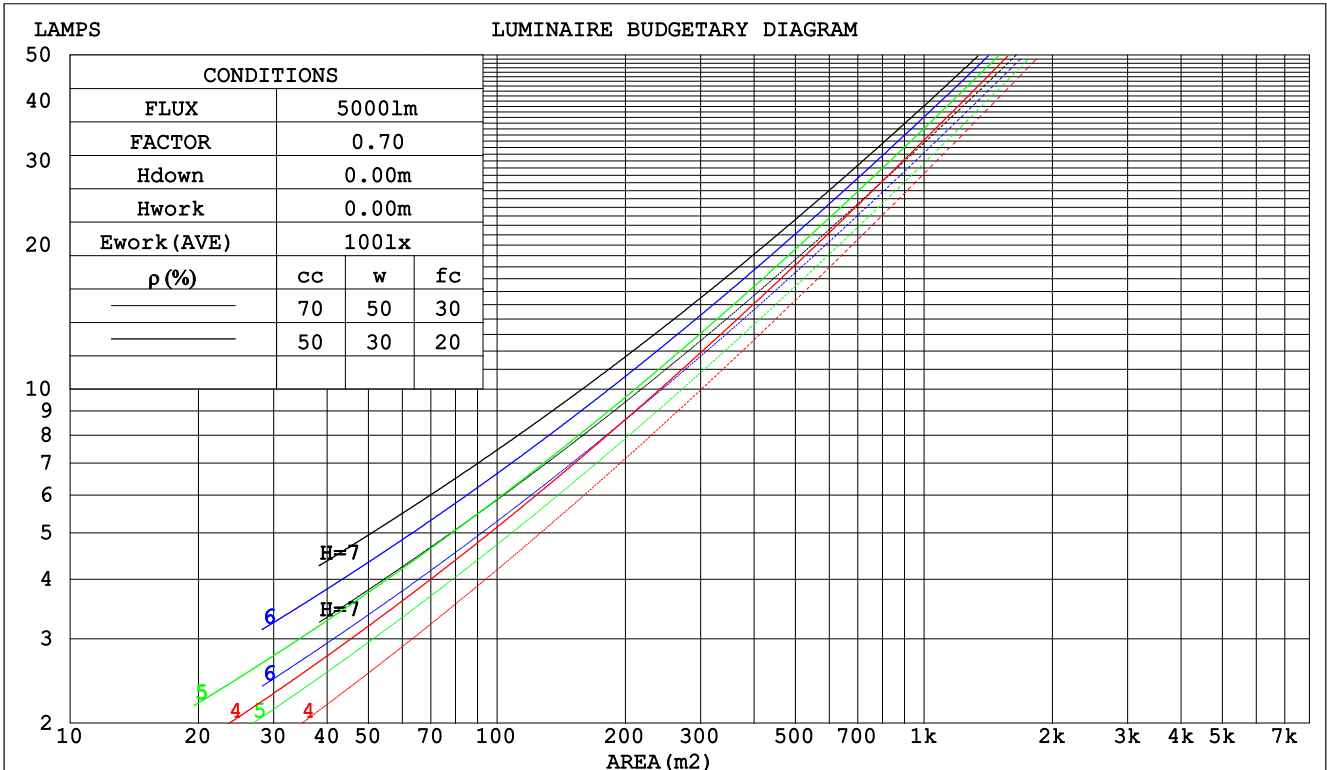

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.0DEG
 Test Date:2020-8-13

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.429
 Humidity:65.0%
 Test Distance:7.000m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:23.999V I:0.1987A P:4.7686W PF:1.0000 Freq:0Hz Lamp Flux:492.727x1 lm								
NAME: CLK-01-50K			TYPE: LED Strip			WEIGHT: Kg		
SPEC.: 4.3W			DIM.: 350*10*10(MM)			SERIAL No.: 001		
MFR.: Flexfire LEDs, Inc.			SUR.: 340*10(MM)			Shielding Angle: 120		

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.320	.182	.058	.312	.178	.057	.297	.170	.054	.282	.163	.052	.269	.156	.050	
2.0	.296	.162	.050	.289	.159	.049	.275	.153	.048	.262	.147	.046	.251	.142	.045	
3.0	.272	.145	.043	.266	.142	.043	.253	.137	.042	.242	.133	.041	.231	.128	.040	
4.0	.250	.130	.038	.244	.128	.038	.233	.124	.037	.223	.120	.036	.214	.116	.035	
5.0	.230	.117	.034	.225	.116	.034	.216	.112	.033	.206	.109	.032	.198	.106	.032	
6.0	.213	.107	.031	.209	.105	.030	.200	.102	.030	.192	.100	.029	.184	.097	.029	
7.0	.198	.098	.028	.194	.097	.028	.186	.094	.027	.179	.092	.027	.172	.089	.026	
8.0	.185	.090	.025	.181	.089	.025	.174	.087	.025	.167	.085	.024	.161	.083	.024	
9.0	.173	.084	.023	.170	.083	.023	.163	.081	.023	.157	.079	.023	.152	.077	.022	
10.0	.163	.078	.022	.160	.077	.022	.154	.075	.021	.148	.074	.021	.143	.072	.021	

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.220	.220	.220	.188	.188	.188	.128	.128	.128	.074	.074	.074	.024	.024	.024	
1.0	.210	.185	.163	.180	.159	.140	.123	.109	.097	.071	.063	.056	.023	.020	.018	
2.0	.202	.161	.127	.173	.139	.110	.119	.096	.077	.068	.056	.045	.022	.018	.015	
3.0	.195	.144	.104	.167	.124	.090	.115	.086	.063	.066	.050	.037	.021	.016	.012	
4.0	.187	.131	.088	.160	.113	.076	.110	.079	.054	.064	.046	.032	.021	.015	.010	
5.0	.179	.121	.077	.154	.104	.067	.106	.073	.047	.061	.043	.028	.020	.014	.009	
6.0	.172	.112	.069	.148	.097	.060	.102	.068	.043	.059	.040	.025	.019	.013	.008	
7.0	.165	.105	.063	.142	.091	.055	.098	.064	.039	.057	.038	.023	.018	.012	.008	
8.0	.159	.100	.059	.137	.086	.051	.095	.061	.036	.055	.036	.022	.018	.012	.007	
9.0	.153	.095	.055	.132	.082	.048	.091	.058	.034	.053	.034	.020	.017	.011	.007	
10.0	.147	.090	.053	.127	.079	.046	.088	.055	.033	.051	.033	.020	.017	.011	.006	

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.0DEG
 Test Date:2020-8-13

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.429
 Humidity:65.0%
 Test Distance:7.000m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:23.999V I:0.1987A P:4.7686W PF:1.0000 Freq:0Hz Lamp Flux:492.727x1 lm										
NAME: CLK-01-50K					TYPE: LED Strip			WEIGHT: Kg		
SPEC.: 4.3W					DIM.: 350*10*10(MM)			SERIAL No.: 001		
MFR.: Flexfire LEDs, Inc.					SUR.: 340*10(MM)			Shielding Angle: 120		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	26.9	28.5	27.4	28.9	29.3	26.5	28.0	26.9	28.4	28.8
3H	29.0	30.4	29.4	30.8	31.2	28.2	29.6	28.6	30.0	30.5
4H	29.8	31.2	30.3	31.6	32.1	28.8	30.1	29.2	30.5	31.0
6H	30.6	31.8	31.1	32.3	32.8	29.2	30.4	29.6	30.8	31.3
8H	31.0	32.1	31.4	32.6	33.1	29.2	30.4	29.7	30.9	31.4
12H	31.3	32.5	31.8	32.9	33.4	29.3	30.4	29.8	30.9	31.4
4H 2H	27.5	28.9	28.0	29.3	29.8	27.1	28.5	27.6	28.9	29.4
3H	29.8	30.9	30.3	31.4	31.9	29.1	30.2	29.6	30.7	31.2
4H	30.8	31.8	31.3	32.3	32.9	29.8	30.8	30.3	31.3	31.8
6H	31.8	32.7	32.3	33.2	33.7	30.3	31.2	30.8	31.7	32.3
8H	32.2	33.1	32.7	33.6	34.1	30.4	31.3	30.9	31.8	32.3
12H	32.7	33.4	33.2	34.0	34.5	30.5	31.2	31.0	31.8	32.3
8H 4H	31.1	32.0	31.6	32.5	33.0	30.2	31.0	30.7	31.6	32.1
6H	32.3	33.0	32.8	33.5	34.1	30.8	31.5	31.4	32.1	32.7
8H	32.8	33.5	33.4	34.0	34.6	31.0	31.7	31.6	32.2	32.8
12H	33.5	34.0	34.0	34.6	35.2	31.2	31.7	31.7	32.3	32.9
12H 4H	31.2	31.9	31.7	32.4	33.0	30.3	31.0	30.8	31.6	32.1
6H	32.3	33.0	32.9	33.5	34.1	31.0	31.6	31.5	32.1	32.8
8H	33.0	33.5	33.5	34.1	34.7	31.2	31.8	31.8	32.3	33.0
CIE190: 2010										

CIE190: 2010
Area: 0.004 m2

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.0DEG
Test Date:2020-8-13

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.429
Humidity:65.0%
Test Distance:7.000m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:23.999V I:0.1987A P:4.7686W PF:1.0000 Freq:0Hz Lamp Flux:492.727x1 lm		
NAME: CLK-01-50K	TYPE: LED Strip	WEIGHT: Kg
SPEC.: 4.3W	DIM.: 350*10*10(MM)	SERIAL No.: 001
MFR.: Flexfire LEDs, Inc.	SUR.: 340*10(MM)	Shielding Angle: 120


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	56	45	38	55	44	37	54	44	37	31
0.80	66	54	47	65	54	47	63	53	46	39
1.00	74	63	55	73	62	55	70	63	54	47
1.25	81	71	63	80	70	63	77	68	62	54
1.50	86	76	69	84	75	68	81	73	67	59
2.00	93	84	77	91	83	77	87	80	75	66
2.50	97	89	83	95	87	82	90	84	79	70
3.00	100	93	87	98	91	86	93	88	84	74
4.00	105	99	94	102	96	92	97	93	89	79
5.00	107	102	98	104	100	96	99	95	92	82
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.0DEG
 Test Date:2020-8-13

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.429
 Humidity:65.0%
 Test Distance:7.000m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:23.999V I:0.1987A P:4.7686W PF:1.0000 Freq:0Hz Lamp Flux:492.727x1 lm		
NAME: CLK-01-50K	TYPE: LED Strip	WEIGHT: Kg
SPEC.: 4.3W	DIM.: 350*10*10 (MM)	SERIAL No.: 001
MFR.: Flexfire LEDs, Inc.	SUR.: 340*10 (MM)	Shielding Angle: 120

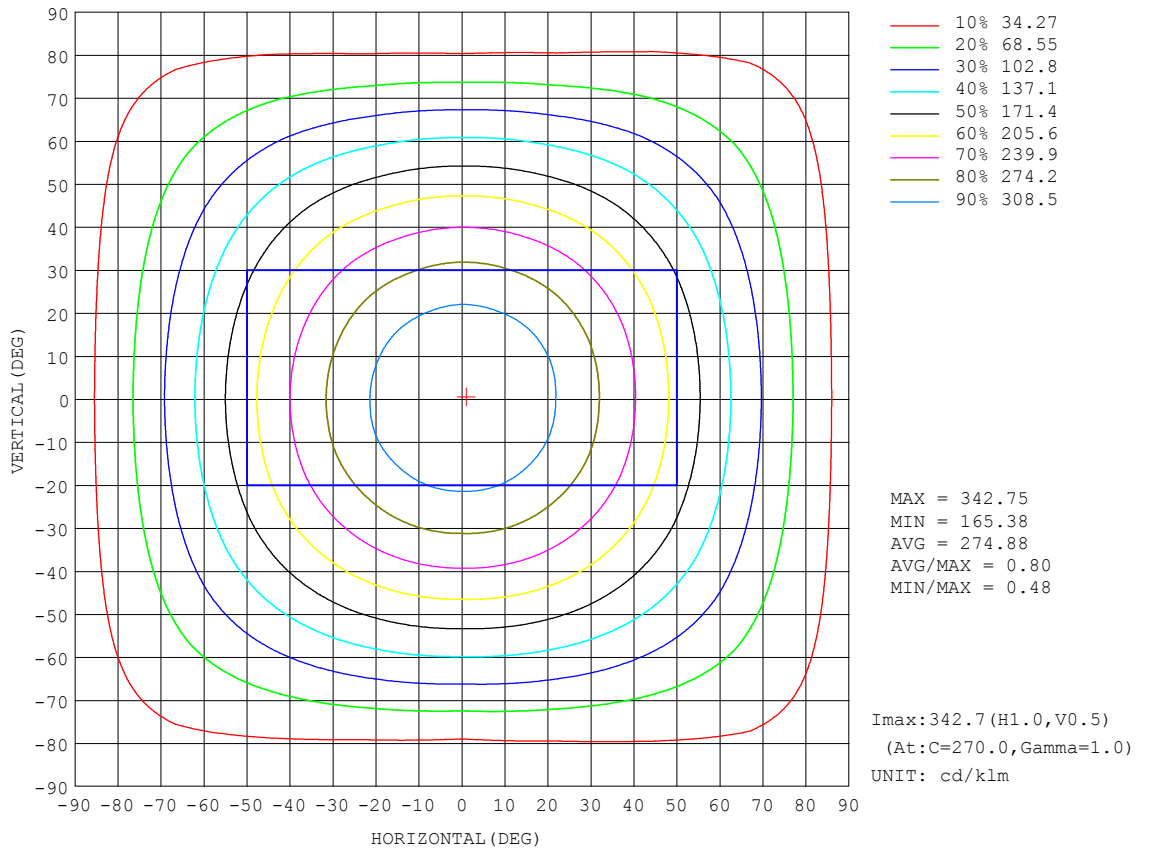


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.0DEG
 Test Date: 2020-8-13

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.429
 Humidity: 65.0%
 Test Distance: 7.000m [K=1.0000]
 Remarks:

AAI Figure

Test:U:23.999V I:0.1987A P:4.7686W PF:1.0000 Freq:0Hz Lamp Flux:492.727x1 lm		
NAME: CLK-01-50K	TYPE: LED Strip	WEIGHT: Kg
SPEC.: 4.3W	DIM.: 350*10*10(MM)	SERIAL No.: 001
MFR.: Flexfire LEDs, Inc.	SUR.: 340*10(MM)	Shielding Angle: 120

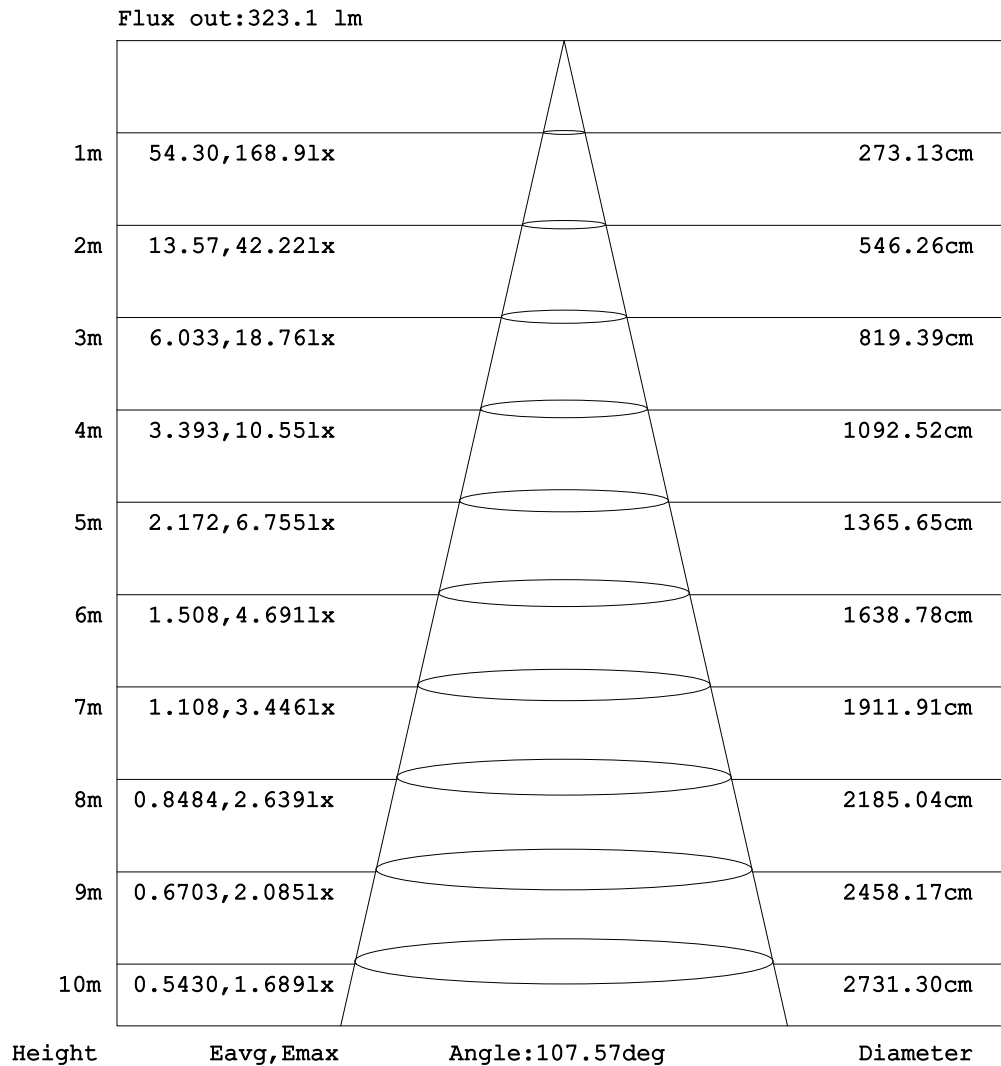


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.0DEG
 Test Date:2020-8-13

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.429
 Humidity:65.0%
 Test Distance:7.000m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:23.999V I:0.1987A P:4.7686W PF:1.0000 Freq:0Hz Lamp Flux:492.727x1 lm		
NAME: CLK-01-50K	TYPE: LED Strip	WEIGHT: Kg
SPEC.: 4.3W	DIM.: 350*10*10 (MM)	SERIAL No.: 001
MFR.: Flexfire LEDs, Inc.	SUR.: 340*10 (MM)	Shielding Angle: 120

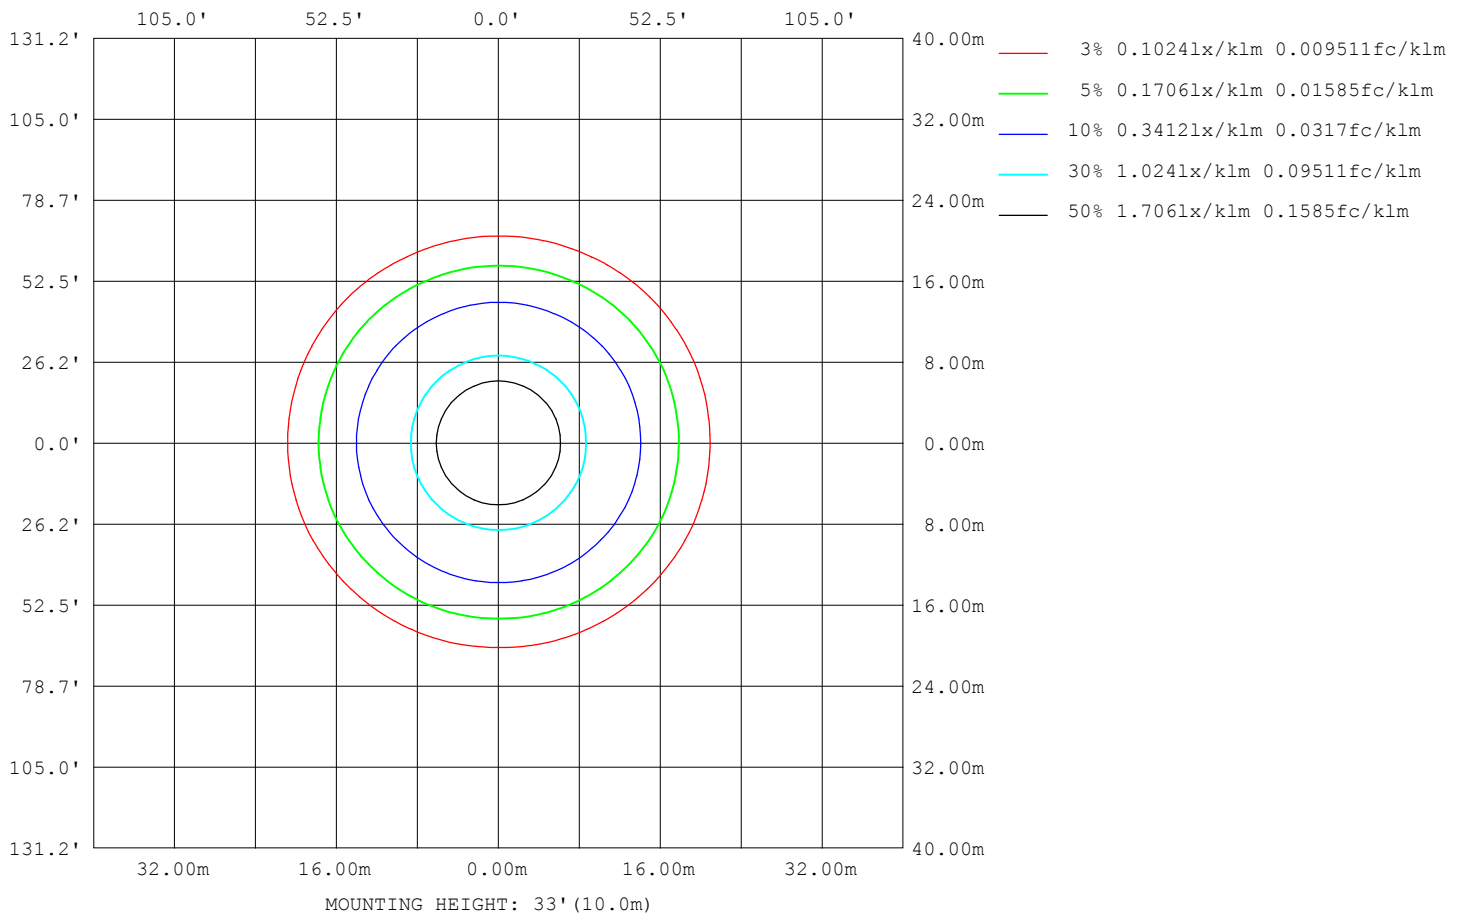

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.0DEG
 Test Date:2020-8-13

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.429
 Humidity:65.0%
 Test Distance:7.000m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:23.999V I:0.1987A P:4.7686W PF:1.0000 Freq:0Hz Lamp Flux:492.727x1 lm		
NAME: CLK-01-50K	TYPE: LED Strip	WEIGHT: Kg
SPEC.: 4.3W	DIM.: 350*10*10(MM)	SERIAL No.: 001
MFR.: Flexfire LEDs, Inc.	SUR.: 340*10(MM)	Shielding Angle: 120


AvgL	cd/m2
L_0~180 (65) av	36287
L_0~180 (75) av	36477
L_0~180 (85) av	51770
L_90~270 (65) av	32645
L_90~270 (75) av	27586
L_90~270 (85) av	16377
L_45 (65) av	34672
L_45 (75) av	32657
L_45 (85) av	37351

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.0DEG
 Test Date:2020-8-13

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.429
 Humidity:65.0%
 Test Distance:7.000m [K=1.0000]
 Remarks:

Planar Illuminance Curve

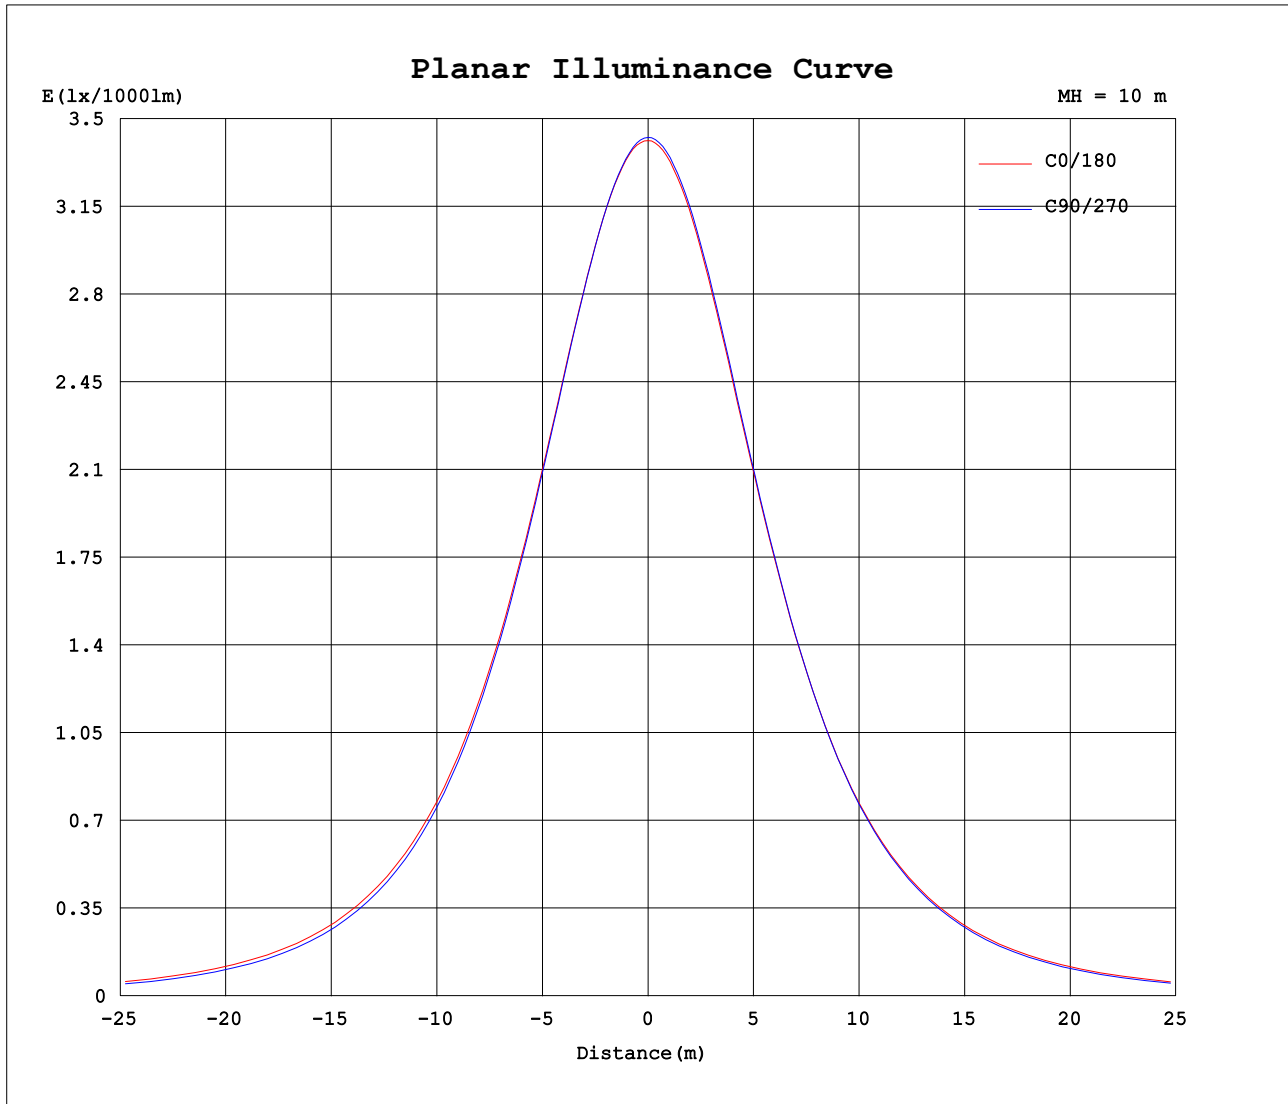

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.0DEG
 Test Date: 2020-8-13

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.429
 Humidity: 65.0%
 Test Distance: 7.000m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:23.999V I:0.1987A P:4.7686W PF:1.0000 Freq:0Hz Lamp Flux:492.727x1 lm		
NAME: CLK-01-50K	TYPE: LED Strip	WEIGHT: Kg
SPEC.: 4.3W	DIM.: 350*10*10(MM)	SERIAL No.: 001
MFR.: Flexfire LEDs, Inc.	SUR.: 340*10(MM)	Shielding Angle: 120

Table--1

UNIT: cd/klm

C (DEG) \ γ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	342	342	342	342	342	342	342	342	342	342	342	342	342	342	342	342			
5	341	341	340	340	340	340	340	340	340	340	340	340	341	341	341	341			
10	335	335	335	335	334	334	334	334	335	334	335	335	335	335	335	335			
15	327	327	326	326	325	325	325	325	325	325	326	326	326	326	327	327			
20	314	314	314	313	312	313	312	313	313	313	313	313	314	314	315	315			
25	300	300	298	298	297	297	297	298	298	298	298	298	299	299	300	299			
30	282	282	281	280	279	279	279	280	281	281	281	280	281	281	283	282			
35	263	263	261	260	258	259	259	261	261	261	261	260	261	261	263	263			
40	242	242	240	238	237	237	238	239	241	240	240	239	239	240	242	242			
45	220	220	217	215	213	214	215	217	218	218	218	216	216	217	219	220			
50	197	197	193	191	188	189	191	194	196	195	194	192	192	193	196	197			
55	174	173	169	165	163	164	166	170	172	171	170	167	167	168	172	174			
60	150	148	144	139	136	138	141	145	148	147	145	142	141	143	147	149			
65	126	124	118	113	109	112	116	121	123	123	120	116	115	117	122	125			
70	101	99.2	92.8	86.2	81.8	85.0	90.2	96.1	99.1	97.8	94.6	89.4	88.1	90.3	96.6	101			
75	77.8	75.1	67.8	60.0	54.8	58.6	65.2	72.0	75.5	73.9	69.7	63.4	61.2	64.3	71.8	76.8			
80	55.9	53.1	44.6	35.5	29.3	34.2	42.3	50.2	54.0	51.8	46.5	38.7	35.8	39.7	48.4	54.4			
85	37.5	34.4	25.7	15.7	8.81	14.7	24.0	32.1	35.8	33.4	27.3	18.3	14.4	18.9	28.6	35.5			
90	23.9	21.1	13.8	5.12	0.47	5.22	12.9	19.8	22.8	20.6	14.7	6.68	1.54	6.76	15.4	21.9			
95	16.2	14.2	8.04	3.19	0.58	3.61	8.68	13.4	15.5	13.8	9.39	4.23	0.53	4.21	9.62	14.4			
100	12.1	10.4	7.51	3.23	0.79	3.43	7.52	10.9	12.3	11.0	7.79	3.89	0.68	3.71	8.08	11.5			
105	11.3	10.1	7.51	3.83	0.96	3.39	7.04	9.93	11.0	10.00	7.24	3.67	0.86	4.11	7.89	10.7			
110	11.1	9.99	7.47	4.15	1.15	3.30	6.67	9.29	10.2	9.32	6.81	3.43	1.05	4.29	7.75	10.3			
115	10.7	9.75	7.45	4.17	1.35	3.15	6.36	8.68	9.47	8.69	6.44	3.22	1.25	3.80	7.67	9.97			
120	10.3	9.53	7.37	4.05	1.57	2.84	6.05	8.17	8.84	8.14	6.05	2.56	1.46	3.71	6.94	9.68			
125	9.95	9.23	7.37	3.95	1.76	2.73	5.71	7.65	8.21	7.58	5.65	2.09	1.67	3.78	6.56	8.65			
130	9.58	8.94	6.99	3.72	1.95	2.64	5.31	7.11	7.59	7.00	5.22	2.01	1.88	3.56	6.17	7.92			
135	9.17	8.62	5.54	3.69	2.15	2.56	4.57	6.50	6.96	6.39	4.29	2.10	2.08	3.57	5.12	7.54			
140	8.48	7.90	4.97	3.31	2.38	2.41	3.94	5.53	6.25	5.42	3.61	2.25	2.29	3.57	4.76	7.08			
145	6.63	5.60	4.86	2.81	2.58	2.60	3.41	4.31	5.00	4.48	2.70	2.48	2.51	3.61	4.44	5.96			
150	5.83	5.03	4.49	2.77	2.77	2.79	3.35	3.84	3.54	3.34	3.19	2.63	2.67	3.63	4.30	4.68			
155	5.67	4.59	3.94	2.92	2.91	2.93	2.92	3.65	3.53	3.40	2.80	2.77	2.81	3.32	4.10	4.39			
160	4.21	3.98	3.07	3.04	3.03	3.06	3.04	3.03	3.21	2.89	2.92	2.93	2.94	3.08	3.95	4.17			
165	3.13	3.10	3.11	3.14	3.14	3.15	3.12	3.15	3.05	2.97	3.07	3.04	3.08	3.05	3.73	4.00			
170	3.18	3.16	3.19	3.21	3.19	3.22	3.18	3.21	3.16	3.07	3.17	3.17	3.18	3.16	3.17	3.53			
175	3.26	3.19	3.24	3.23	3.25	3.22	3.25	3.24	3.20	3.16	3.23	3.21	3.21	3.22	3.21	3.22			
180	3.21	3.15	3.22	3.21	3.21	3.20	3.20	3.21	3.19	3.15	3.21	3.23	3.21	3.20	3.20	3.21			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.0DEG
 Test Date:2020-8-13

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.429
 Humidity:65.0%
 Test Distance:7.000m [K=1.0000]
 Remarks: