



### TECHNICAL DETAILS

- POWER OUT
- CUTTABLE
- DIMMABLE
- OUTDOOR
- RADIATION
- LED TYPE
- WEATHER
- REEL LENGTH
- WARRANTY
- CONTENT

### DIMENSIONS (inch/mm)

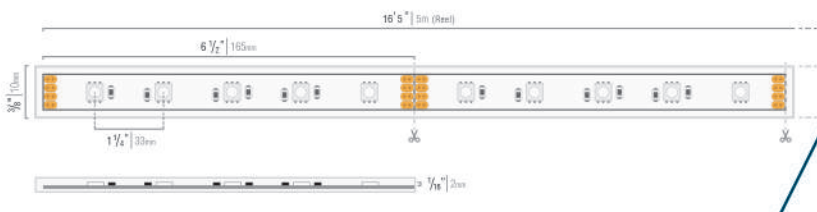

RGB 150

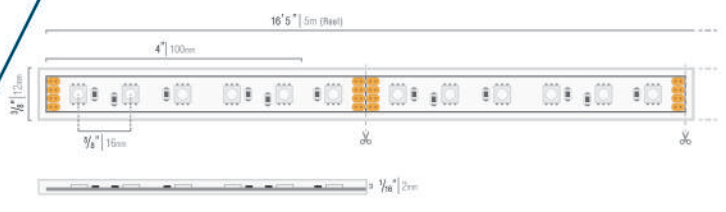

RGB 300

### TECHNICAL SPECS

	RGB	
	150	300
<b>R E E L</b> Model	IP65-CB-RGB-24V	IP65-CB-RGB2-24V
LED Chips	150	300
Lumens	Variable	Variable
Watts	36	72
Amps	1.5	3
Color Temp.	RGB	RGB
LED Chip Type	5050 SMD	5050 SMD
Voltage	24V DC	24V DC
Beam Angle	120°	120°
Max. Run in Series	48ft / 15m	32ft 10in / 10m

### WEATHERPROOF

IP65


#### Water & Dust Resistant

##### Protects Against:

- Rain & Humidity
- Water Splash
- Dust & Dirt
- Water Jets
- Particles

##### Application Ideas:

- Outdoor Bars & Kitchens
- Balconies & Terraces
- Decking & Eaves
- Boats & Marinas
- Automobiles



### SAFETY INFORMATION

- Please consult an electrician before doing any electrical work.
- The strip and its components cannot be mechanically pressed.
- Correct electrical polarity needs to be addressed.
- Pay attention to ESD precautions during assembly.
- Installation should be done by an electrician.
- Ensure that the power supply is able to operate the total load, failure to do so may cause damage to the LEDs or the driver.

### STORAGE CONDITIONS

- The LEDs should be kept at ≤ 86° F and ≤ 70% RH.
- When storing the LEDs use moisture proof packaging with absorbent silica gel packets.

V.15.10.09