



FLEXFIRELEDS

Product Catalog





We Are Here to Help!

We're an inspired and insatiably curious group of lighting nerds from various industries and walks of life who simply love giving great service. Since 2010, we have specialized in manufacturing and perfecting our lighting products that are used to illuminate beautiful interior and exterior spaces.

We offer some of the highest quality lights on the planet. We don't just sell light strips though We sell the full-functional potential of lighting done right. We understand the primordial connection between humanity and lighting. We believe that great lighting is biologically necessary for humans and emotionally satisfying. Beautiful lighting affects emotion. We will help you create your project's desired emotion: whether it is comfort, security, inspiration, love, excitement, focus, calm, etc.

Did I mention we love customer service? We promise to educate, not sell. We welcome every client's project as if it was our own. We believe in doing things right, from the most basic of components soldered into our products, to ensuring a smile on your face when your project is complete and finally 'comes to light'.

Thank you for your trust in Flexfire LEDs. We won't let you down.

Brent Mauriello, CEO

Flexfire LEDs

Welcome to Flexfire LEDs

Our goal is to offer you the best LED products in the world with the best customer experience! We are NOT just any brand LED products. We take pride in our first-class customer service and in our flawless product design and quality. From Netflix headquarters, to movie sets; from 5-star hotel rooms to the international space station; from your office to your very own home - our strips have been installed just about everywhere you could imagine.



Verified Quality and Durability

Flexfire products are consistently built to last. Our LEDs are tested to be among the brightest available and assembled reliably with quality top components. We set the highest standard for color consistency, longevity, and years of durable life.



Industry-Leading Educational Resources and Personnel

You no longer have to be confused by the complexity of LED technology. We're dedicated to spreading the word about the impact, utility and flexibility of LED lighting. In addition to holding ourselves to high standards, we participate in several industry organizations which set and maintain standards of safety and quality.



End-To-End Dedication to Customers and Their Projects

Whether you are a contractor or homeowner, architect or electrician: let us be your consultants. We have extensive experience and rally around the success of every project. Tell us about your LED lighting project and we'll tell you the most effective way to execute it.

Index



Intro to LED Strip Lighting:	What Are LED Strip Lights?	06
	Inspire: What Can LED Strips Do?	08
	Create: How to Design LED Strip Light Projects	09
	A Little About Light	11
	LED IP Ratings	13
Static White LED Strip Lights:	Outline™ Series	18
	Accent™ Series	20
	Slim™ Series	22
	Architectural™ Series	24
	Industrial™ Series	26
	Static White Comparison Chart	28
Tunable White LED Strip Lights:	Accent™ Dynamic Tunable White Series	33
	Architectural™ Dynamic Tunable White Series	35
	Sienna™ Dim-to-Warm Series	37
	Dynamic Tunable White Comparison Chart	39
RGB Color Changing LED Strip Lights:	RGB 150 Series	45
	RGB 300 Series	47
	RGB 600 Series	49
	RGBW Series	51
	RGB + Tunable White Series	53
	RGB Digital Pixel™ Series	55
	RGB Color Changing Comparison Chart	57
Single Color Output LED Strip Lights:	Vivid Color Series	62
	ColorBright™ Ultraviolet Series	64
	Single Color Comparison Chart	66
Specialty Lighting:	Lucid™ Flexible LED Neon Strip Lights	69
	Valor™ IP67 Premier Diffusion Series	74
	LED Light Sheets	77
	LED Light Sign Modules	80
LED Light Fixtures:	ClickBright™ Linkable LED Light Bars	86
	Endeavor™ 120V Cove Fixtures	89
	Victory™ Puck Lights	92
Accessories:	Mounting Channels	95
	Power Supplies	97
	Controllers, Dimmers, Connectors & Wire	99
Glossary:	LED Lighting Glossary	100



INTRODUCTION TO
LED Strip Lights

What Are LED Strip Lights?

An LED strip light is a flexible circuit board that is populated with LEDs. It has a strong adhesive backing and can easily be stuck to most surfaces. The strip can be utilized almost anywhere in order to add powerful lighting in a variety of colors and brightnesses.




Cut to Length

Our strips can be cut every few inches, meaning you can easily customize the strip to fit your space.




Flexible

You aren't limited to lighting flat spaces. LED strips are flexible and can be bent vertically up to soft 90 degrees.

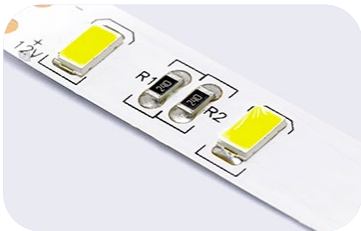

Low Profile

Most strips have a thickness of 1/16" (2 mm) so they may be installed in tight spaces and can easily be hidden from view.

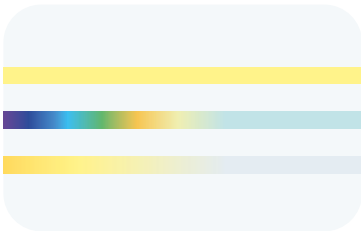

Color Options

Select from a variety of single colors and color changing options.



Added Protection

IP65 protection can be added to make the strips weather and water resistant.



Fully Dimmable

Our LEDs are dimmable and compatible with a variety of home automation systems, wall, and remote dimmers. You have complete control over your LEDs.



Peel & Stick

The back of the strip is fitted with a strong 3M brand adhesive tape, allowing you to peel and stick lights to many different surfaces.



Customizable

We are able to customize specialty strips for volume requirements to include custom colors, lengths, CRI, width, voltage, brightness, and more. Contact us to learn more.



Highest Safety Standards

Our LED strip lights are UL, CE, and RoHS listed. They do not contain any hazardous substances and pose no safety risks.

Our Warranties

We work our hardest to use only the highest quality components in our products. We recognize that most people do not use their lighting systems 24 hours a day, and strive to match our LED's longevity data with a warranty that fits the majority of our customers' use cases.



**Free project
advice**



**Up to 15-year
warranty**



**30-day money
back guarantee**



**Personalized
service & support**

Inspire: What Can LED Strips Do?

Our LED strip lights and accessories provide beautiful lighting solutions for a wide range of projects and applications. Each project you have may require special needs in terms of LED strip brightness, length, dimming constraints, and power usage.

Residential Applications



Coves



Above Cabinet



Under Cabinet



Under Counter



Toe Kicks



Stairways



Outdoor Accents



Bathroom Accents

Commercial Applications



Restaurant and Bars



Signage Lighting




Display / Merchandise



Hotel and Resort

Specialty Applications



Events and Stages



Terrarium Lighting



Ultraviolet (UV)




Art Displays

Create: How to Select Your Lighting System

LED strip lights are not “one size fits all” lighting solutions. Our strip lights are highly adaptable and customizable to fit the precise needs of your project. Follow the steps below to easily design your lighting system.

1 Choose Output Style

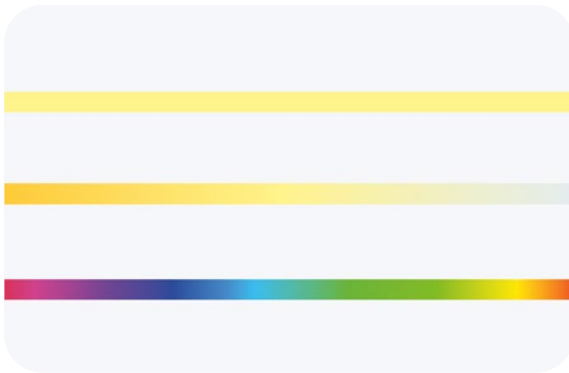


Choose from Monochromatic (Single Color), Dynamic Tunable White, or RGB Color Changing outputs. Which style best suits your project?

2 Choose Desired Brightness



Choose the level of brightness for your project. Our lights are fully dimmable and come in a variety of brightness levels.

3 Color Options

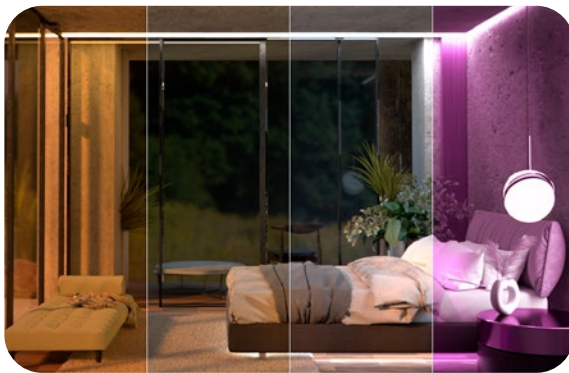

Choose which color(s) or shade of white you would like for your project.

4 Dimming & Control Options



Complete control of your space. On and off aren't your only options. LED strips are fully dimmable and can be controlled remotely.

5 Powering Your Lights



After you have chosen your output type, length, and dimmer, you can choose your power supply. Not sure? We're here to help you with this.

6 Added Protection



Will these be exposed to the elements? If so, choose IP65 rating or above to protect your lights from water, dust and debris.

7 Mounting Extrusions



Choose an optional aluminum channel to house your strip lights. Dramatically increase design possibilities using extrusions.

8 Connecting Your Lights



While soldering is the best option for connecting strip lights, we have a variety of connectors available to connect different strips to one another or to connect strips to power supplies.









A Little About Light

Correlated Color Temperature (CCT)



Not all white light appears the same. Correlated Color Temperature (CCT) defines the color appearance of a white light. CCT is defined in degrees Kelvin. Most white lights fall in a spectrum between 1800K and 6500K. When falling below 3000K, the light looks noticeably warmer like a candle. On the other end of the spectrum, the lights have a bluish tint and cooler tone when passing above 6500K. Some color temperatures will better suit your design than others. Choose complementary highlighting tones and look at example photos to find what you think will look best.

Lumen (Brightness)

Bulb \ Brightness	 450 lumens	 800 lumens	 1100 lumens	 1600 lumens	 2600 lumens	 5800 lumens
	LED	6W	9-10W	13W	16-18W	24W
CFL	8-9W	13-14W	18-19W	23W	40W	85W
Regular (Incandescent)	40W	60W	75W	100W	150W	300W
Halogen	29W	43W	53W	72W	150W	300W

A lumen is a measurement of lighting that represents the visible light output of a light source. We are all accustomed to using watts to measure the brightness of light, because of incandescent lighting. Today, we use lumens. Lumens are the most important variable when choosing your strip light. The higher the number, the brighter the light will be. Ensure that the strips you choose are bright enough for your application's intention.

CRI - Color Rendering Index



The Color Rendering Index (CRI), also known by some as color accuracy, is a term of measurement of how natural the light given off by a source looks in comparison to the sun. Have you ever purchased a red towel or dress in the store and when you try it on at home or wear it outside in the sun it looks different? This is because the CRI is different between the two light sources.



High CRI LEDs will show an object's true and vibrant color. The highest CRI is 100. Great CRI is measured above 80 while excellent CRI measures over 90. Our High CRI strips have a minimum 94 CRI and have been measured up to 98.


LED IP Ratings

IP is an acronym for Ingress Protection. It is a measurement of the protection an item will have against solid objects (dust, sand, dirt, etc.) and liquids. An IP rating is comprised of 2 numbers that give you information about the protection level. A higher number means greater protection. The first number (0-6) refers to the level of protection against solid objects and moving parts, such as dust, debris, or other solid matter. The second number (0-8) references the level of liquid and moisture protection.

Take a look at the chart below to better understand the protection offered with each number.

1st digit - SOLID Degree of protection against solid objects			2nd digit - LIQUID Degree of protection against water		
0	No Protection		0	No Protection	
1	Protected against a solid object greater than 50 mm, such as a hand.		1	Protected against water drops.	
2	Protected against a solid object greater than 12,5 mm, such as a finger.		2	Protected against water drops at a 15 degree angle.	
3	Protected against a solid object greater than 2,5 mm, such as a wire.		3	Protected against water sprays at a 60 degree angle.	
4	Protected against a solid object greater than 1 mm, such as a thin strap.		4	Protected against water splashing from any angle.	
5	Dust protected. Prevents ingress of dust sufficient to cause harm.		5	Protected against water jets from any angle.	
6	Dust tight. No ingress of dust.		6	Protected against powerful water jets and heavy seas.	
<div style="display: flex; justify-content: space-around; align-items: center;"> <div style="text-align: center;"> IP20</div> <div style="text-align: center;"> IP65</div> <div style="text-align: center;"> IP67</div> </div> <p>Most of our strips are available in IP20 or IP65 ratings, please take this into consideration when selecting the strip that best suits your project. Our Valor Series has an IP67 rating.</p>			7	Protected against the effects of temporary submersion in water. (30 minutes at 3 feet)	
			8	Protected against the effects of permanent submersion in water. (Up to 13 feet)	

Example: With an IP65 rating, the LEDs can be used in an outside setting and are water-resistant but they are not waterproof and are not suitable to be submerged. On the other hand, an IP67 rated strip could resist short accidental submersions.

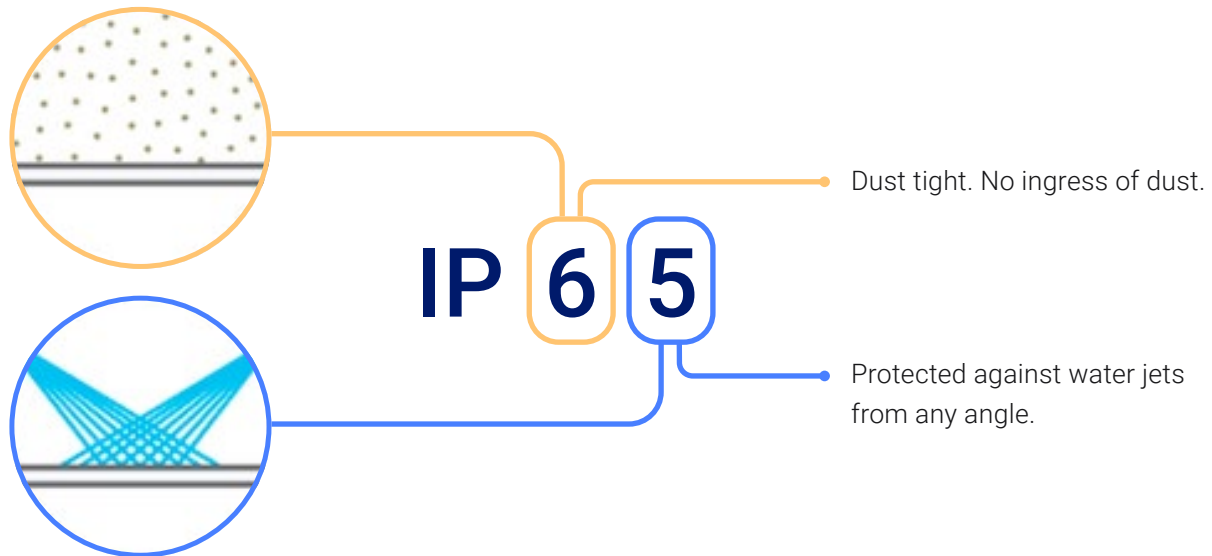

The differences between commonly sold IP65, IP67, & IP68 strips are slight, but very important. Using our chart as a guide, we can see that all these strips are protected at the highest level from solids and dust. The variations come with the protection against liquids.

IP65 = Water resistant. Protected against water jets from any angle. Do not submerge IP65 LED lights, these are not waterproof.

IP67 = Water resistant plus. Protected against the events of temporary submersion (10 minutes). Do not submerge IP67 LED lights for extended periods, these are not fully waterproof.

What IP Rating Will You Need?

If you don't anticipate a harsh environment that is extremely dusty or wet then a lower IP rating would suffice. In places that will have a lot of dust, debris, or potential to be in contact with any solids or liquids, you'll want to make sure that the IP ratings are high and that you have adequate water resistant or waterproof coatings on your LED strip lights.

Low IP ratings are appropriate for indoor use, protected use inside sealed products, inside sealed signage, when using aluminum extrusions. High IP ratings are appropriate for unsealed outdoor locations, places that have a lot of debris, areas with heavy foot traffic, high splash areas, high contact areas (people touching them) and wet locations.

Static White

LED STRIP LIGHTS

From subtle to bright output with near-perfect CRI. Find the perfect white LED strip for any commercial or residential application.





Outline™ Series

The Outline™ Series is specifically designed to create long runs of elegant, energy-efficient lighting. Perfect for accent and ambient lighting with near-perfect color rendering.



Lumen Output:

Up to 132 lm/ft (434 lm/m)



Power:

1.5 W/ft (4.8 W/m)



Color Temperatures:

27K, 30K, 35K, 40K, 50K



Accent™ Series

The Accent™ Series is a perfect blend of innovative design with practical functionality that guarantees sophisticated lighting made for beautiful accent and ambient lighting. One of our favorite strips!



Lumen Output:

Up to 300 lm/ft (985 lm/m)



Power:

3.5 W/ft (11.5 W/m)



Color Temperatures:

27K, 30K, 35K, 40K, 50K



Slim™ Series

Some spaces are too narrow to accommodate standard width strip lights. The Slim™ Series is ultra-thin (1/8" - 4 mm wide) allowing you to add blazingly bright light to even more spaces.



Lumen Output:

Up to 391 lm/ft (1,255 lm/m)



Power:

4.6 W/ft (15.1 W/m)



Color Temperatures:

30K, 50K



Architectural™ Series

The Architectural™ Series is boldly built with the market's leading components to create an incredibly bright strip with excellent color rendering and long run lengths. Meets the high standards of architectural design and complex lighting projects.



Lumen Output:

Up to 502 lm/ft (1,646 lm/m)



Power:

4.4 W/ft (14.4 W/m)



Color Temperatures:

27K, 30K, 35K, 40K, 50K



Industrial™ Series

The Industrial™ Series is one of the brightest strips on the market, emitting up to a staggering 1,156 lm/ft while sustaining a high color rendering index. Best suited for industrial and architectural design applications, along with custom OEM solutions.



Lumen Output:

Up to 1019 lm/ft (3344 lm/m)



Power:

6.6 W/ft (21.7 W/m)



Color Temperatures:

30K, 35K, 40K, 50K, 62K


[> Visit Product Page](#)

Outline™ Series



15-year warranty



Description

Our UltraBright™ Outline Series offers full-range dimming, ultra-vivid color rendering, and extended run lengths. Available in various shades of white, from warm to cool, this seamless line of light's subtle glow excels at soft embellishments and outlining in residential and commercial settings. It's ideal for nuanced cove and accent lighting, as well as spaces requiring discreet ambiance and mood enhancement.



Lumen Output:

Up to 132 lm/ft (434 lm/m)



Power:

1.5 W/ft (4.8 W/m)



Color Temperatures:

27K, 30K, 35K, 40K, 50K




Available IP Versions

Product Features

- High CRI up to 97
- High R9 (99) & R13 (97) values
- Up to 132 lm/ft (434 lm/m)
- Fully dimmable
- Highest quality components and premium packaged 2216 LEDs
- Single bin LED selection to ensure color consistency (3-Step MacAdam)
- Thermally resistant 3M VHB adhesive for long lasting bond
- 120° beam angle
- Efficacy up to 86 lm/W
- 24V DC input voltage
- Can be cut every 2" (51 mm)
- Ambient temperature: -4°F to 113°F (-20°C to 45°C)
- Thick double layer 4 oz copper PCB for excellent thermal management
- 37 LEDs/ft (120 LEDs/m)
- Maximum run length in series: 82 ft (25 m)
- Can be used to comply with Title 24 for CCTs below 4000K

Dimensions

IP20

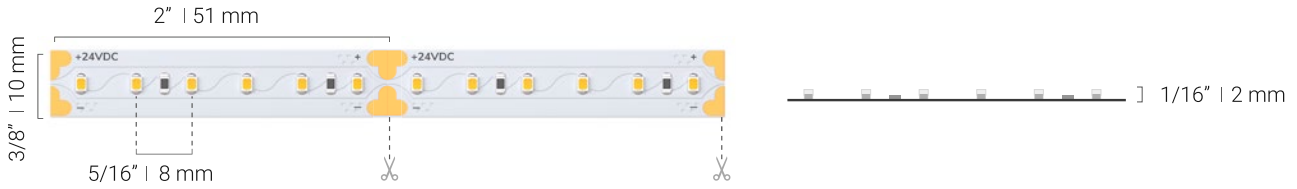


IP65



Specifications

Product SKU	Color (CCT)	Watts / Foot (Meter)	Lumen / Foot (Meter)	Luminous Efficacy (Lumens / Watt)	CRI	Gamut Score Rg (Color Sat.)	Relative Fidelity Score (RF)	TLCI (Qa)	CQS
UB-OL-27K97C	2700K	1.5 W/ft 4.8 W/m	123 lm/ft (402 lm/m)	78 lm/W	97	105	95	95	96
UB-OL-30K97C	3000K	1.5 W/ft 4.8 W/m	122 lm/ft (399 lm/m)	83 lm/W	97	103	96	98	97
UB-OL-35K97C	3500K	1.5 W/ft 4.8 W/m	129 lm/ft (423 lm/m)	83 lm/W	97	103	96	98	98
UB-OL-40K95C	4000K	1.5 W/ft 4.8 W/m	130 lm/ft (427 lm/m)	85 lm/W	97	103	96	98	98
UB-OL-50K95C	5000K	1.5 W/ft 4.8 W/m	132 lm/ft (434 lm/m)	86 lm/W	96	103	96	99	98

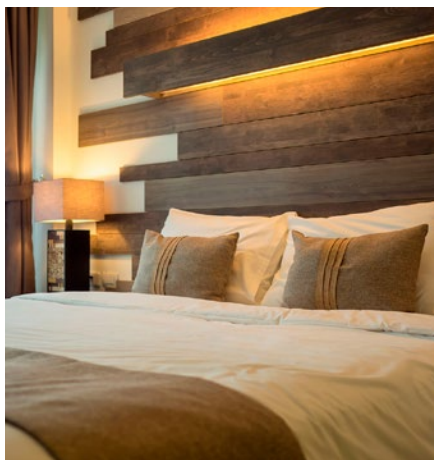

Accent™ Series

[> Visit Product Page](#)


15-year
warranty



Description

Our UltraBright™ Accent Series offers full-range dimming, vivid color rendering, finely spaced cut points, and extended run lengths. Available in various shades of white, from warm to cool, this seamless line of light's gentle brightness is perfect for accent and decorative purposes in residential and commercial spaces. It's ideal for cove lighting, backlighting, highlighting architectural details and displays, and more.



Lumen Output:

Up to 300 lm/ft (985 lm/m)



Power:

3.5 W/ft (11.5 W/m)



Color Temperatures:

27K, 30K, 35K, 40K, 50K



Available IP Versions

Product Features


- High CRI of 97
- High R9 (99) & R13 (98) values
- Up to 300 lm/ft (985 lm/m)
- Fully dimmable
- Highest quality components and premium packaged 2216 LEDs
- Single bin LED selection to ensure color consistency (3-Step MacAdam)
- Thermally resistant 3M VHB adhesive for long lasting bond
- 120° beam angle
- Efficacy up to 80 lm/W
- 12V or 24V DC input voltage
- Can be cut every 1" (25 mm)
- Ambient temperature: -4°F to 113° (-20°C to 45°C)
- Thick double layer 4 oz copper PCB for excellent thermal management
- 73 LEDs/ft (240 LEDs/m)
- Maximum run length in series: 32 ft (10 m) in 12V, 49 ft (15 m) in 24V
- Can be used to comply with Title 24 for CCTs below 4000K

Dimensions

IP20



IP65

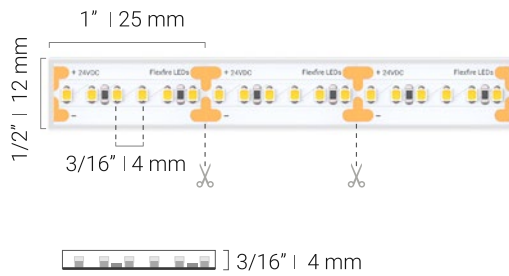

Specifications

Product SKU	Color (CCT)	Watts / Foot (Meter)	Lumen / Foot (Meter)	Luminous Efficacy (Lumens / Watt)	CRI	Gamut Score Rg (Color Sat.)	Relative Fidelity Score (RF)	TLCI (Qa)	CQS
UB-AT1-27K97C	2700K	3.5 W/ft 11.5 W/m	267 lm/ft (877 lm/m)	76 lm/W	97	105	95	95	96
UB-AT1-30K97C	3000K	3.5 W/ft 11.5 W/m	275 lm/ft (901 lm/m)	78 lm/W	97	103	96	98	98
UB-AT1-35K97C	3500K	3.5 W/ft 11.5 W/m	281 lm/ft (921 lm/m)	80 lm/W	97	103	96	98	98
UB-AT1-40K95C	4000K	3.5 W/ft 11.5 W/m	263 lm/ft (864 lm/m)	75 lm/W	97	102	96	98	98
UB-AT1-50K95C	5000K	3.5 W/ft 11.5 W/m	300 lm/ft (985 lm/m)	80 lm/W	97	103	96	99	98



Slim™ Series



7-year
warranty



[> Visit Product Page](#)

Description

Our UltraBright™ Slim Series is an extra-thin, fully dimmable LED strip with powerful LED chips and adhesive. It's tailored for high brightness, efficient heat dissipation, and superior color rendering and consistency. As one of the most narrow products available, it is favored by architects and lighting designers for elegant and discreet installations, as well as OEMs for product integration.



Lumen Output:

Up to 391 lm/ft (1,255 lm/m)



Power:

4.6 W/ft (15.1 W/m)



Color Temperatures:

30K, 50K




Available IP Versions

Product Features


- High CRI up to 95
- Up to 391 lm/ft (1,255 lm/m)
- Fully dimmable
- Highest quality components and premium packaged 2835 LEDs
- Single bin LED selection to ensure color consistency (3-Step MacAdam)
- Thermally Resistant 3M 300 LSE adhesive for long lasting bond
- 120° beam angle
- Efficacy up to 90 Lumens/W
- 24V DC input voltage
- Can be cut every 2" (50 mm)
- Ambient temperature -4°F to 113°F (-20°C to 45°C)
- Thick double layer 4 oz copper PCB for excellent thermal management
- 36 LEDs/ft (120 LEDs/m)
- Maximum run length in series: 16 ft (5 m)

Dimensions

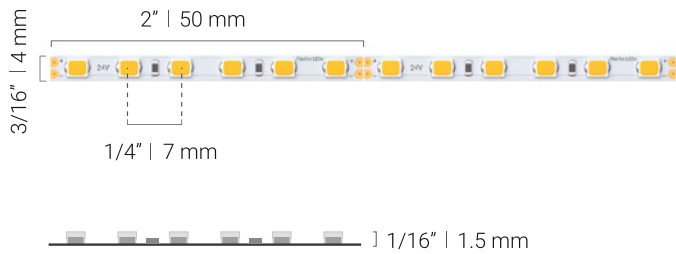

Specifications

Product SKU	Color (CCT)	Watts / Foot (Meter)	Lumen / Foot (Meter)	Luminous Efficacy (Lumens / Watt)	CRI	Gamut Score Rg (Color Sat.)	Relative Fidelity Score (RF)
UB-SS-30K90C	3000K	4.6 W/ft 15.1 W/m	360 lm/ft (1,180 lm/m)	81 lm/W	94	100	92
UB-SS-50K90C	5000K	4.6 W/ft 15.1 W/m	391 lm/ft (1,285 lm/m)	90 lm/W	95	99	91

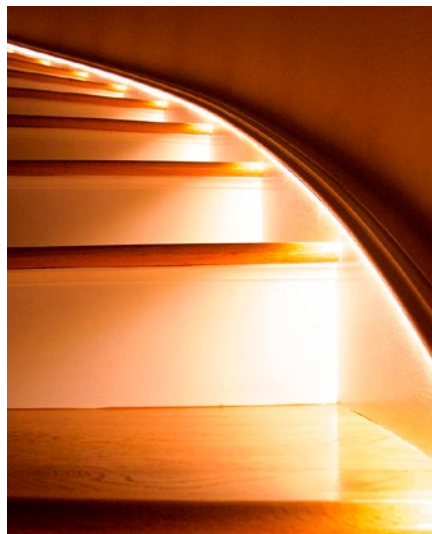

[> Visit Product Page](#)

Architectural™ Series

15-year
warranty

Description

Our UltraBright™ Architectural Series offers full-range dimming, vivid color rendering, and extended run lengths. Available in various shades of white, from warm to cool, this strip light provides seamless lines of light perfect for architectural design and task and ambient lighting. It's ideal for cove, linear, and display lighting, as well as residential or commercial areas requiring high illumination.

**Lumen Output:**

Up to 502 lm/ft (1,646 lm/m)

**Power:**

4.4 W/ft (14.4 W/m)

**Color Temperatures:**

27K, 30K, 35K, 40K, 50K

**Available IP Versions**

Product Features

- High CRI up to 98
- High R9 (98) & R13 (100) values
- Up to 502 lm/ft (1,646 lm/m)
- Fully dimmable
- Highest quality components and premium packaged 3014 LEDs
- Single bin LED selection to ensure color consistency (3-Step MacAdam)
- Thermally resistant 3M VHB adhesive for long lasting bond
- 120° beam angle
- Efficacy up to 116 lm/W
- 12V or 24V DC input voltage
- 12V can be cut every 1" (25 mm)
- 24V can be cut every 2" (51 mm)
- Ambient temperature: -4°F to 113°F (-20°C to 45°C)
- Thick double layer 4 oz copper PCB for excellent thermal management
- 49 LEDs/ft (160 LEDs/m)
- Maximum run length in series: 16 ft (5 m) in 12V, 42 ft (13 m) in 24V
- Can be used to comply with Title 24 for CCTs below 4000K


Dimensions

12V

IP20




IP65

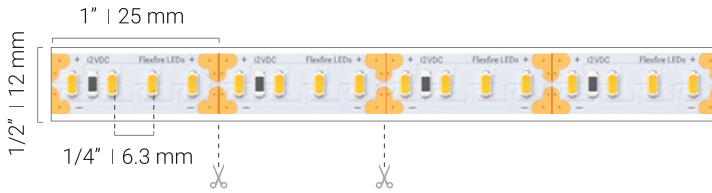


24V

IP20

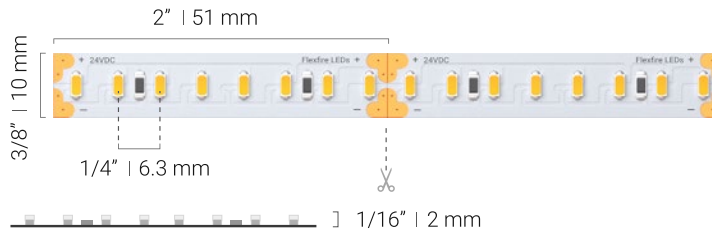

IP65

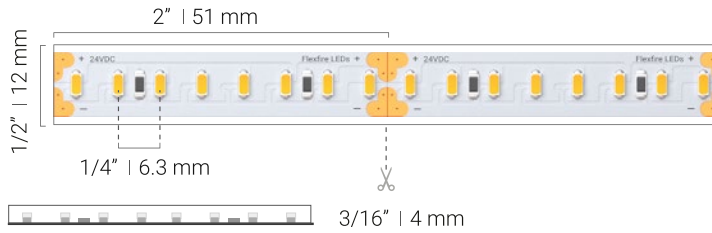

Specifications

Product SKU	Color (CCT)	Watts / Foot (Meter)	Lumen / Foot (Meter)	Luminous Efficacy (Lumens / Watt)	CRI	Gamut Score Rg (Color Sat.)	Relative Fidelity Score (RF)	TLCI (Qa)	CQS
UB-AS-27K90C	2700K	4.4 W/ft 14.4 W/m	466 lm/ft (1,528 lm/m)	104 lm/W	98	101	95	97	96
UB-AS-30K90C	3000K	4.4 W/ft 14.4 W/m	478 lm/ft (1,567 lm/m)	108 lm/W	94	100	92	94	93
UB-AS-35K90C	3500K	4.4 W/ft 14.4 W/m	499 lm/ft (1,636 lm/m)	112 lm/W	95	100	92	95	93
UB-AS-40K90C	4000K	4.4 W/ft 14.4 W/m	493 lm/ft (1,616 lm/m)	114 lm/W	97	99	92	98	95
UB-AS-50K90C	5000K	4.4 W/ft 14.4 W/m	502 lm/ft (1,646 lm/m)	116 lm/W	95	98	91	96	92


[> Visit Product Page](#)

Industrial™ CRI 90+ Series



7-year warranty



Description

Our UltraBright™ Industrial Series is one of the brightest, most potent LED strips on the market. Complemented by near-perfect color-rendering capabilities, its extraordinarily high output guarantees consistent radiance and uniformity, replacing shadows or unevenness with powerful lines of light. This makes it an industry-leading solution for manufacturing facilities, signage, edge lighting, high-end commercial applications, and OEM product integrations.



Lumen Output:

Up to 1019 lm/ft (3344 lm/m)



Power:

6.6 W/ft (21.7 W/m)



Color Temperatures:

30K, 35K, 40K, 50K, 62K



Available IP Versions

Product Features

- High CRI up to 96
- Up to 972 lm/ft (3,187 lm/m)
- Fully dimmable
- Highest quality components and premium packaged 2835 LEDs
- Single bin LED selection to ensure color consistency (3-Step MacAdam)
- Thermally resistant 3M VHB 4930 adhesive for long lasting bond
- 120° beam angle
- Efficacy up to 153 lm/W
- 12V or 24V DC input voltage
- 12V can be cut every 1 1/4" (32 mm)
- 24V can be cut every 2 1/2" (64 mm)
- Ambient temperature -4°F to 104°F (-20°C to 40°C)
- Thick double layer 4 oz copper PCB for excellent thermal management
- 36 LEDs/ft (120 LEDs/m)
- Maximum run length in series: 9 ft (3 m) in 12V, 19 ft (6 m) in 24V
- Can be used to comply with Title 24 for CCTs below 4000K

Dimensions

12V



24V







Specifications

Product SKU	Color (CCT)	Watts / Foot (Meter)	Lumen / Foot (Meter)	Luminous Efficacy (Lumens / Watt)	CRI	Gamut Score Rg (Color Sat.)	Relative Fidelity Score (RF)	TLCI (Qa)	CQS
UB-IS-30K90C	3000K	6.6 W/ft 21.6 W/m	939 lm/ft (3,079 lm/m)	146 lm/W	96	101	92	90	95
UB-IS-35K90C	3500K	6.6 W/ft 21.6 W/m	916 lm/ft (3,004 lm/m)	144 lm/W	96	100	91	91	94
UB-IS-40K90C	4000K	6.6 W/ft 21.6 W/m	923 lm/ft (3,029 lm/m)	147 lm/W	94	99	90	89	92
UB-IS-50K90C	5000K	6.6 W/ft 21.6 W/m	972 lm/ft (3,187 lm/m)	153 lm/W	95	100	90	93	92
UB-IS-62K90C	6200K	6.6 W/ft 21.6 W/m	942 lm/ft (3,089 lm/m)	140 lm/W	93	96	88	95	91



Static White Strips Comparison Chart

LED Strip	Color (CCT)	Brightness	Lumens / ft	Watts / ft	Lumens / Watt	Ingress Protection	CRI	Voltage	Max Run (in series)
 Outline™ Series	27K 30K 35K 40K 50K		~ 132	1.5	~ 86	IP20 IP65	~ 97	24V	82 ft
 Accent™ Series	27K 30K 35K 40K 50K		~ 300	3.5	~ 80	IP20 IP65	~ 97	12V 24V	32 ft 49 ft
 Slim™ Series	30K 50K		~ 391	4.6	~ 90	IP20	~ 95	24V	16 ft
 Architectural™ Series	27K 30K 35K 40K 50K		~ 502	4.4	~ 116	IP20 IP65	~ 98	12V 24V	16 ft 42 ft
 Industrial™ Series	30K 35K 40K 50K 62K		~ 972	6.6	~ 153	IP20	~ 98	12V 24V	9 ft 19 ft



Project Gallery


Static White





Backlighting
Outline™ Series



Under Cabinet Lighting
Accent™ Series

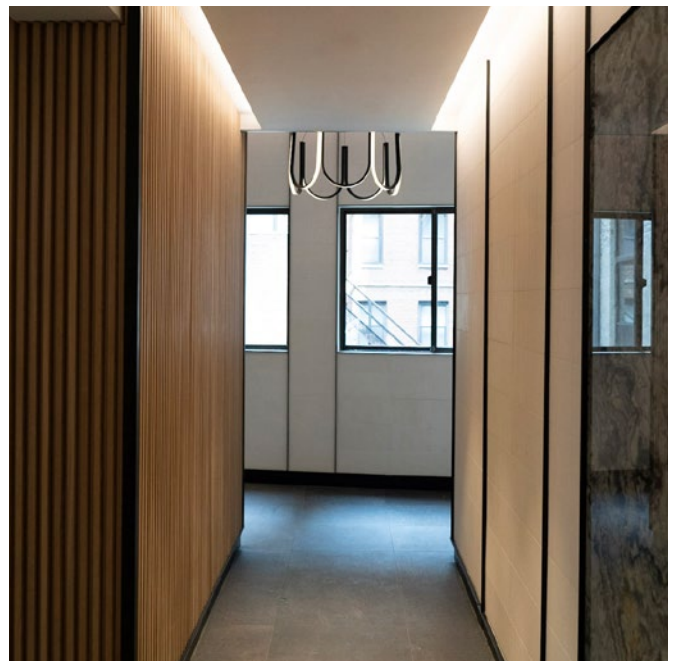

Cove / Ceiling Lighting
Architectural™ Series

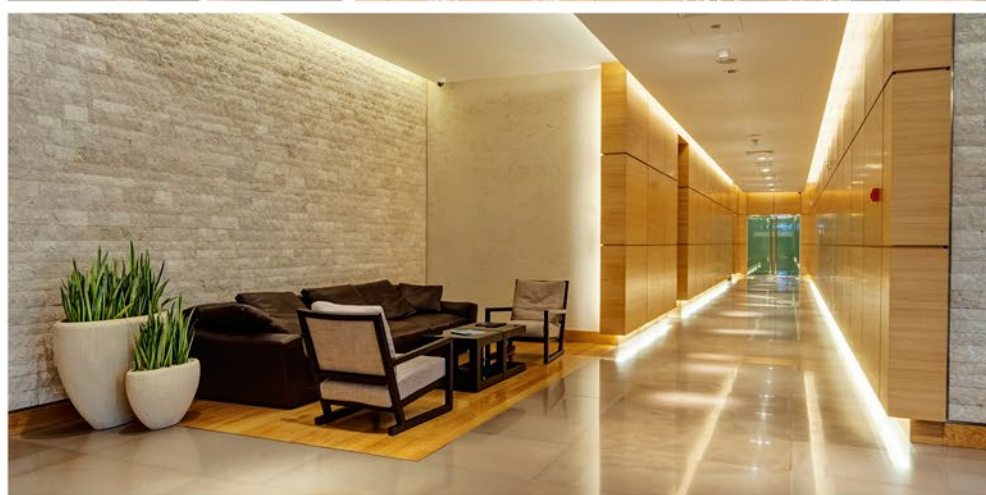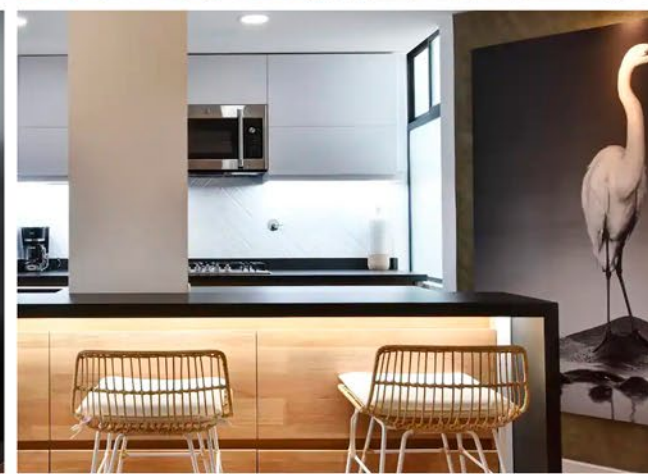

Dynamic Tunable White

LED STRIP LIGHTS

Precise white color temperature at the click of a button. Select your favorite tone and set the perfect mood.





Accent™ Dynamic Tunable White

Our UltraBright™ Accent Dynamic Tunable White Series is the perfect choice for people who are looking for an accent lighting strip that will allow them to find the perfect shade of white. Choose from a wide range of color temperatures between 2700K to 6200K.



Lumen Output:

Up to 277 lm/ft (909 lm/m)



Power:

3.5 W/ft (11.5 W/m)



CCT Range:

2700K - 6200K



Architectural™ Dynamic Tunable White

The UltraBright™ Architectural Dynamic Tunable White Series offers countless color temperatures and high brightness so you can create the perfect light in any room, at any time. Pair it with a remote control system to take full advantage of the tunable capabilities.



Lumen Output:

Up to 517 lm/ft (1699 lm/m)



Power:

4.6 W/ft (15.1 W/m)



CCT Range:

2700K - 6200K



Sienna™ Dim-to-Warm Series

Natural, seamless dimming for perfect lighting. As you dim your lights, the color temperature of the lights will automatically become warmer from 3000K to 1800K.



Lumen Output:

Up to 311 lm/ft (1,020 lm/m)



Power:

3.4 W/ft (11 W/m)



CCT Range:

3000K - 1800K

Accent™ Dynamic Tunable White Series

[> Visit Product Page](#)



15-year
warranty



Description

Our UltraBright™ Accent Dynamic Tunable White Series boasts full-range dimming and vivid color rendering. Pair it with a control system and transition from warm to cool whites with ease. Ideal for human-centered lighting, you can sync it with your body's circadian rhythm, enriching environments and moods. This seamless line of light offers moderate brightness, perfect for accent and decorative purposes.



Lumen Output:

Up to 277 lm/ft (909 lm/m)



Power:

3.5 W/ft (11.5 W/m)



CCT Range:

2700K - 6200K



Available IP Versions

Product Features

- Control strip to produce any color of white between 2700K and 6200K
- High CRI up to 99
- Up to 266 lm/ft (872 lm/m)
- Fully dimmable
- Highest quality components and premium packaged 2216 LEDs
- Single bin LED selection to ensure color consistency (3-Step MacAdam)
- Thermally resistant 3M VHB adhesive for long lasting bond
- 120° beam angle
- Efficacy up to 84 lm/W
- 24V DC input voltage
- Can be cut every 2" (50 mm)
- Ambient temperature -4°F to 104°F (-20°C to 40°C)
- Thick double layer 4 oz copper PCB for excellent thermal management
- 73 LEDs/ft (240/m)
- Maximum run length in series: 49 ft (15 m)

Dimensions

IP20




IP65



Specifications

Product SKU	Color (CCT)	Watts / Foot (Meter)	Lumen / Foot (Meter)	Luminous Efficacy (Lumens / Watt)	CRI	Gamut Score Rg (Color Sat.)	Relative Fidelity Score (RF)	TLCI (Qa)
UB-AT1-DYN276295C	All channels on	3.5 W/ft (11.5 W/m)	277 lm/ft (909 lm/m)	81 lm/W	95	105	95	98
	2700K	1.7 W/ft (5.7 W/m)	134 lm/ft (439 lm/m)	79 lm/W	98	102	96	98
	6200K	1.7 W/ft (5.7 W/m)	145 lm/ft (475 lm/m)	85 lm/W	96	104	95	99

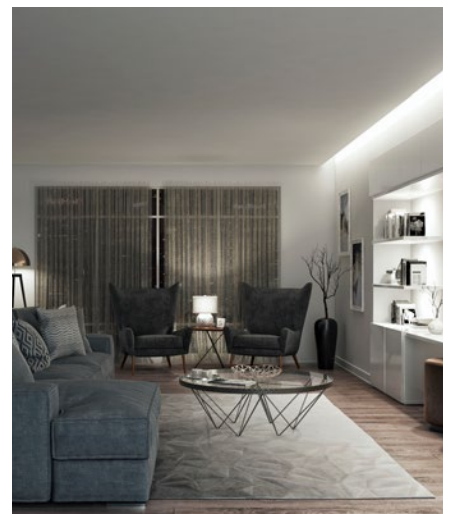

Architectural™ Dynamic Tunable White Series

[> Visit Product Page](#)


15-year
warranty



Description

Our UltraBright™ Architectural Dynamic Tunable White Series features full-range dimming, vivid color rendering, and easy transitions between warm and cool whites when paired with a control system. Ideal for human-centered lighting, you can sync it with your circadian rhythm, enriching environments and moods. This seamless line of light offers high brightness, perfect for architectural design and task and ambient lighting.



Lumen Output:

Up to 517 lm/ft (1699 lm/m)



Power:

4.6 W/ft (15.1 W/m)



CCT Range:

2700K - 6200K




Available IP Versions

Product Features


- Control strip to produce any color of white between 2700K and 6200K
- High CRI up to 94
- Up to 494 lm/ft (1,621 lm/m)
- Fully dimmable
- Highest quality components and premium packaged 3014 LEDs
- Single bin LED selection to ensure color consistency (3-Step MacAdam)
- Thermally resistant 3M VHB adhesive for long lasting bond
- 120° beam angle
- Efficacy up to 108 lm/W
- 24V DC input voltage
- Can be cut every 4" (101 mm)
- Ambient temperature -4°F to 104°F (-20°C to 40°C)
- Thick double layer 4 oz copper PCB for excellent thermal management
- 49 LEDs/ft (160/m)
- Maximum run length in series: 32 ft (10 m)

Dimensions

IP20

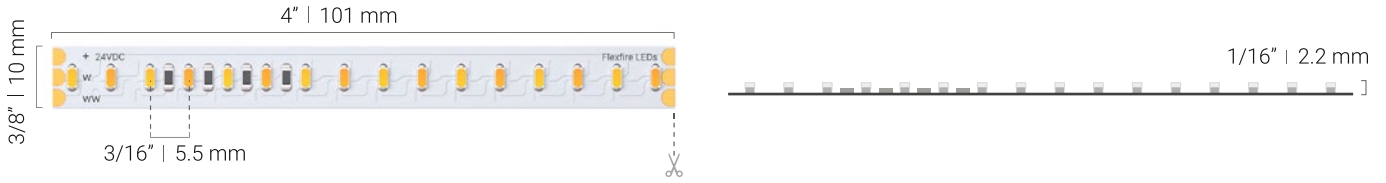


IP65

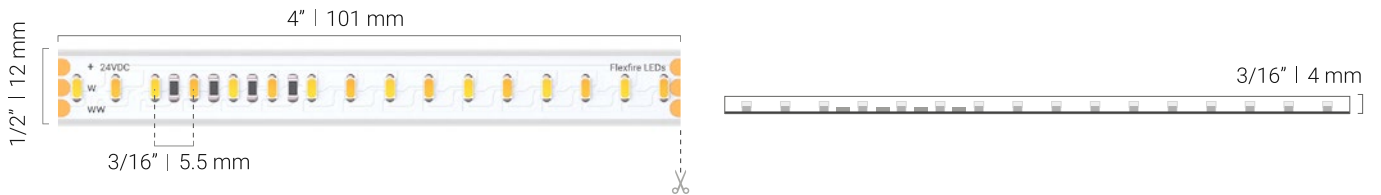

Specifications

Product SKU	Color (CCT)	Watts / foot (Meter)	Lumen / foot (Meter)	Luminous efficacy (Lumens / Watt)	CRI	Gamut Score Rg (Color Sat.)	Relative Fidelity Score (RF)	TLCI (Qa)
UB-AS-DYN276290C	2700K +6200K	4.6 W/ft (15 W/m)	517 lm/ft (1699 lm/m)	106 lm/W	96	100	90	96
	2700K	2.3 W/ft (7.5 W/m)	233 lm/ft (765 lm/m)	101 lm/W	94	100	91	93
	6200K	2.3 W/ft (7.5 W/m)	268 lm/ft (882 lm/m)	117 lm/W	94	98	88	94

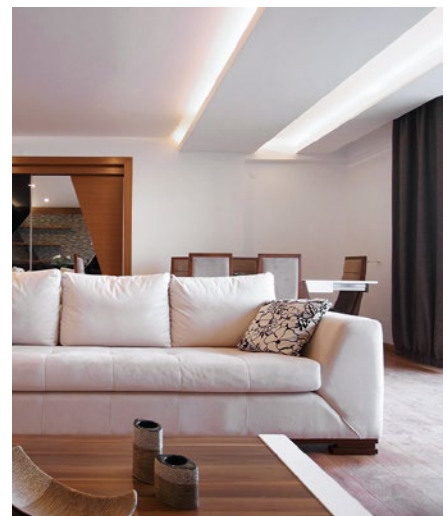

Sienna™ Dim-to-Warm Series

[> Visit Product Page](#)


15-year
warranty



Description

Our UltraBright™ Sienna Dim-to-Warm LED strip delivers vivid color rendering and innovative dimming technology, replicating the familiar glow of traditional incandescent lighting. Smoothly transition from warm to warmer whites as you turn down the lights, setting intimate, relaxed, or nostalgic moods. This seamless line of light is moderately bright, perfect for accent and decorative uses.



Lumen Output:

Up to 311 lm/ft (1,020 lm/m)



Power:

3.4 W/ft (11 W/m)



CCT Warms as it Dims:

3000K - 1800K




Available IP Versions

Product Features


- High CRI up to 95
- Up to 311 lm/ft (1,020 lm/m)
- Highest quality components and premium packaged 2835 LEDs
- Single bin LED selection to ensure color consistency (3-Step MacAdam)
- Thermally resistant 3M VHB adhesive for long lasting bond
- 120° beam angle
- Efficacy up to 99 lm/W
- 24V DC input voltage
- Can be cut every 3 3/8" (83.3 mm)
- Ambient temperature -4°F to 113°F (-20°C to 45°C)
- Thick double layer 4 oz copper PCB for excellent thermal management
- 51 LEDs/ft (168/m)
- Maximum run length in series: 16 ft (5 m)
- Compatible with most PWM, TRIAC, or 0/1-10V dimmers

Dimensions

IP20

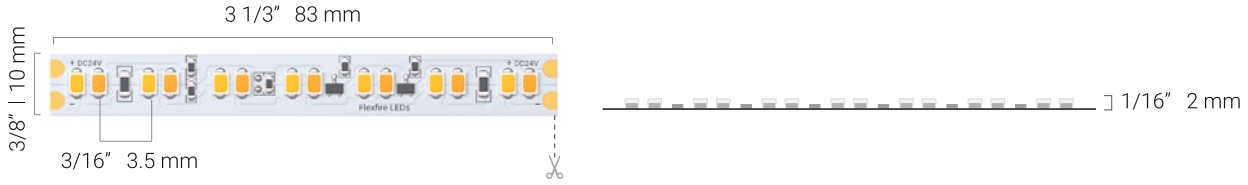


IP65

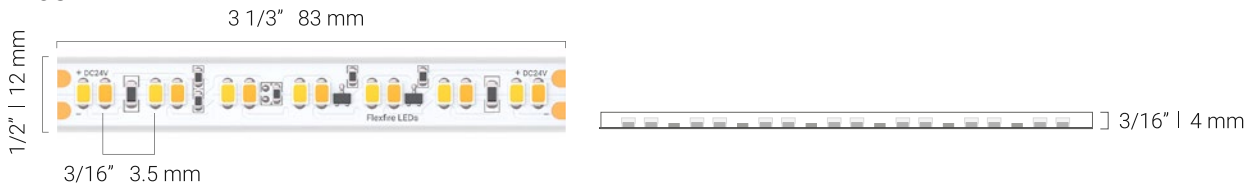




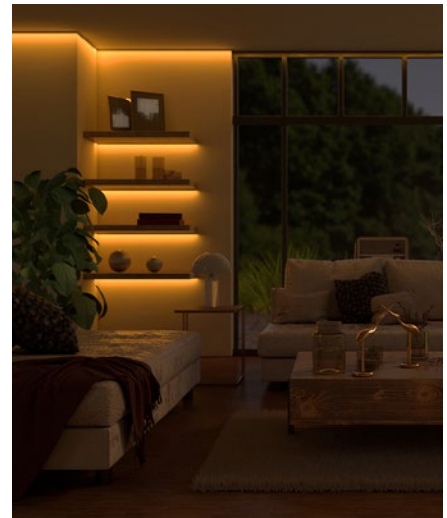


Specifications

Product SKU	Color (CCT)	Watts / foot (Meter)	Lumen / foot (Meter)	CRI	Gamut Score Rg (Color Sat.)	Relative Fidelity Score (RF)	TLCI (Qa)	CQS
UB-SNAD-W183090C	1800K	0.4 W/ft (1.3 W/m)	20 lm/ft (67 lm/m)	95	73	77	54	54
	3000K	3.4 W/ft (11 W/m)	311 lm/ft (1020 lm/m)	94	100	92	93	93



Dynamic Tunable White Strips Comparison Chart

LED Strip	Color Temperatures (CCT)	Brightness	Lumens / ft	Watts / ft	Lumens / Watt	Ingress Protection	CRI	Voltage	Max Run (in series)
 Accent™ Dynamic Tunable White Series	2700K - 6200K		~ 277	3.5	~ 85	IP20 IP65	~ 98	24V	49 ft
 Architectural™ Dynamic Tunable White Series	2700K - 6200K		~ 517	4.6	~ 117	IP20 IP65	~ 96	24V	32 ft
 Sienna™ Dim-to-Warm Series	1800K - 3000K		~ 311	3.4	~ 99	IP20 IP65	~ 95	24V	16 ft



Project Gallery

Dynamic Tunable White



Leestone Interiors



Lobby Lighting

Outdoor Architectural™ Dynamic Tunable White Series



Leestone Interiors




Patio Lighting

Outdoor Architectural™ Dynamic Tunable White Series



Under Cabinet Lighting

Architectural™ Dynamic Tunable White Series

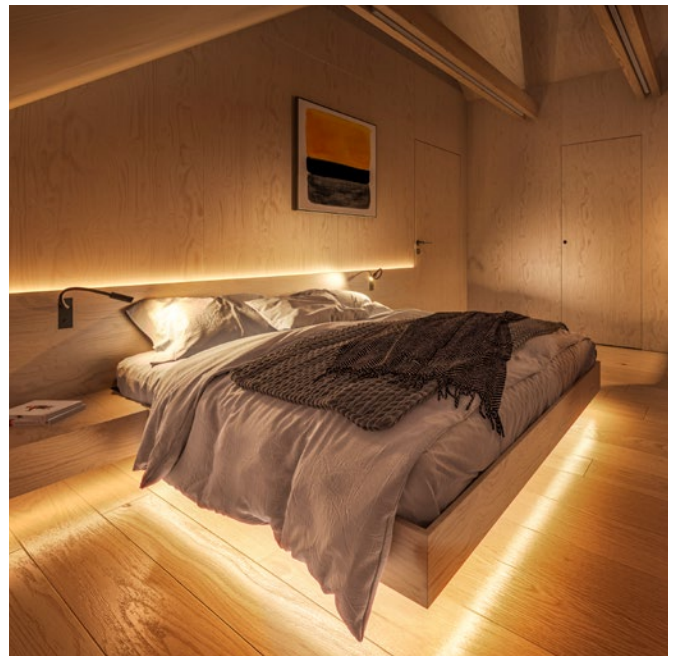


Raised Bed Lighting

Sienna™ Dim-to-Warm Series



RGB Color Changing LED STRIP LIGHTS



Our ColorBright™ RGB strip lights are the highest quality in the market with a warranty of up to 15 years. We believe in providing innovative solutions to transform your living spaces into unique pieces of functional art.





RGB 150 Series

This strip uses an advanced color mixing technology of 150 RGB color-changing LEDs per reel capable of creating millions of different color combinations, allowing you to create a soft accent hue of your choice.



9 LEDs/Foot
Perfect accent light



Power:
2.2 W/ft (7.2 W/m)



**Millions
of colors**



RGB 300 Series

The RGB 300 series utilizes the same technology as the RGB 150 series, but it has double the LEDs and double the brightness. This popular strip also allows you to create millions of colors, but its higher chip density creates an even brighter, beautiful glow.



18 LEDs/Foot
Uniform lines of light



Power:
4.4 W/ft (14.4 W/m)



**Millions
of colors**



RGB 600 Series

These LED strip lights are around 80% brighter than the ColorBright™ RGB 300. Overall, our ColorBright™ RGB 600 LED Strip Light is a next-generation RGB strip with improved features that contribute to a great quality of light.



36 LEDs/Foot
Seamless lines of light



Power:
6.1 W/ft (20 W/m)



**Millions
of colors**



RGBW Color Changing + White Series

The ColorBright™ RGBW Quad Chip LED strip light is an ingenious product that combines two powerful strips into one. It features a 4-in-1 LED chip that produces both RGB color-changing and warm white lighting.



Lumen Output:

Up to 293 lm/ft (961 lm/m)



Power:

5.8 W/ft (19 W/m)



RGB + White

(3000K)



RGB Color Changing + Tunable White Series

Our ColorBright™ RGB + Dynamic Tunable White LED Strip Light combines two types of powerful strips into one, offering an RGB color-changing feature and a wide range of dynamic tunable white lighting that can be tuned from 2400K to 6500K.



Lumen Output:

Up to 260 lm/ft (853 lm/m)



Power:

5.5 W/ft (18 W/m)



RGB + Tunable White

(2400K - 6500K)



RGB Digital Pixel™ Series

This strip incorporates a small integrated circuit every 6 LEDs creating a Pixel, for a total of 50 pixels in a 5-meter reel. The ability to control those 50 pixels individually gives way to beautiful, dynamic, breathtaking effects.



**WS2811 IC
Protocol**



Power:

3.6 W/ft (12 W/m)



Colors:

RGB Pixels

[> Visit Product Page](#)

RGB 150 Series

15-year
warranty

Description

Our ColorBright™ RGB 150 LED Strip Lights boast limitless color-changing capabilities and exceptional color saturation. Paired with a control system, they capitalize on impressive dynamic modes and effects, including flashing, strobing, and fading. With 150 top-quality LED chips, this product delivers gentle brightness with soft touches of color, ideal for creative backlighting, cove lighting, and accent and decorative purposes.

**9 LEDs/Foot**

Perfect accent light

**Power:**

2.2 W/ft (7.2 W/m)


**Millions
of colors****Available IP Versions**

Product Features


- Fully dimmable and color controllable
- Highest quality components and premium packaged 5050 LEDs
- Thermally resistant 3M VHB adhesive for long lasting bond
- 120° beam angle
- 24V DC input voltage
- Can be cut every 6 1/2" (165 mm)
- Ambient temperature -4°F to 104°F (-20°C to 40°C)
- Thick double layer 4oz copper PCB for excellent thermal management
- Maximum run length in series: 49 ft 2 in (15 m)

Dimensions

IP20

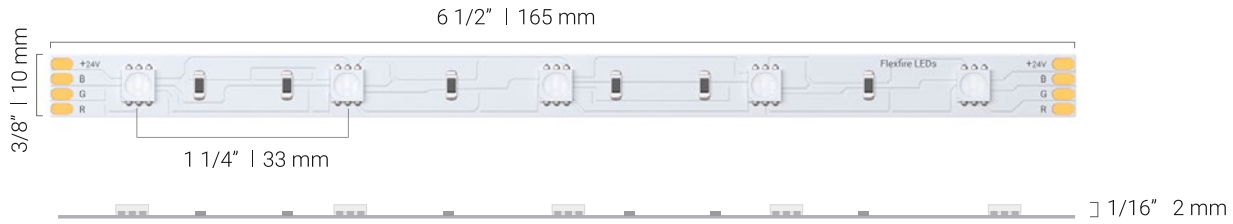


IP65

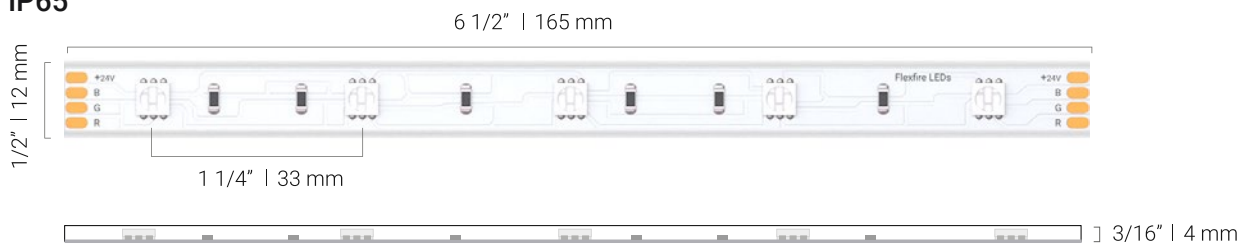

Specifications

Product SKU	LEDs / Foot (Meter)	Voltage Input	Watts / Foot (Meter)	Lumens / Foot (Meter)	Color Wavelengths (Nanometer)	Max. Run Length in Series
CB-RGB150	9 LEDs/Foot (30/meter)	24V DC	2.2 W/ft (7.2 W/m)	R: 11LM (35/m) G: 46LM (150/m) B: 10LM (30/m)	R: 617-627 nm G: 515-525 nm B: 464-474 nm	49' 2" (15 meters)

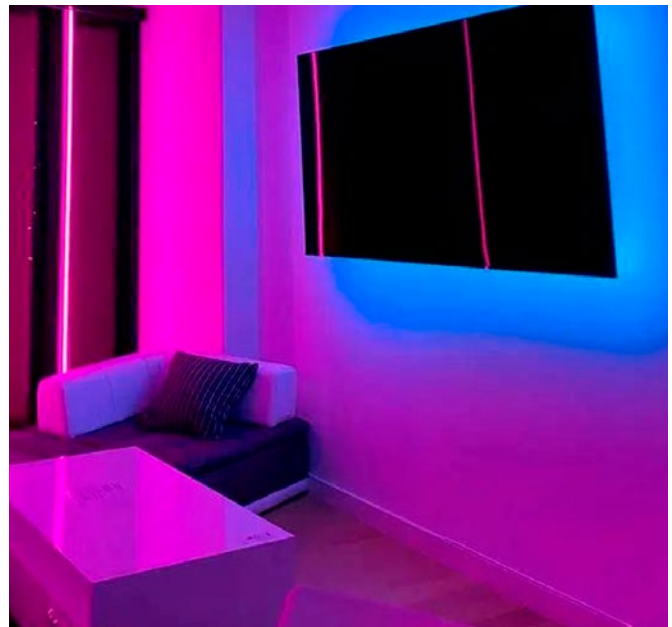


[> Visit Product Page](#)

RGB 300 Series



15-year
warranty



Description

Our ColorBright™ RGB 300 LED Strip Lights boast limitless color-changing capabilities and exceptional color saturation. Paired with a control system, they capitalize on impressive dynamic modes and effects, including flashing, strobing, and fading. With 300 top-quality LED chips, their high output and bold color splashes suit creative lighting applications—cove, edge, and ambiance lighting, among others—in both residential and commercial settings.



18 LEDs/Foot
Uniform lines of light



Power:
4.4 W/ft (14.4 W/m)



**Millions
of colors**




Available IP Versions

Product Features


- Fully dimmable and color controllable
- Highest quality components and premium packaged 5050 LEDs
- Thermally resistant 3M VHB adhesive for long lasting bond
- 120° beam angle
- 24V DC input voltage
- Can be cut every 4" (100 mm)
- Ambient temperature -4°F to 113°F (-20°C to 45°C)
- Thick double layer 4oz copper PCB for excellent thermal management
- Maximum run length in series: 32 ft (10 m) in 24 V

Dimensions

IP20

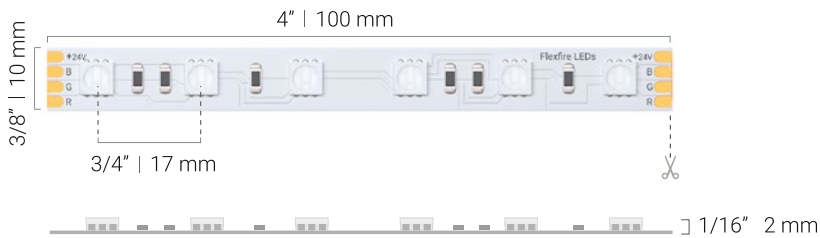

IP65

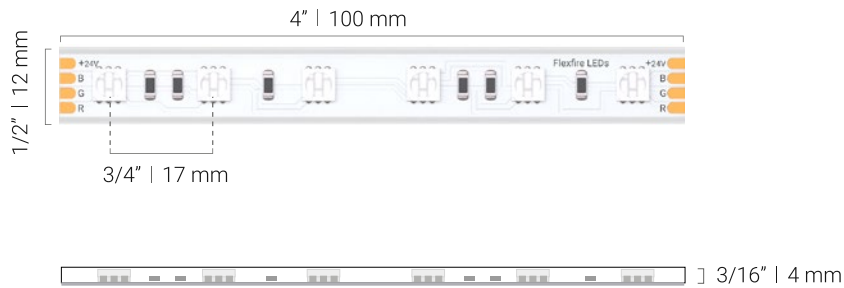

Specifications

Product SKU	LEDs / Foot (Meter)	Voltage Input	Watts / Foot (Meter)	Lumens / Foot (Meter)	Color Wavelengths (Nanometer)	Segment Lengths	Max. Run Length in Series
CB-RGB300	18 LEDs/Foot (60/meter)	24V DC	4.4 W/ft (14.4 W/m)	151 lm/ft (495 lm/m)	R: 617-627 nm G: 515-525 nm B: 464-474 nm	4" (100 mm)	32' 10" (10 meters)

[> Visit Product Page](#)

RGB 600 Series

7-year
warranty

Description

Our ColorBright™ RGB 600 LED Strip Lights boast limitless color-changing capabilities and exceptional color saturation. Paired with a control system, they capitalize on impressive dynamic modes and effects, including flashing, strobing, and fading. With 600 top-quality LED chips, their ultra-bright output and striking color bursts make for impactful statements in residential or commercial areas, particularly in applications requiring intense illumination.

**36 LEDs/Foot**

Seamless lines of light

**Power:**

6.1 W/ft (20 W/m)


**Millions
of colors****Available IP Versions**

Product Features


- Fully dimmable and color controllable
- Highest quality components and premium packaged 4040 SMD LEDs
- Thermally resistant 3M VHB adhesive for long lasting bond
- 120° beam angle
- 24V DC input voltage
- Can be cut every 2" (50 mm)
- Ambient temperature -4°F to 113°F (-20°C to 45°C)
- Thick double layer 3oz copper PCB for excellent thermal management
- Maximum run length in series: 26 ft (8 m)

Dimensions

IP20


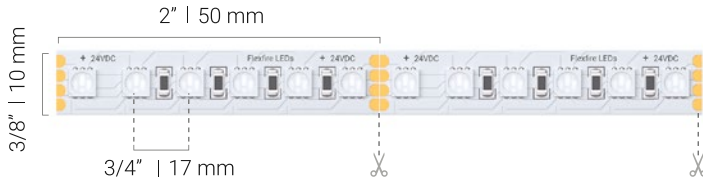


IP65

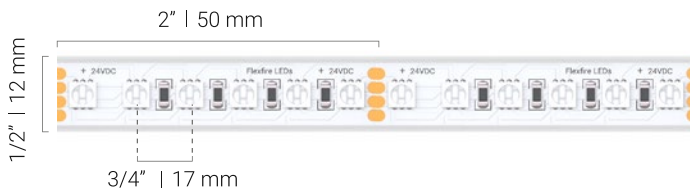

Specifications

Product SKU	LEDs / Foot (Meter)	Voltage Input	Watts / Foot (Meter)	Lumens / Foot (Meter)	Color Wavelengths (Nanometer)	Segment Lengths	Max. Run Length in Series
CB-RGB600	36 LEDs/Foot (120/meter)	24V DC	6.1 W/ft (20 W/m)	231 lm/ft (759 lm/m)	R: 617-627 nm G: 520-530 nm B: 464-474 nm	2" (50 mm)	26 ft (8 meters)

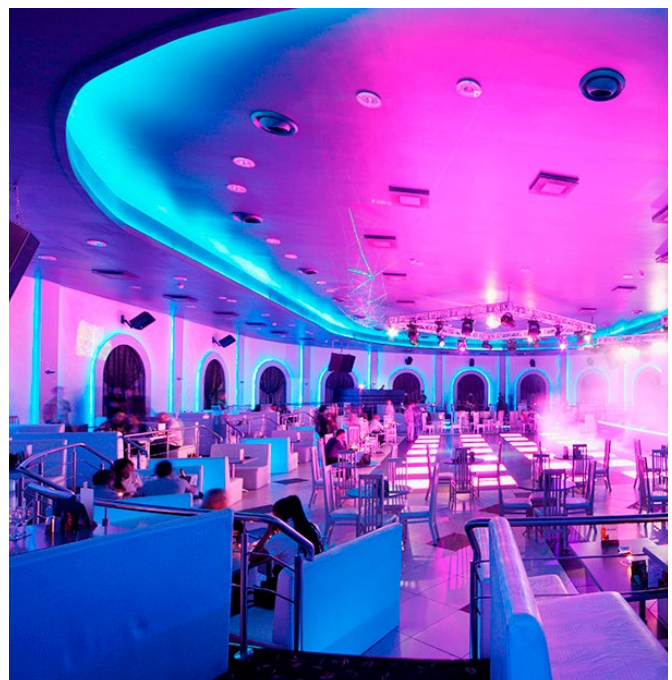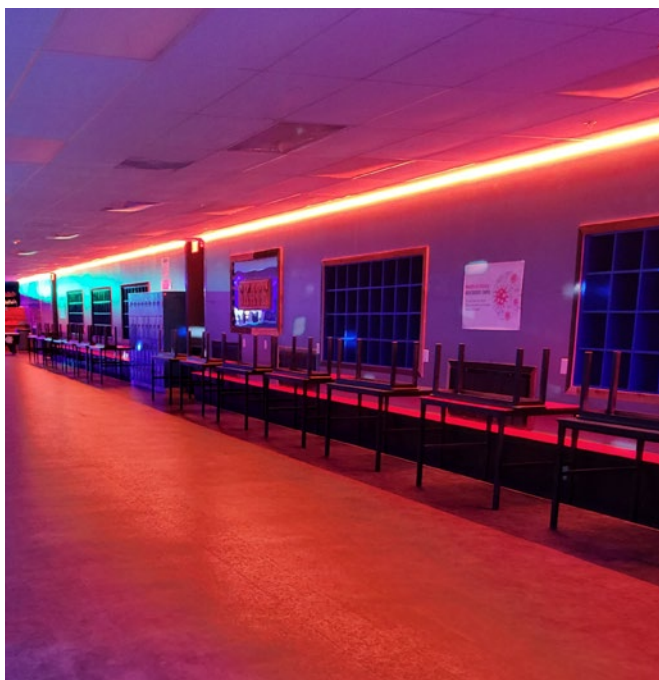

RGBW Color Changing + White Series

[> Visit Product Page](#)



7-year warranty



Description

Our ColorBright™ RGBW Quad Chip LED Strip Lights incorporate stylish white and limitless color-changing capabilities thanks to our groundbreaking 4-in-1 chips. Their exceptional color saturation and smooth transitions are complemented by the inviting moderate brightness of fully-dimmable warm lights. Pair them with a control system for ultimate customization, accentuating spaces with white or refreshing them with a splash of color.



Lumen Output:

Up to 293 lm/ft (961 lm/m)



Power:

5.8 W/ft (19 W/m)



RGB + White

(3000K)




Available IP Versions

Product Features


- Fully dimmable and color controllable
- Highest quality components and premium packaged 5050 LEDs
- Single bin LED selection to ensure color consistency (3-Step MacAdam)
- Thermally resistant 3M VHB adhesive for long lasting bond
- 120° beam angle
- 24V DC input voltage
- Can be cut every 3" (80 mm)
- Ambient temperature -4°F to 113°F (-20°C to 45°C)
- Thick double layer 4oz copper PCB for excellent thermal management
- Maximum run length in series: 32 ft 10 in (10 m)

Dimensions

IP20

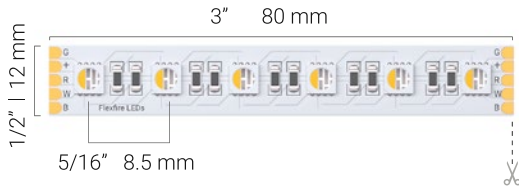

IP65

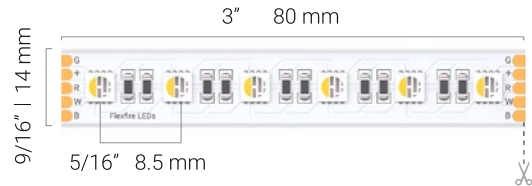

Specifications

Product SKU	Color (CCT)	Watts / Foot (Meter)	Lumen / Foot (Meter)	Luminous Efficacy (Lumens/Wat)	CRI	Gamut Score (Rg)	Relative Fidelity Score (Rf)	TLCI (Qa)
CB-RGBW	All channels on	5.8 W/ft (19 W/m)	293 lm/ft (961 lm/m)	52 lm/W	56	107	69	44
	3000K	1.4 W/ft (4.6 W/m)	121 lm/ft (397 lm/m)	79 lm/W	93	100	92	93



RGB Color Changing + Tunable White Series

[> Visit Product Page](#)



7-year
warranty



Description

Our ColorBright™ RGB + Dynamic Tunable White LED Strip Light really is an LED strip light for all occasions. Combining two strips in one, it allows for the creation of countless colors and multiple shades of white light in a smooth and vibrant line of light, thanks to its 5-in-1 5050 LED chips, which total 18 chips per foot. This product is for those who love to control every aspect of their lives, starting with their lights. Perfect for spaces that require the flexibility of multiple types of light.



Lumen Output:

Up to 260 lm/ft (853 lm/m)



Power:

5.5 W/ft (18 W/m)



RGB + Tunable White

(2400K - 6500K)




Available IP Versions

Product Features

- Millions of vivid colors + any shade of white
- Highest quality components and premium packaged 5050 LEDs
- Thermally resistant 3M VHB adhesive for long lasting bond
- 120° beam angle
- 24V DC input voltage
- Can be cut every 4" (101 mm)
- Ambient temperature -4°F to 113°F (-20°C to 45°C)
- Thick double layer 3oz copper PCB for excellent thermal management
- Maximum run length with 3 channels on: 23 ft
- Maximum run length with all channels on: 16 ft

Dimensions

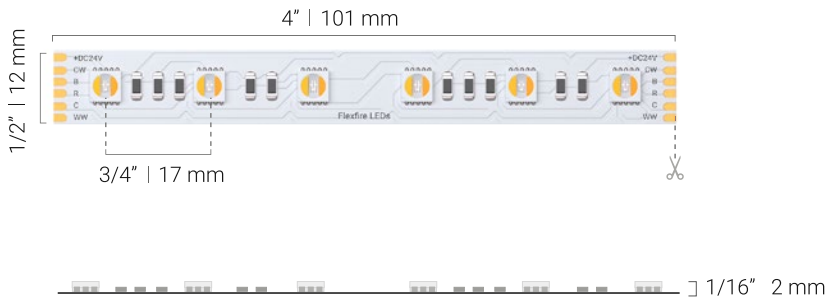

Specifications

Product SKU	Color (CCT)	Watts / Foot (Meter)	Lumen / Foot (Meter)	Luminous Efficacy (Lumens / Watt)	CRI	Gamut Score Rg (Color Sat.)	Relative Fidelity Score (RF)	TLCI (Qa)	CQS
CB-RGBDYN-2465K	All Channels On	5.5 W/ft (18 W/m)	260 lm/ft (853 lm/m)	48 lm/W	64	109	75	56	82
	2400K	1.1 W/ft (3.6 W/m)	113 lm/ft (371 lm/m)	67 lm/W	94	100	93	92	94
	6500K	1.1 W/ft (3.6 W/m)	109 lm/ft (357 lm/m)	76 lm/W	95	97	89	94	91



RGB Digital Pixel™ Series

[> Visit Product Page](#)



7-year
warranty



Description

Our ColorBright™ RGB Digital Pixel LED Strip Lights feature integrated pixels—small circuit segments that offer individual control and interaction—with limitless color-changing capabilities and exceptional color saturation. Paired with a digital control system, these produce stunning dynamic effects and patterns ideal for cutting-edge commercial and entertainment environments, as well as state-of-the-art households. Additionally, they offer easily adjustable brightness, speed, and direction.



**WS2811 IC
Protocol**



Power:
3.6 W/ft (12 W/m)



Colors:
RGB Pixels




Available IP Versions

Product Features


- Fully dimmable and color controllable
- SPI controlled
- 50 pixels (6 LEDs per Pixel)
- Highest quality components and premium packaged 5050 SMD LEDs
- Thermally resistant 3M VHB adhesive for long lasting bond
- 120° beam angle
- 24V DC input voltage
- Can be cut every 4" (100 mm)
- Ambient temperature -4°F to 113°F (-20°C to 45°C)
- Thick double layer 3oz copper PCB for excellent thermal management
- Maximum run length: 32 ft (10 m)

Dimensions

IP20


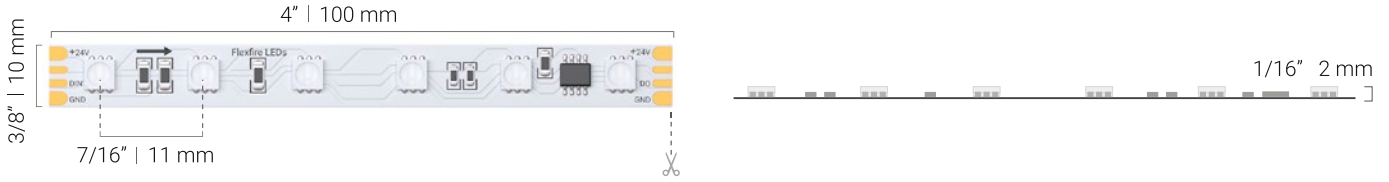


IP65

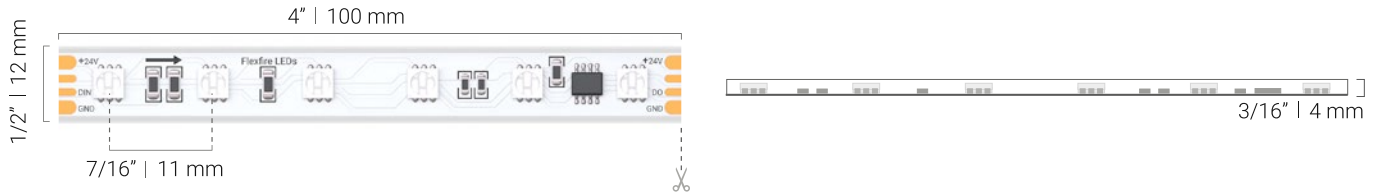





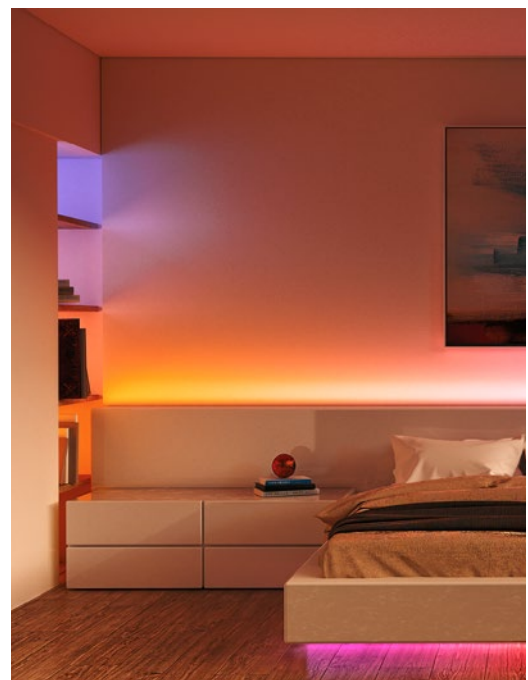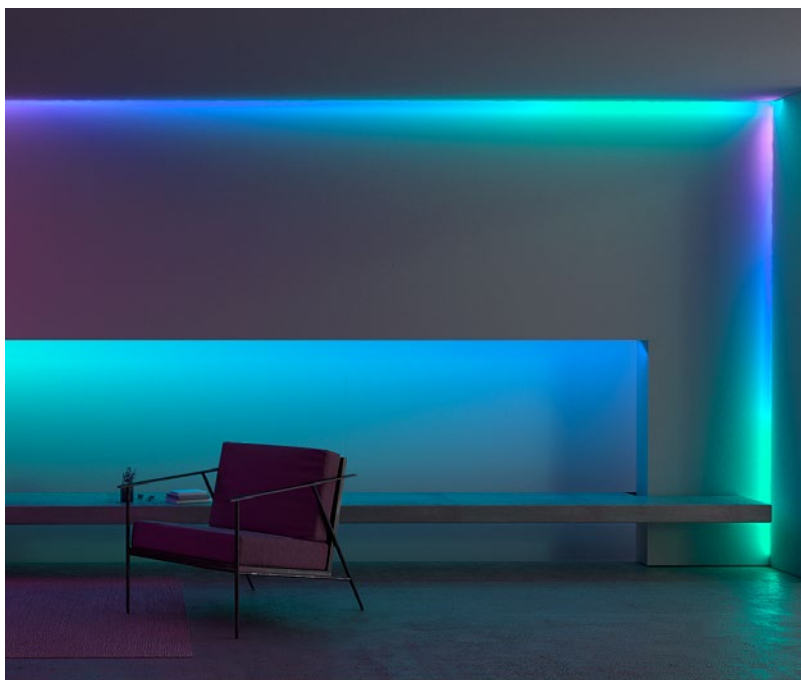







Specifications

Product SKU	LED Chips per Pixel	Voltage Input	Watts / foot (Meter)	Watts / Meter	Lumens / Foot	Lumens / Meter	Luminous Efficacy
CB-PXL-RGB	6	24V DC	3.65 W/ft	12 W	107 lm/ft	350 lm/m	29 lm/w



RGB Strips Comparison Chart

LED Strip	Color Temperatures (CCT)	Brightness	Lumens / ft	Watts / ft	Ingress Protection	CRI	Voltage	Max Run (in series)
RGB 150 Series	 RGB		N.A.	2.2	IP20 IP65	N.A.	24V	48 ft
RGB 300 Series	 RGB		N.A.	4.4	IP20 IP65	N.A.	12V 24V	16 ft 32 ft
RGB 600 Series	 RGB		~ 231	6.1	IP20 IP65	N.A.	24V	26 ft
RGBW Color Changing + White	 RGB + 3000K		~ 293	5.8	IP20 IP65	~ 93	24V	32 ft
RGB + Tunable White Series	 RGB + 24K - 65K		~ 260	5.5	IP20 IP65	~ 95	24V	23 ft
RGB Digital Pixel™ Series	 RGB Pixel		N.A.	3.6	IP20 IP65	N.A.	24V	32 ft



Project Gallery

RGB Color Changing



Backyard Lighting

Outdoor RGB 300 Series




Bar and Restaurant Lighting

RGB + Dynamic Tunable White Series



Bar and Restaurant Lighting

RGB 300 Series

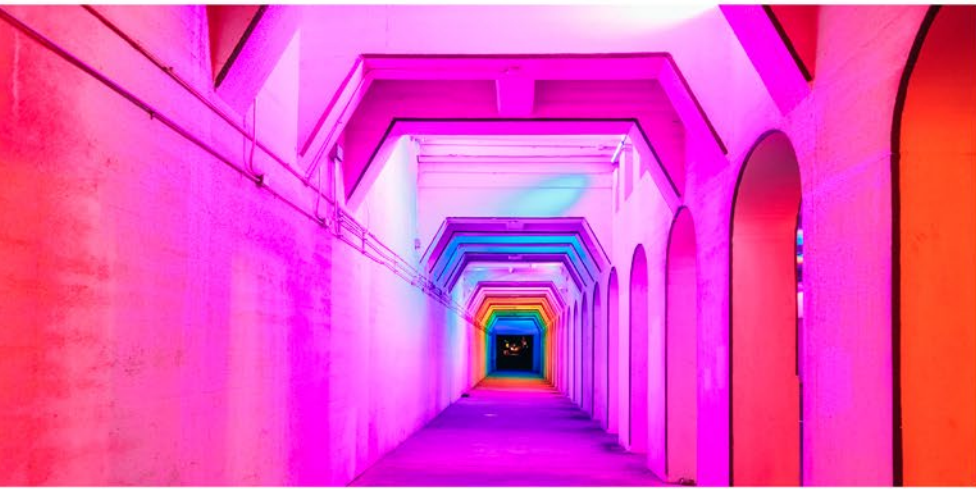

Single Color

LED STRIP LIGHTS



Vivid, high saturation accent lighting. Available in Red, Blue, Green, Amber & Ultraviolet (UV).





ColorBright™ Vivid Color Series

ColorBright™ Vivid Color LED strip lights are the perfect way to add a splash of beautiful colored lighting in compact places. The flexible design of LED strips allows for the addition of red, green, blue, or amber in practically any space.



Power:
3 W/ft (9.8 W/m)



Red:
630 nm



Amber:
593 nm



Green:
517 nm



Blue:
462 nm



ColorBright™ Ultraviolet Series


ColorBright™ Ultraviolet LED strip lights are linear UV LED chips mounted on a flexible strip of printed circuit board (PCB) with a strong adhesive backing. The flexible design of LED strips allows for the addition of UV light to basically any space.



Power:
3 W/ft (9.8 W/m)



UV-A:
390 - 400 nm

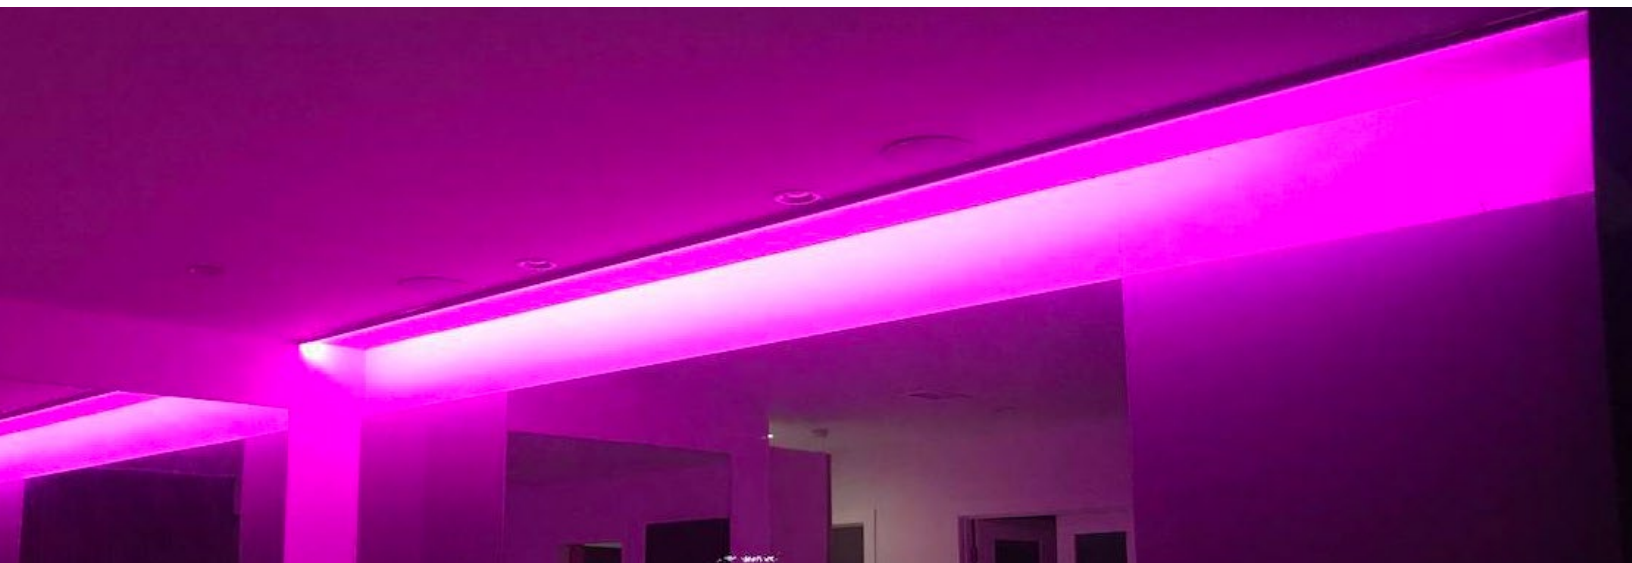

ColorBright™ Vivid Color Series

[> Visit Product Page](#)


15-year
warranty



Description

Our ColorBright™ Vivid Color LED Strip Lights offer exceptional color saturation and depth, ideal for projects requiring the full richness of specific hues. Available in red, green, blue, and amber, this sophisticated line of light's medium brightness is best suited for residential accent and cove lighting, as well as commercial applications like signage, displays, stage lighting, restaurant decoration, or edge light



Power:

3 W/ft (9.8 W/m)



Red:

630 nm



Amber:

593 nm



Green:

517 nm



Blue:

462 nm




Available IP Versions

Product Features

- High brightness output
- Fully dimmable
- Highest quality components and premium packaged 3528 LEDs
- Thermally resistant 3M VHB adhesive for long lasting bond
- 120° Beam Angle
- 24V DC input voltage
- Can be cut every 2" (50 mm)
- Ambient temperature -4°F to 113°F (-20°C to 45°C)
- Thick double layer 4oz copper PCB for excellent thermal management
- 36 LEDs/ft (120/m)
- Maximum length in series: 32 ft 10 in (10 m)

Dimensions

IP20

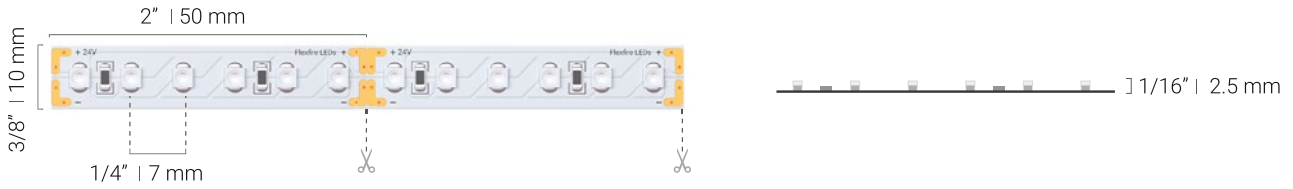


IP65



Specifications

Product SKU	Color (CCT)	Wavelength (nm)	Watts / Foot (Meter)	Lumin. Flux (Meter)	Luminous Efficacy (Lumens / Watt)
R	Red	630 nm	3 W/ft (9.8 W/m)	31 lm/ft (101 lm/m)	10 lm/W
G	Green	517 nm	3 W/ft (9.8 W/m)	177 lm/ft (581 l/m)	61 lm/W
B	Blue	462 nm	3 W/ft (9.8 W/m)	44 lm/ft (143 lm/m)	14 lm/W
A	Amber	641 nm	3 W/ft (9.8 W/m)	114 lm/ft (375 lm/m)	39 lm/W
ATS	Amber Turtle Safe	593 nm	3 W/ft (9.8 W/m)	67 lm/ft (221 lm/m)	22 lm/W

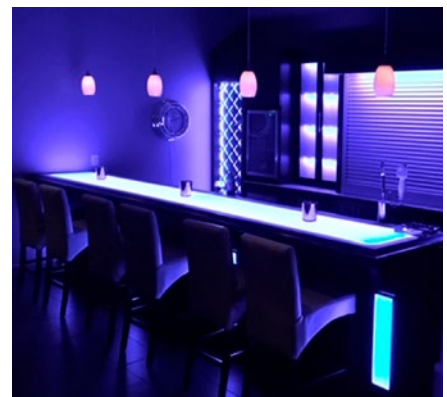

ColorBright™ Ultraviolet Series

[> Visit Product Page](#)


15-year
warranty



Description

Our ColorBright™ Ultraviolet LED Strip Lights provide high-quality, compact UV-A lighting. Similar to purple in hue, it is a great option for indirect decorative or accent lighting in homes and commercial locations like bars, entertainment venues, and clubs. It is also specially engineered for UV-responsive applications, such as luminous paint, germ detection, fishing, and even inspecting bills, equipment, or minerals.



Power:

3 W/ft (9.8 W/m)



UV-A:

390 - 400 nm



Available IP Versions

Product Features


- Fully dimmable
- Highest quality components and premium packaged 3528 LEDs
- Thermally resistant 3M VHB 4930 adhesive for long lasting bond
- 120° beam angle
- Efficacy up to 92 lm/W
- 24V DC input voltage
- Can be cut every 2" (50 mm)
- Ambient temperature -4°F to 113°F (-20°C to 45°C)
- Thick double layer 4oz copper PCB for excellent thermal management
- 36 LEDs/ft (120/m)
- Maximum length in series: 32 ft 10 in (10 m)

Dimensions






Specifications

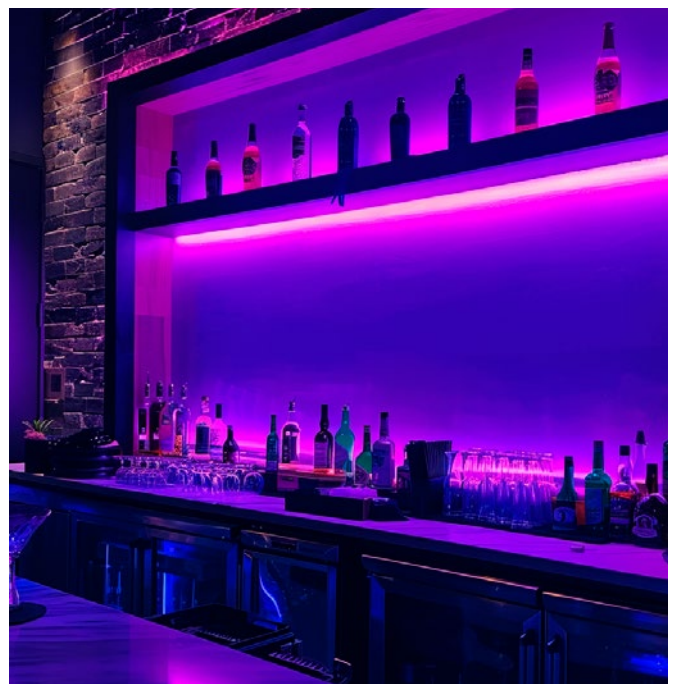Product SKU	Color (CCT)	Wavelength (nm)	Watts / Foot (Meter)	Irradiance
CB-UV	Ultraviolet	300 nm - 400 nm (peak wavelength at 399nm)	3 W/ft (9.8 W/m)	At 1 cm from the LED chip = 10 W/cm ²



Single Color Strips Comparison Chart



LED Strip	Colors	Brightness	Lumens / ft	Watts / ft	Lumens / Watt	Ingress Protection	Voltage	Max Run (in series)
 Vivid Color Red	Red (615 - 630 nm)		31	2.9	10	IP20 IP65	24V	32 ft
 Vivid Color Amber	Amber (596 nm)		263	2.9	91	IP20 IP65	24V	32 ft
 Vivid Color Green	Green (515 - 525 nm)		177	2.9	61	IP20 IP65	24V	32 ft
 Vivid Color Blue	Blue (465 - 475 nm)		44	2.9	14	IP20 IP65	24V	32 ft
 Ultraviolet 399 nm	UV (399 nm)		3	2.9	0.87	IP20	24V	32 ft



Lucid™

FLEXIBLE NEON LED STRIP LIGHTS

Side bending strip lights that emulate neon lighting. Available in RGB and white versions.





Lucid™ Flexible LED Neon Strip Light

Our Lucid™ LED Neon Strip Lights are ideal for accent applications, signs, wall lighting, landscape lighting, and areas where lighting is embedded into a surface; among many others. These strip lights emulate the effect of a neon light.



Power:
2.7 W/ft



Static White:
3000K or 5000K



Lucid™ RGB Flexible LED Neon Strip Light

Our Lucid™ RGB LED Neon Strip Lights create beautiful colors for accent applications. These strip lights emulate the effect of a neon light, creating a continuous, lustrous line of light, offering many improvements over traditional neon lighting.



Power:
2.7 W/ft



RGB:
Color Changing



Lucid™ Flexible LED Neon Strip Light



7-year warranty



[> Visit Product Page](#)

Description

Our Lucid™ LED Neon Strip Lights are ideal for accent applications, signs, wall lighting, landscape lighting, and areas where lighting is embedded into a surface; among many others. These strip lights emulate the effect of a neon light, creating a continuous, lustrous line of light, offering many improvements over traditional neon lighting. The IP65 rating means that the Lucid™ LED Neon Strip Lights are able to withstand jets and splashes of water from all sides. It cannot be submerged in water, but it will withstand the elements. We also recommend them for indoor use in high splash areas or if you're looking for a strip that is easier to clean.



Power:
2.7 W/ft



Static White:
3000K or 5000K



Side-Bending:
4¾" Maximum Bending Diameter



Fully Diffused:
Continuous Line of Light



Product Features



- Fully dimmable
- Up to 155 lm/ft (510 lm/m)
- Width (at the base): 3/8" (10 mm)
- Height: 7/8" (20 mm)
- Maximum lateral bending diameter: 4 3/4" (120 mm)
- 3014 LED chips
- 160° beam angle
- Efficacy up to 56 lm/W
- 24V DC input voltage
- Can be cut every 2" (50 mm)
- Ambient temperature: -4°F to 113°F (-20°C to 45°C)
- 50,000 hour lifespan (8 hours a day for 17 years)
- IP65 rated
- Maximum run length in series: 32 ft 10 in (10 m)

Dimensions



Specifications

Product SKU	Color (CCT)	Watts / Foot (Meter)	Lumen / Foot (Meter)	Luminous Efficacy (Lumens / Watt)	CRI	Gamut Score Rg (Color Sat.)	TLCI (Qa)	CQS
NEON-S-30K-24V-32FT	3000K	2.7 W/ft (9 W/m)	144 lm/ft (473 lm/m)	52 lm/W	83	94	75	85
NEON-S-50K-24V-32FT	5000K	2.7 W/ft (9 W/m)	155 lm/ft (510 lm/m)	56 lm/W	83	95	73	83

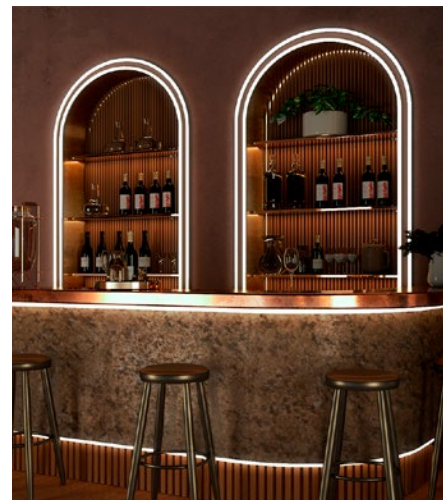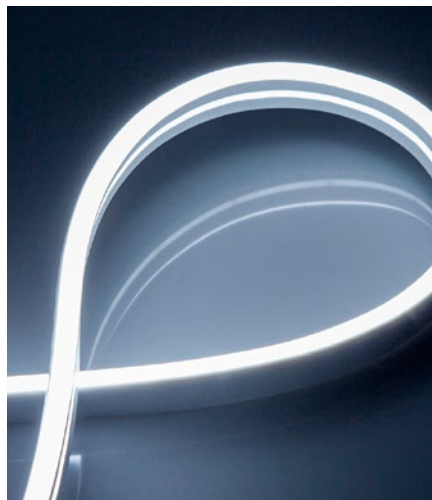

Lucid™ RGB Flexible LED Neon Strip Light



7-year
warranty



[> Visit Product Page](#)

Description

Our Lucid™ RGB LED Neon Strip Lights create beautiful colors for accent applications, signs, wall lighting, landscape lighting, and areas where lighting is embedded into a surface; among many others. These strip lights emulate the effect of a neon light, creating a continuous, lustrous line of light, offering many improvements over traditional neon lighting. The IP65 rating means that the Lucid™ RGB LED Neon Strip Lights are able to withstand jets and splashes of water from all sides. They cannot be submerged in water, but will withstand the elements. We also recommend them for indoor use in high splash areas or if you're looking for a strip that is easier to clean.



Power:
2.7 W/ft



RGB:
Color Changing



Side-Bending:
4¾" Maximum Bending Diameter



Fully Diffused:
Continuous Line of Light



Product Features



- Fully dimmable and color controllable
- Up to 42 lm/ft (138 lm/m)
- Width (at the base): 3/8" (10 mm)
- Height: 7/8" (20 mm)
- Maximum lateral bending diameter: 4 3/4" (120 mm)
- 3014 LED chips
- 160° beam angle
- Efficacy up to 13.8 lm/W
- 24V DC input voltage
- Can be cut every 2" (50 mm)
- Ambient temperature: -4°F to 113°F (-20°C to 45°C)
- 50,000 hour lifespan (8 hours a day for 17 years)
- IP65 rated
- Maximum run length in series: 32 ft 10 in (10 m)

Dimensions



Specifications

Product SKU	Color (CCT)	Watts / Foot (Meter)	Lumen / Foot (Meter)	Wavelengths	Max Run Length in Series
NEON-S-RGB-24V-32FT	RGB	2.7 W/ft	42 lm/ft (138 lm/m)	R: 620-630 nm G: 520-530 nm B: 460-470 nm	32' 10" (10 m)

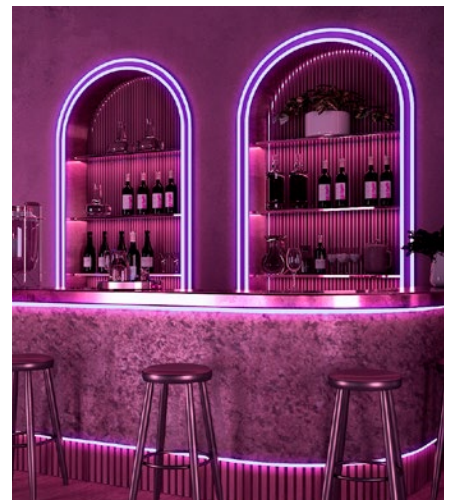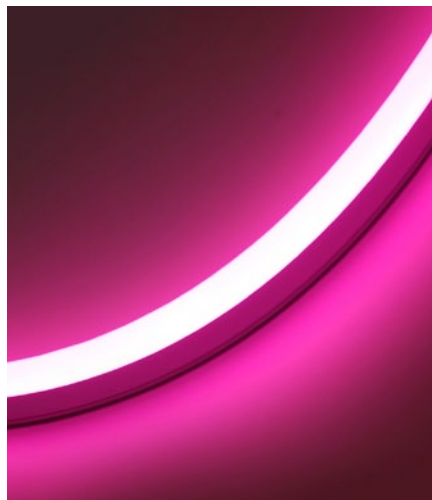

Valor™

IP67 PREMIER DIFFUSION SERIES

The highest output outdoor LED strip light option that provides clean and continuous lines of light.



Valor™ IP67 Premier Diffusion Series

[> Visit Product Page](#)


7-year
warranty



Description

The Valor™ Premier Diffusion Series LED Strip Light is ideal for applications needing bright, fully-diffused lighting, or high-output lighting in outdoor settings, such as commercial projects, hallways, outdoor coves, and outdoor corridors, among other architectural projects. Its 93 LED chips per meter and its silicone sleeve are combined to offer full diffusion and a beautiful seamless line of light. It also offers optimal light quality, with a CRI over 90 and a low profile form factor.



Lumen Output:

Up to 805 lm/ft (2,642 lm/m)



Power:

7.3 W/ft (24 W/m)



Static White:

3000K or 5000K



Fully Diffused:


Continuous Line of Light



Product Features

- High CRI up to 94
- Up to 805 lm/ft (2,642 lm/m)
- Fully dimmable
- Highest quality components and premium packaged 2835 LEDs
- Single bin LED selection to ensure color consistency (3-Step MacAdam)
- Thermally resistant 3M GL 9495 adhesive for long lasting bond
- 120° beam angle
- Efficacy up to 119 lm/W
- 24V DC input voltage
- Can be cut every 1" (25 mm)
- Ambient temperature: -4°F to 113°F (-20°C to 45°C)
- 93 LEDs/ft (308 LEDs/m)
- Maximum run length in series: 16 ft (5 m)

Dimensions

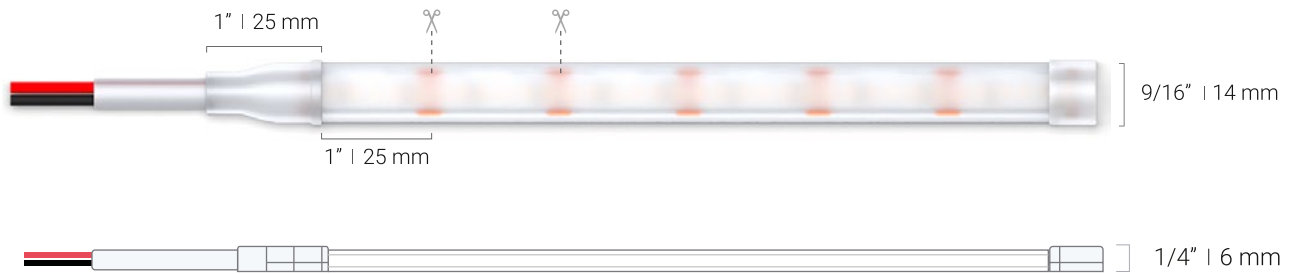

Specifications

Product SKU	Color (CCT)	Watts / Foot (Meter)	Lumen / Foot (Meter)	Luminous Efficacy (Lumens / Watt)	CRI	Gamut Score Rg (Color Sat.)	Relative Fidelity Score (RF)	TLCI (Qa)	CQS
IP67-UB-VA-30K	3000K	7.3 W/ft 24 W/m	750 lm/ft (2,460 lm/m)	110 lm/W	94	99	92	95	93
IP67-UB-VA-50K	5000K	7.3 W/ft 24 W/m	805 lm/ft (2,642 lm/m)	119 lm/W	94	98	90	95	91



Light Sheets

WHITE LED SHEETS

Thin and flexible sheets that incorporate LEDs to produce bright, even illumination across its surface.



White Light Sheets



5-year
warranty



[> Visit Product Page](#)

Description

Flexfire LED Light Sheets are thin and flexible sheets that incorporate LEDs to produce bright, even illumination across their surface. They lend themselves to creative designs while ensuring low maintenance and cost-effectiveness thanks to their multiple cut points across the entire sheet. They can be cut vertically, horizontally, or even diagonally to create different shapes and accommodate your specific project needs.

Their high brightness at around 3,000 lumens per sheet and great Color Rendering Index (CRI) of 93 deliver clean and bright illumination that elevates any space, making the Flexfire LED Light Sheets an ideal solution for a wide range of installations. From illuminating architectural features and retail displays to enhancing hospitality spaces and interior design, these serve as the perfect choice for captivating lighting solutions in a wide array of projects.



Lumen Output:
3,064 lm/sheet



Power:
29 Watts/sheet



Color Temperatures:
30K, 50K




Daisy-Chain
up to 6 Sheets

IP20

Product Features

- High CRI up to 94
- Up to 3,064 lm/sheet
- Fully dimmable
- Highest quality components and premium packaged 2835 LEDs
- Single bin LED selection to ensure color consistency (3-Step MacAdam)
- Thermally resistant 3M LSE 9495 adhesive for long lasting bond
- 120° beam angle
- Efficacy up to 103 lm/W
- Width: 9 7/16" (240 mm)
- Height: 18 7/8" (480 mm)
- 24V DC input voltage
- Can be cut every 13/16" (20 mm)
- Ambient temperature: -4°F to 113°F (-20°C to 45°C)
- 28 LEDs/sheet
- Maximum run length in series: Up to 6 sheets

Dimensions

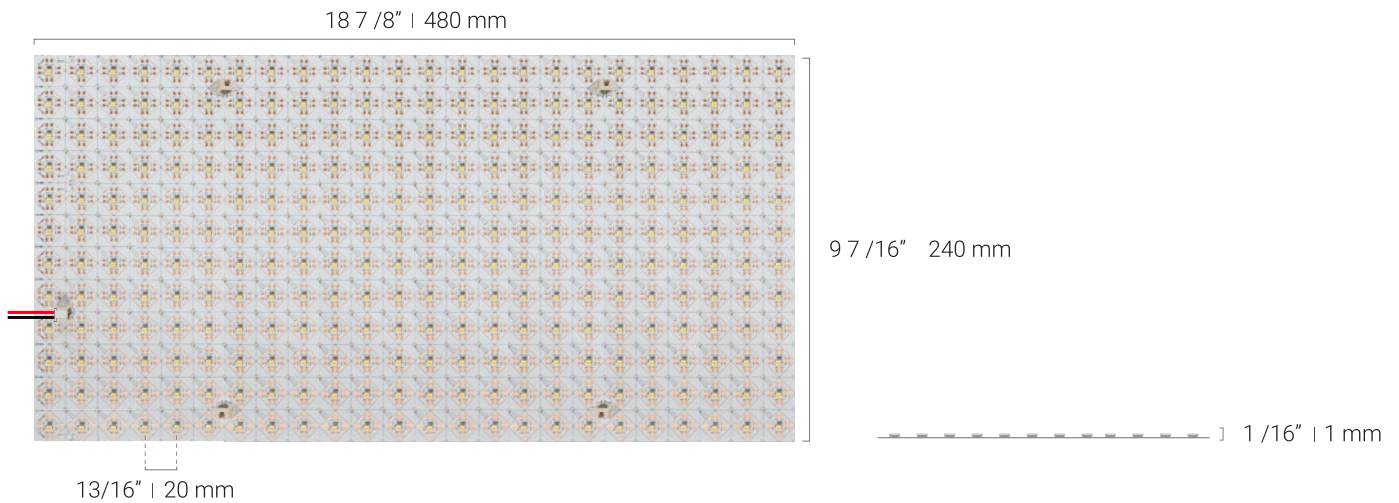

Specifications

Product SKU	Color (CCT)	Lumen / Foot (Meter)	Luminous Efficacy	CRI	Gamut Score Rg (Color Sat.)	Relative Fidelity Score (RF)	TLCI (Qa)
LST-30K	3000K	2940 lm	98 lm/W	93	99	90	94
LST-50K	5000K	3064 lm	103 lm/W	94	98	88	96



Sign Modules

WHITE & RGB LED
SIGN MODULES



Conquer any curve with ease with our RGB and White LED Sign Modules and redefine what's possible in signage lighting.



White Sign Modules

Our White Sign Modules are ideal for accent, sign, and non-linear applications with curves and turns. These Sign Modules are also IP65-rated for outdoor or wet location areas.



Power:
0.72 W/module



Static White:
3000K or 5000K



RGB Sign Modules


Our RGB Sign Modules are ideal for accent, sign, and non-linear applications with curves and turns. These modules are also able to produce millions of colors when paired with a compatible control method.



Power:
0.72 W/module



RGB:
Color Changing

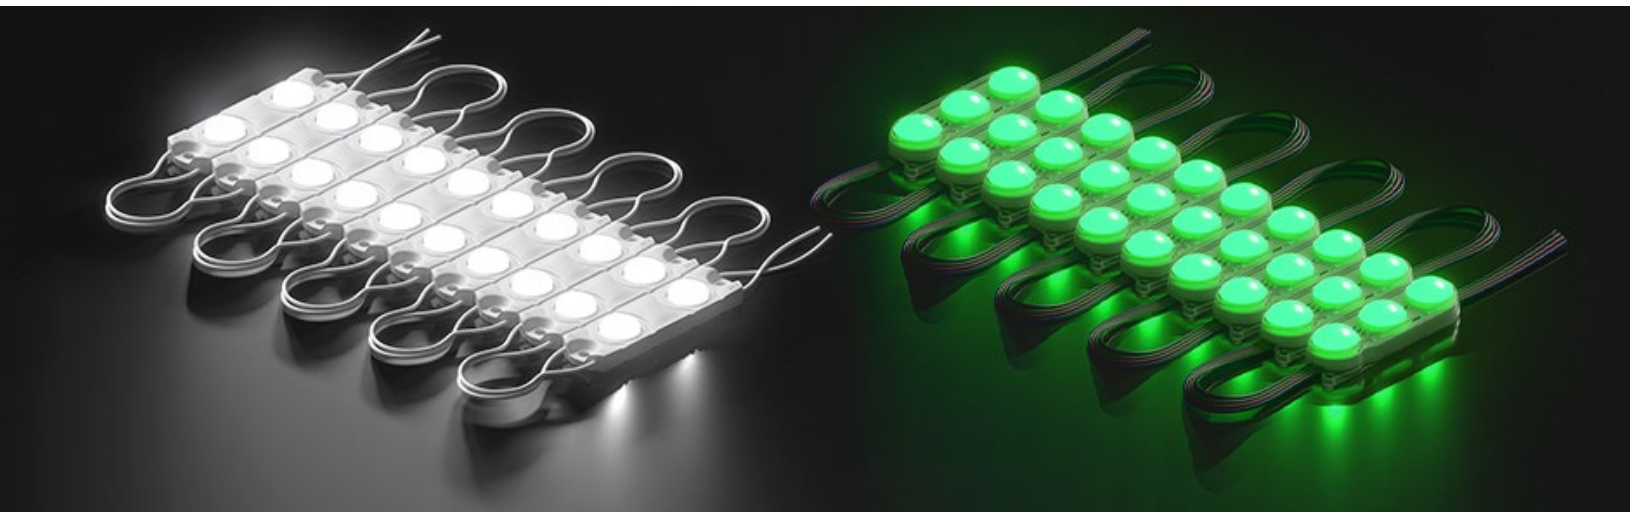

White LED Sign Modules



3-year
warranty



[> Visit Product Page](#)

Description

Discover the perfect lighting solution with our White LED Sign Modules, available in 3000K and 6500K color temperatures. These versatile modules offer the flexibility to create warm and inviting atmospheres or bright and refreshing environments. With their energy-efficient design, you can enjoy cost savings while benefiting from their long-lasting performance.

Suitable for a wide range of applications, these LED modules are ideal for architectural accent lighting, retail displays, hospitality spaces, and signage installations. Easily customize the length of your chain of modules, adjust your lighting to different shapes, and achieve your vision effortlessly with our White LED Modules, making them an excellent choice for various lighting projects.



Lumen Output:
104 lm/module



Power:
0.72 Watts/module



Color Temperatures:
30K, 65K



Daisy-Chain
up to 50 Modules




IP67

Product Features

- High CRI up to 86
- Up to 104 lm/module
- Fully dimmable
- Highest quality components and premium packaged 2835 LEDs
- Single bin LED selection to ensure color consistency (3-Step MacAdam)
- Thermally resistant adhesive for long lasting bond
- 170° beam angle
- Efficacy up to 130 lm/W
- Width: 11/16" (18 mm)
- Length: 2 3/8" (60 mm)
- 24V DC input voltage
- Ambient temperature: -4°F to 113°F (-20°C to 45°C)
- 2 LEDs/module
- Maximum run length in series: Up to 50 modules

Dimensions

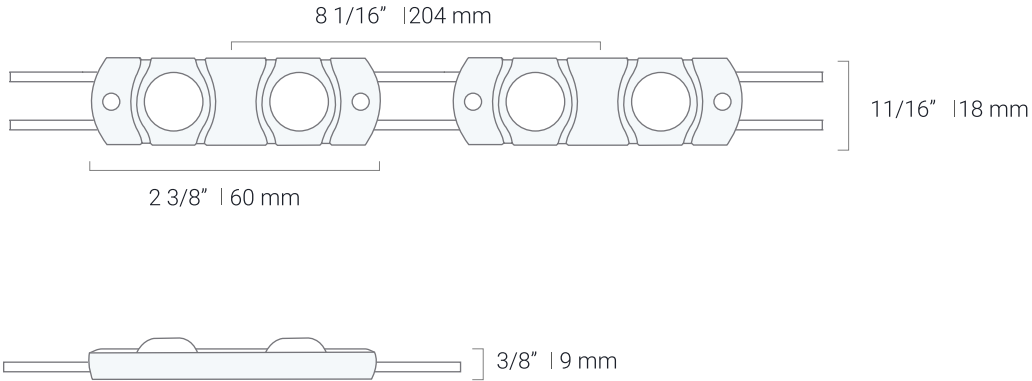

Specifications

Product SKU	Color (CCT)	Lumen / Foot (Meter)	Luminous Efficacy	CRI	Gamut Score Rg (Color Sat.)	Relative Fidelity Score (RF)	TLCI (Qa)
MOD-30K	3000K	100 lm	126 lm/W	85	96	85	73
MOD-65K	6500K	104 lm	130 lm/W	86	93	81	76



RGB Sign Modules



3-year
warranty



[> Visit Product Page](#)

Description

Experience a world of vibrant possibilities with our RGB LED Sign Modules, designed to infuse any space with captivating and dynamic lighting effects. With the ability to display a wide spectrum of colors, these modules offer unparalleled creative potential for your lighting projects. With their energy-efficient design, these RGB modules ensure both stunning visual displays and cost savings.

Suitable for a wide range of applications, these LED modules are ideal for architectural accent lighting, entertainment venues, and signage installations. Easily customize the length of modules, adjust your lighting to different shapes, and unlock limitless creativity and visual excitement with our RGB LED Modules.

The pack comes with 40 modules and each module has adhesive backing and screw holes (no screws included) for ease of installation.



RGB:

Color Changing



Power:

0.72 Watts/module



Beam Angle:

160



Daisy-Chain

up to 40 Modules




IP67

Product Features

- Up to 25 lm/module
- Fully dimmable
- Highest quality components and premium packaged 5050 LEDs
- Thermally resistant adhesive for long lasting bond
- 160° beam angle
- Width: 7/8" (22 mm)
- Height: 2 5/8" (66 mm)
- 12V DC input voltage
- Ambient temperature: -4°F to 113°F (-20°C to 45°C)
- 3 LEDs/module
- Maximum run length in series: Up to 40 modules

Dimensions

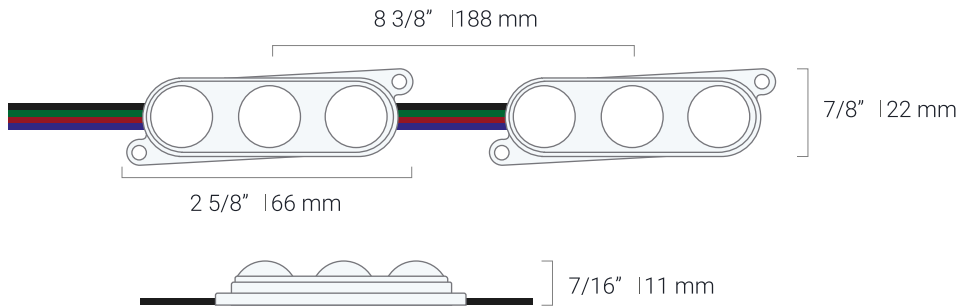

Specifications

Product SKU	Color (CCT)	Watts / Foot (Meter)	Lumen / Foot (Meter)	Luminous Efficacy	Color Wavelengths
MOD-RGB-12V-40	RGB	0.72W	25 lm	35 lm/W	R: 620-625 nm G: 520-525 nm B: 465-470 nm



ClickBright™

LINKABLE LED LIGHT BARS

The perfect lighting solution for anyone wanting a quick and easy, high-quality installation option.



ClickBright™ LED Light Bars



5-year
warranty



[> Visit Product Page](#)

Description

ClickBright™ Light Bars provide a simple and effective lighting solution perfect for projects requiring a mid-output light versatile enough to work as task lighting and accent lighting. These bars can be linked up to 16 feet continuously or 10 connections. The cover on these bars guarantees a smooth, spotless line of light that can also be dimmed as needed. These bars are lightweight yet durable and have a 5-year warranty.

Easy Set Up in Minutes



Click



Bright



That's it!



Lumen Output:

493 lm in 1 ft
917 lm in 2 ft



Power:

4.3 W in 1 ft
8.6 W in 2 ft



Color Temperatures:


27K, 30K, 35K, 40K, 50K

IP20

Product Features

- Bars available in 1ft (30 cm) or 2ft (58 cm)
- High CRI up to 98
- High TLCI up to 98
- Efficacy up to 104 lm/W
- 24V DC input
- 4014 SMD chips
- 48 LEDs per foot
- IP20 indoor-rated
- Width: ½" (12.6 mm) / Height: ⅜" (10 mm)
- 50,000 hour lifespan (8 hours/day for 17 years)
- Operating temperature: -4°F to 104°F (-20°C to 40°C)
- 120° beam angle

Dimensions

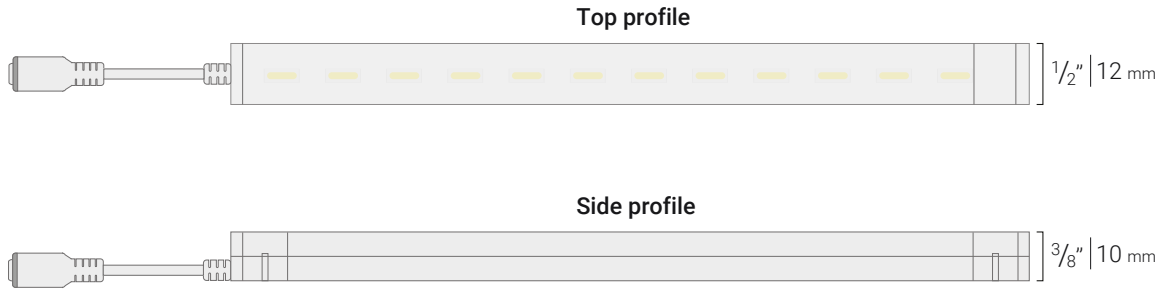

Specifications

Product SKU	Color (CCT)	Fixture Length	Watts / Fixture	Lumens / Fixture	Luminous Efficacy (Lumens / Watt)	CRI	Gamut Score Rg (Color Sat.)	Relative Fidelity Score (RF)	TLCI (Qa)	CQS
CLK-01-27K	2700K	1ft (30cm)	4.3 W/fixture	416 lm/fixture	83 lm/W	98	100	95	98	98
		2ft (58cm)	8.6 W/fixture	735 lm/fixture	81 lm/W	94	99	92	94	94
CLK-01-30K	3000K	1ft (30cm)	4.3 W/fixture	404 lm/fixture	90 lm/W	94	98	92	94	94
		2ft (58cm)	8.6 W/fixture	856 lm/fixture	93 lm/W	96	98	91	97	94
CLK-01-35K	3500K	1ft (30cm)	4.3 W/fixture	478 lm/fixture	105 lm/W	95	98	91	97	93
		2ft (58cm)	8.6 W/fixture	917 lm/fixture	105 lm/W	98	100	95	98	98
CLK-01-40K	4000K	1ft (30cm)	4.3 W/fixture	446 lm/fixture	96 lm/W	94	99	92	94	94
		2ft (58cm)	8.6 W/fixture	870 lm/fixture	97 lm/W	94	98	92	94	94
CLK-01-50K	5000K	1ft (30cm)	4.3 W/fixture	493 lm/fixture	103 lm/W	96	98	91	97	94
		2ft (58cm)	8.6 W/fixture	900 lm/fixture	104 lm/W	95	98	91	97	93



Endeavor™

120V COVE FIXTURE

With rotating mounting clips and selectable CCT the Endeavor™ is a versatile lighting fixture that is able to run long distances thanks to its input voltage of 120V AC.

Endeavor™ 120V Cove Fixture



5-year
warranty



[> Visit Product Page](#)

Description

The Endeavor™ 120V Cove Fixture features rotating mounting clips which makes it ideal for several types of spaces where you want to be able to throw your light at the perfect angle. The selectable CCT feature on the side of the fixture allows you to choose between three different shades of white to ensure that you are able to purchase multiple fixtures at once while still having the right light for any job site.

Because this fixture runs off of 120V AC power, it is able to run long distances and can be chained together for up to 300W of continuous bars before experiencing any kind of voltage drop. Its easy installation lends itself to work well in retrofit applications that may have previously housed linear fluorescent lighting.



Lumen Output:

1,043 lm in 1 ft

1,960 lm in 2 ft



Power:

10 W in 1 ft

20 W in 2 ft



Selectable White:

Can be set to

30K, 35K & 40K



Premium Diffusion:

Continuous

Line of Light

IP20

Product Features

- Fixtures available in 1 ft (30 cm) or 2 ft (58 cm)
- High CRI up to 93
- Fully dimmable
- 120° beam angle
- Width: 1" (28 mm)
- Height: 1" (25 mm)
- Efficacy up to 104 lm/W
- 120V AC input voltage / 50~60 Hz
- Ambient temperature: -4°F to 122°F (-20°C to 50°C)
- Maximum run length: 300W chained (~30 ft of fixtures)

Dimensions

Top profile



Side profile



Specifications

Product SKU	Lumens / Fixture	Watts / Fixture	Luminous Efficacy (Lumens / Watt)	CRI	Gamut Score Rg (Color Sat.)	Relative Fidelity Score (RF)
END-MULTI-120V-01FT	Up to 1043	10W	Up to 104 lm/W	93	98	92
END-MULTI-120V-02FT	Up to 1960	20W	Up to 98 lm/W	94	98	92



Victory™

LED PUCK LIGHTS

Round, compact fixtures that emit a single point of bright light. Perfect for applications requiring accent or task lighting with great color rendering.

Victory™ LED Puck Lights



5-year
warranty



[> Visit Product Page](#)

Description

The Victory™ LED Puck Lights are round, compact fixtures that emit a single point of bright light. They are perfect for applications requiring accent or task lighting with great color rendering. Each puck light can be installed directly on a surface or recessed into cabinets or shelves.

There are two available color temperatures, Warm White (3000K) and Natural White (4000K), so you can match them to your favorite lighting fixtures. Thanks to their condensed illumination range, you can use them to highlight objects or decorations in an area or to enhance the overall look of a space by adding layers of light and focus points.

The Victory™ LED Puck Lights are fully dimmable and can be daisy chained up to 7 fixtures in a continuous run. They are low profile, very lightweight, and have a 5-year warranty.



Lumen Output:
260 lm/puck



Power:
3.2 Watts/puck



Color Temperatures:
30K, 40K




**Daisy-Chain
up to 7 Pucks**

IP20

Product Features

- High CRI up to 95
- Fully dimmable
- 120° beam angle
- Diameter: 2 1/2" (63 mm)
- Height: 1/2" (12 mm)
- Efficacy up to 65 lm/W
- 12V DC input voltage
- Ambient temperature: -4°F to 104°F (-20°C to 40°C)
- Able to chain up to 7 pucks

Dimensions

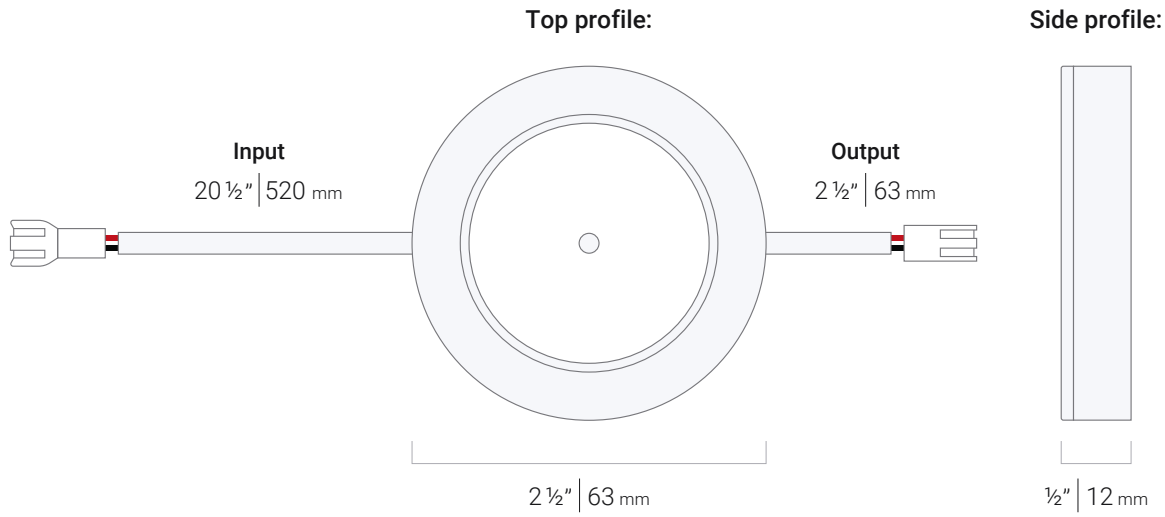

Specifications

Product SKU	Color (CCT)	Lumens / Fixture	Luminous Efficacy	CRI	Gamut Score Rg (Color Sat.)	Relative Fidelity Score (RF)	TLCI (Qa)
VIC-R-30K-S-12V	3000K	240	60 lm/W	95	103	93	93
VIC-R-40K-S-12V	4000K	260	65 lm/W	92	97	90	91



LED LIGHTING

Accessories



Aluminum Mounting Channels

Flexfire LEDs Mounting Channels are designed to ensure that your strip light lives a long life. By acting as a heat sink and providing a barrier from dust and debris, aluminum channels can extend the life of your strip light while also making maintenance simple. The channels are sold in one-meter and two-meter pieces and can be mounted on practically any flat surface to give your project the finished look it deserves. We've packaged all components into a kit to include: channel, lens, mounting clips, end caps, and other accessories.

Benefits of Using Aluminum Channels:



Stylish and Finished Look



Protection from Debris and Dust









Excellent Heat Management



Longer Lifespan of Strip Light

Features

Channel Material	Aluminum
Color	Anodized aluminum finish
Mounting Clip Material	Stainless steel
End Cap Material	PVC
Lens Material	Polycarbonate
Field Cuttable	Yes
Warranty	6-years
Environmental	Suitable for dry/damp location use
Mounting Options	 Surface Mount  Angled Mount  Recessed Mount
Diffusion Covers	 Clear  Frosted  Opal

Name	Type	Included Accessories	Covers	Length	Mockup
Ion™	Heat Sink	No Additional Accessories	Not applicable	1M channel available	
Gemini™	Surface Mount	2 Open End Caps 2 Closed End Caps 4 Mounting Clips	Clear Cover Frosted Cover Matte Cover	1M and 2M* channel kits available	
Kepler™	Surface Mount	2 Open End Caps 2 Closed End Caps 4 Mounting Clips	Clear Cover Frosted Cover Matte Cover	1M channel kits available	
Laika™	Surface Mount	2 Open End Caps 2 Closed End Caps 4 Mounting Clips	Clear Cover Frosted Cover	1M and 2M* channel kits available	
Titan™	Surface Mount	2 Open End Caps 2 Closed End Caps 4 Mounting Clips 6 Channel Connectors	Clear Cover Frosted Cover Matte Cover	1M and 2M* channel kits available	
Atlas™	Angled Mount	2 Open End Caps 2 Closed End Caps 4 Mounting Clips	Clear Cover Frosted Cover Matte Cover	1M and 2M* channel kits available	
Calypso™	Recessed Mount	2 Open End Caps 2 Closed End Caps 4 Mounting Clips 6 Channel Connectors	Frosted Cover Matte Cover	1M and 2M* channel kits available	
Cassini™	Recessed Mount	2 Open End Caps 2 Closed End Caps 4 Mounting Clips	Clear Cover Frosted Cover Matte Cover	1M and 2M* channel kits available	

*only available with frosted/matte covers.

Power Supplies

Zurik® Universal Dimmable Driver

The Zurik® Universal Dimmable Driver is the ultimate power supply for flawless dimming capabilities in any type of project. Offering a wide voltage input range, it is compatible with a large variety of AC wall dimmers and controllers. These drivers can even act as their own junction boxes and are IP66-rated for reliable, long-lasting use.



7-year
warranty



Dimming	TRIAC, MLV, ELV, 0-10V, 1-10V, Potentiometer, 10V PWM	Working Humidity	20 ~ 90%RH. Non Condensing
Efficiency	Up to 92%	Temp Coefficient	0.03%/°C [32°F ~ 122°F (0 ~ 50°C)]
Power Factor	Up to 0.99	Load Regulation	1%
Cooling By	Free air convection	Isolation Resistance	I/P-O/P:100MΩ/500VD-C/25°C/70%RH
Voltage Tolerance	0.5 V	EMC Emission	FCC Part 15B
Voltage Regulation	0.5%	PWM Frequency	400Hz
Dimming Range	0-100%	Ingress Protection	IP66
Deration Recommendation	80%	Protection	Against Short Circuit, Overloads, and Overheating
Minimum Load	10%	Overloading	≤120%
Frequency Range	47-63 Hz	Overheating	212°F, 18°F (100°C, 10°C) Driver shuts down when these limits are exceeded
THD (Typ)	<20%	Short Circuit	Shuts down output voltage. Re-powers on to recover after the fault condition is removed.
Working Temperature	-40°F ~ 140°F (-40°C ~ 60°C)		

Mean Well™ HLG Driver



7-year warranty



Mean Well™ power supplies are well-known in the industry for being a highly reliable and low-cost way to deliver power to your low voltage lighting systems. Built to last, the HLG series can be used with a variety of single-color output, color-changing, and tunable white LED lighting products. The Mean Well™ HLG series is IP65 rated, has an adjustable voltage and current option, and is protected against short-circuiting.



Features

- Electronic technology
- Up to 90% efficiency
- No knock-out holes
- Non-dimmable
- IP65 outdoor rated
- Automatic reset
- Type A: IP65, adjustable output voltage and constant current level
- Universal AC input / Full range (90 ~ 305VAC)
- Ambient temperature of -40°F to 158°F (-40°C to 70°C)
- Withstand 4kV surge, built-in active PFC function
- UL / CUL / TUV / PSE / CE certified
- Type "HL" LED drivers for use in Class I, Division 2 hazardous (Classified) location luminaires
- Suitable for LED street lighting, outdoor LED lighting, and general outdoor applications with high IP requirement
- No primary breaker (AC) or secondary breaker (DC)
- Output voltage and constant current ranges can be adjusted manually. Access the tuning ports by removing the rubber stopper.

Mean Well™ LPV Driver



2-year warranty



Mean Well™ power supplies are well known in the industry for being a highly reliable and low-cost way to deliver power to your low voltage lighting systems. Built to last, the LPV series can be used with a variety of single color output, color changing, and tunable white LED lighting products. The Mean Well™ LPV series is IP67 waterproof rated, and is protected against short-circuiting.



Features

- Electronic technology
- Load capacity up to 90%
- Withstand 300VAC surge input for 5 seconds (LPV/C-20/35/60/100)
- Automatic reset
- No knock-out holes
- Slim PFC plastic casing
- Ambient temperature of -30~+70°C
- Universal AC input / full range (up to 264 VAC)
- Non-dimmable; not compatible with AC in AC out dimmers such as Lutron, Legrand, Leviton dimmers
- IP67. For indoor or outdoor use without direct sunlight exposure
- Compatible with all Flexfire LED Strip Lights
- Recommended to be installed in a well ventilated area
- UL / CUL / TUV / PSE / CE certified
- No primary breaker (AC) or secondary breaker (DC)

Other Accessories

Flexfire LEDs offer you all the necessary components to help you achieve your project just like you envisioned. Contact us, and one of our dedicated project designers will help you create a list of product materials that include all of the components needed to achieve your lighting goals.

Controllers and Dimmers


Handheld remotes, wall dimmers, DMX controllers, and even smart home controllers compatible with Google Home or Amazon Alexa. You name it, we have the perfect solution for your project!



Handheld Remotes



Wall Dimmers

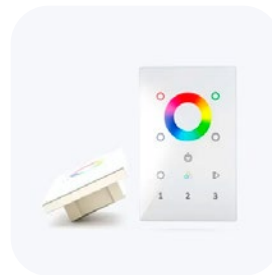

DMX Control
Systems



Smart Home
Controllers


Connectors



Solderless Connectors



Wet Location
Solderless Connectors

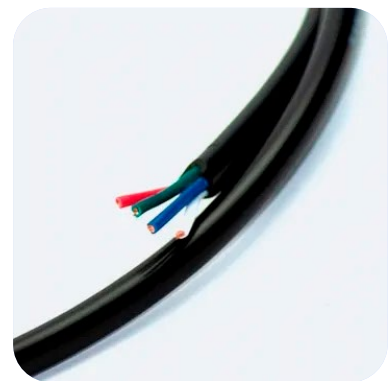

Extra Wire

Wire

Glossary

AC (Alternating Current) - This is the electricity that is used in most homes and commercial spaces. It's often referred to as line voltage and number differs from country to country. US line voltage is typically 90V-220V, whereas it often averages higher in Europe.

CCT - Not all white light appears the same. Correlated Color Temperature (CCT) defines the color appearance of a white light. CCT is defined in degrees Kelvin. Most white lights fall in a spectrum between 1800K and 6500K. When falling below 3000K, the light looks noticeably warmer like a candle. On the other end of the spectrum, the lights have a bluish tint and cooler tone when passing above 6500K. Some color temperatures will better suit your design than others. Choose complementary highlighting tones and look at example photos to find which you feel will look the best.

Chip Size - LED chips are all not all equal. What is the difference between 3528, 3014, and 5050 LEDs? The four digits represent the size of the chips in millimeters. For example, the 3528 chip is 3.5 mm x 2.8mm. Some chips are brighter than others and some have special uses and restrictions.

CQS - Color Quality Scale is an alternative to the unsaturated CRI measurement colors. There are 15 highly-saturated colors that are used to compare chromatic discrimination, human preference, and color rendering.

CRI (Color Rendering Index) - is the measurement of how colors look under a light source when compared with sunlight. Having information on the CRI of an LED strip light is important because you want to make sure that colors are being accurately represented by the light source.

DC (Direct Current) - Most LED strips on the market use low-voltage DC. An LED driver is required to step-down the AC voltage to a suitable level for the LED strips, which is normally 12V or 24V DC.

IP Rating - This is a rating system that defines the ability of a product to be able to work in different environments. IP is an acronym for "Ingress Protection". It is a measurement of the protection an item will have against solid objects (dust, sand, dirt, etc.) and liquids.

IP Rating

- *IP20* - No protection against water. Do NOT submerge IP20 LED lights. These are not waterproof.
- *IP65* - Water resistant. Protected against water jets from any angle.
Do NOT submerge IP65 LED lights. These are not waterproof.
- *IP67* - Water resistant plus. Protected against the events of temporary submersion (10 minutes).
Do NOT submerge IP67 LED lights for extended periods, these are not fully waterproof.
- *IP68* - Waterproof. Protected against the events of permanent submersion up to 3 meters.

LED - A Light Emitting Diode (LED) is a solid-state semiconductor device that converts electrical energy directly into light.

LED Binning - Simply put, binning is the process of grouping LEDs during production so that they match with LEDs of the same color sector. For consistent light and color output, we make sure that the LEDs are always ordered from the same bin.

LED Pitch - The distance between the individual chips on a strip. It is absolutely crucial to understand the importance that pitch plays in your project. The shorter the pitch, the more uniform the light tends to be and the less spotting tends to happen.

Lumens (lm) - A lumen is a measurement of lighting that represents the visible light output of a light source. We are all accustomed to using watts to measure the brightness of light, because of incandescent lighting. Today, we use lumens. Lumens are the most important variable when choosing your strip light. The higher the number, the brighter the light will be. Ensure that the strips you choose are bright enough for your application's intention.

Luminous Efficacy - This is calculated by measuring the lumen output and then dividing that number by watts. For example, a strip that has a lumen output of 300lm/ft and a wattage draw of 3w/ft has an efficiency of 100lm/W.

Solid-state Lighting - Lighting devices that do not contain moving parts or parts that can break, rupture, shatter, leak, or contaminate the environment. LEDs do not use electrical filaments or gasses to produce light.

TM-30 - The *Fidelity Index* measures how closely the observed light can render colors like the sun, using 99 color samples. The *Gamut Index* measures how saturated or desaturated colors are (aka how intense the colors are). The *Color Vector Graphic* measures which colors are saturated/desaturated and whether there is a hue shift in any of the 16 color bins.



FLEXFIRELEDS

If you are a contractor, electrician, OEM, distributor,
or designer, join our Partner Program and get:



Discounted pricing



FREE product samples



Expert lighting advice



Fast quoting



First access to NEW products

Toll Free Number:
1-844-353-9347



Local Number:
(925) 273-9080



www.flexfireleds.com



support@flexfireleds.com

Flexfire LEDs, Inc. 3554 Business Park Dr, Suite F. Costa Mesa, CA 92626