


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:24.00V I:0.2690A P:6.456W PF:1.000 Lamp Flux:493.748x1 lm		
NAME: LB-TW3050K	TYPE: LED Light Bar	WEIGHT:
SPEC: 6.5W	DIM.: 500*16.5*12.5 (MM)	SERIAL No.: 001
MFR.: Flexfire LEDs, Inc.	SUR.:0.488*0.02	PROTECTION ANGLE: 120

DATA OF LAMP		PHOTOMETRIC DATA Eff: 76.48 lm/W			
MODEL	LB-TW3050K-24V-20IN	I _{max} (cd)	149.0	S/MH(C0/180)	1.26
NOMINAL POWER(W)	0	LOR(%)	100.0	S/MH(C90/270)	1.20
RATED VOLTAGE(V)	0	TOTAL FLUX(lm)	493.75	η UP,DN(C0-180)	3.3,45.0
NOMINAL FLUX(lm)	493.748	CIE CLASS	DIRECT	η UP,DN(C180-360)	3.5,48.2
LAMPS INSIDE	1	η up(%)	6.9	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	0.0	η down(%)	93.1	CIBSE SHR MAX	1.35

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

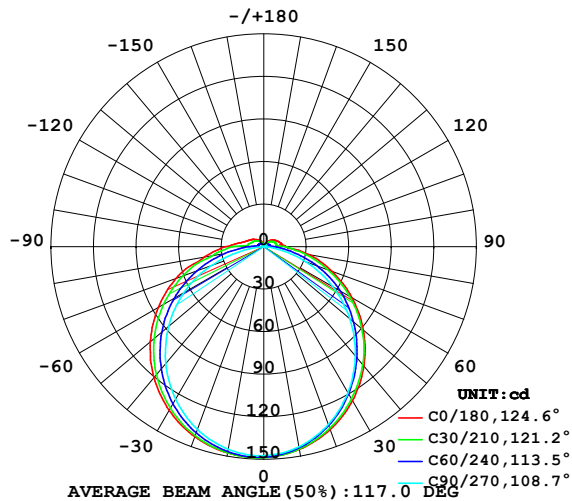

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

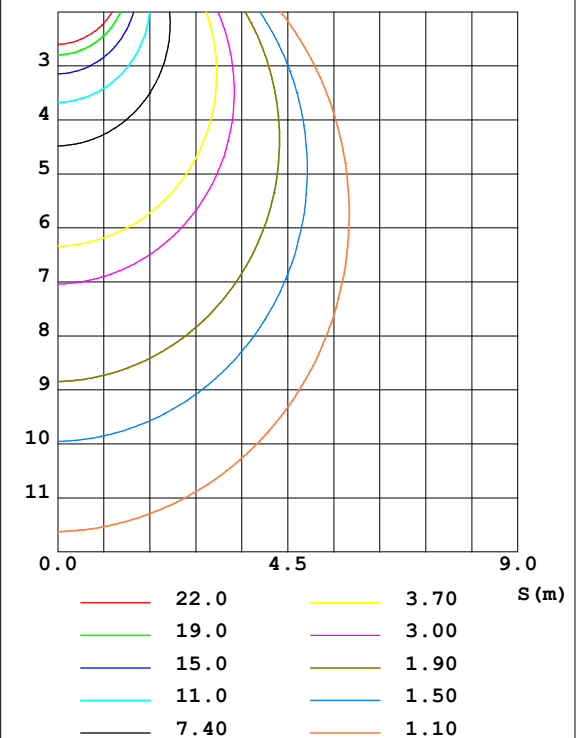

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Test Date:2025-01-03

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.269
Humidity:65.0%
Test Distance:6.400m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
10	145.1	144.5	143.3	144.5	147.6	147.2	145.1	144.8	0- 10	13.99	13.99	2.83,2.83
20	137.2	135.2	133.3	136.8	142.6	140.7	137.1	137.2	10- 20	40.07	54.06	10.9,10.9
30	125.3	121.9	118.9	125.3	133.4	129.9	124.4	125.2	20- 30	60.85	114.9	23.3,23.3
40	110.0	105.4	100.4	110.7	120.6	115.2	107.5	109.4	30- 40	73.92	188.8	38.2,38.2
50	91.74	86.52	79.40	93.48	104.5	97.45	87.62	90.62	40- 50	78.01	266.8	54,54
60	71.81	65.90	56.11	73.76	85.70	77.19	65.23	69.62	50- 60	72.91	339.8	68.8,68.8
70	51.28	44.24	31.69	52.52	65.94	55.54	39.54	47.69	60- 70	59.53	399.3	80.9,80.9
80	32.57	24.39	9.264	30.44	42.57	32.34	12.66	27.26	70- 80	39.94	439.2	89,89
90	15.68	11.47	1.178	14.96	27.12	16.46	0.7728	11.17	80- 90	20.57	459.8	93.1,93.1
100	12.85	6.482	1.227	8.086	16.68	7.622	0.8421	5.913	90-100	9.719	469.5	95.1,95.1
110	10.92	6.205	1.356	6.848	12.36	6.607	0.9635	6.311	100-110	7.335	476.8	96.6,96.6
120	9.181	5.315	1.462	6.134	10.20	5.839	1.106	5.498	110-120	6.022	482.9	97.8,97.8
130	7.290	3.649	1.542	5.112	8.053	4.875	1.255	3.636	120-130	4.485	487.4	98.7,98.7
140	5.258	2.507	1.622	3.829	6.252	3.750	1.410	2.472	130-140	3.025	490.4	99.3,99.3
150	1.806	1.775	1.705	2.820	4.765	2.815	1.558	1.590	140-150	1.695	492.1	99.7,99.7
160	1.908	1.854	1.801	1.890	2.568	1.823	1.702	1.722	150-160	0.9721	493.0	99.9,99.9
170	1.894	1.877	1.873	1.882	1.831	1.830	1.829	1.843	160-170	0.5226	493.6	100,100
180	1.886	1.896	1.909	1.910	1.883	1.894	1.909	1.912	170-180	0.1789	493.7	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Test Date:2025-01-03

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.269
 Humidity:65.0%
 Test Distance:6.400m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:24.00V I:0.2690A P:6.456W PF:1.000 Lamp Flux:493.748x1 lm		
NAME: LB-TW3050K	TYPE: LED Light Bar	WEIGHT:
SPEC: 6.5W	DIM.: 500*16.5*12.5 (MM)	SERIAL No.: 001
MFR.: Flexfire LEDs, Inc.	SUR.:0.488*0.02	PROTECTION ANGLE: 120

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Coefficients of Utilization(CU)												
0.0	1.17	1.17	1.17	1.14	1.14	1.14	1.07	1.07	1.07	1.01	1.01	1.01	.96	.96	.96	.93
1.0	1.01	.96	.92	.98	.93	.89	.92	.89	.85	.87	.84	.81	.82	.80	.78	.75
2.0	.87	.80	.74	.84	.78	.72	.80	.74	.69	.75	.71	.67	.71	.68	.64	.62
3.0	.76	.67	.61	.74	.66	.60	.70	.63	.58	.66	.60	.56	.63	.58	.54	.51
4.0	.67	.58	.51	.65	.57	.50	.62	.55	.49	.59	.52	.47	.56	.50	.46	.44
5.0	.60	.50	.44	.58	.50	.43	.55	.48	.42	.52	.46	.41	.50	.44	.40	.37
6.0	.54	.44	.38	.52	.44	.37	.50	.42	.37	.47	.41	.36	.45	.39	.35	.33
7.0	.49	.40	.33	.47	.39	.33	.45	.38	.32	.43	.36	.32	.41	.35	.31	.29
8.0	.44	.36	.30	.43	.35	.29	.41	.34	.29	.40	.33	.28	.38	.32	.28	.26
9.0	.41	.32	.27	.40	.32	.26	.38	.31	.26	.36	.30	.25	.35	.29	.25	.23
10.0	.37	.29	.24	.37	.29	.24	.35	.28	.23	.34	.27	.23	.32	.27	.23	.21

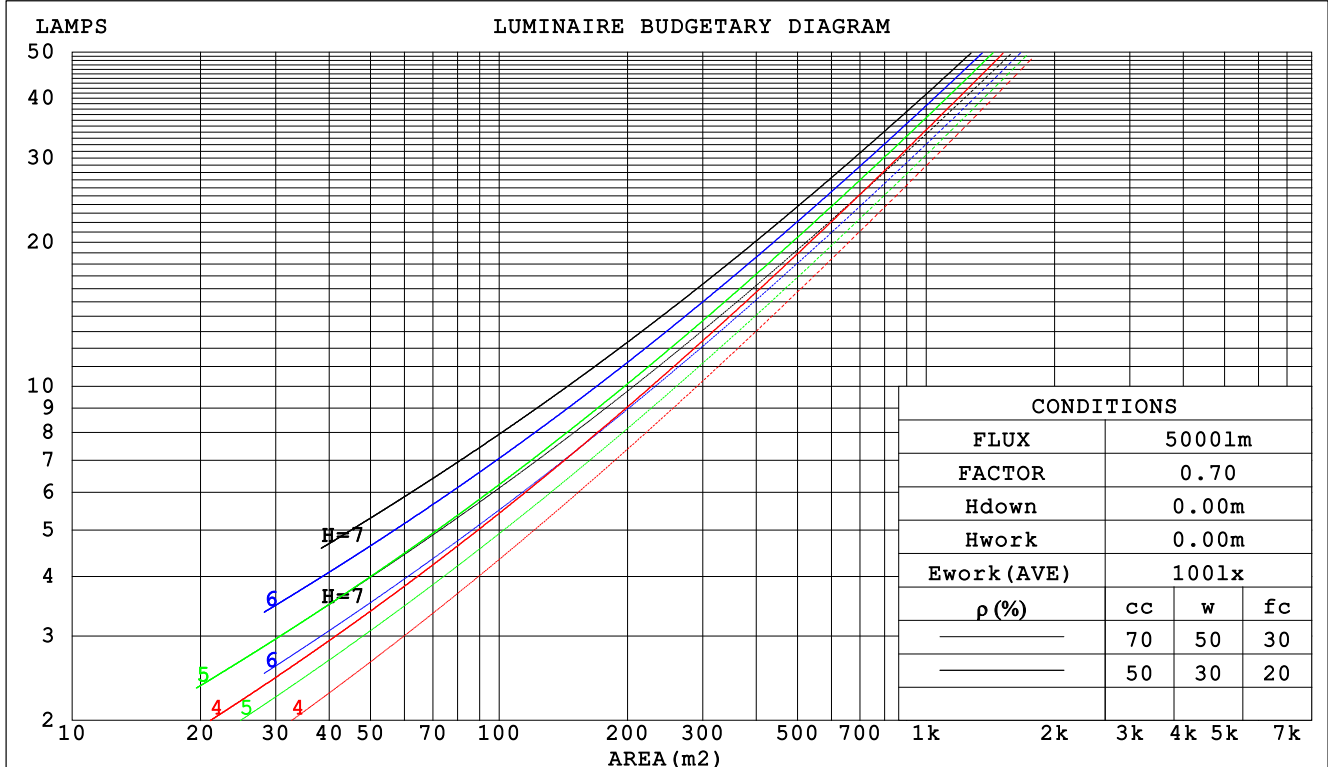

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Test Date:2025-01-03

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.269
Humidity:65.0%
Test Distance:6.400m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:24.00V I:0.2690A P:6.456W PF:1.000 Lamp Flux:493.748x1 lm		
NAME: LB-TW3050K	TYPE: LED Light Bar	WEIGHT:
SPEC: 6.5W	DIM.: 500*16.5*12.5 (MM)	SERIAL No.: 001
MFR.: Flexfire LEDs, Inc.	SUR.:0.488*0.02	PROTECTION ANGLE: 120

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients (WEC)										
0.0																	
1.0	.341	.194	.061	.332	.189	.060	.314	.180	.058	.299	.172	.055	.284	.165	.053		
2.0	.309	.169	.052	.301	.166	.051	.286	.159	.049	.271	.152	.048	.258	.146	.046		
3.0	.281	.150	.045	.274	.147	.044	.260	.141	.043	.247	.135	.042	.235	.130	.040		
4.0	.257	.133	.039	.250	.131	.039	.238	.126	.038	.226	.121	.037	.215	.117	.036		
5.0	.236	.120	.035	.230	.118	.034	.219	.114	.033	.208	.110	.033	.198	.106	.032		
6.0	.217	.109	.031	.212	.107	.031	.202	.104	.030	.193	.100	.029	.184	.097	.029		
7.0	.202	.100	.028	.197	.098	.028	.188	.095	.027	.179	.092	.027	.171	.089	.026		
8.0	.188	.092	.026	.183	.090	.026	.175	.087	.025	.167	.085	.024	.160	.082	.024		
9.0	.175	.085	.024	.171	.084	.023	.164	.081	.023	.157	.079	.023	.150	.076	.022		
10.0	.165	.079	.022	.161	.078	.022	.154	.075	.021	.148	.073	.021	.141	.071	.020		

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.243	.243	.243	.208	.208	.208	.142	.142	.142	.081	.081	.081	.026	.026	.026	
1.0	.235	.209	.185	.201	.179	.159	.138	.123	.110	.079	.071	.064	.025	.023	.021	
2.0	.228	.185	.149	.195	.159	.129	.134	.110	.090	.077	.064	.053	.025	.021	.017	
3.0	.220	.168	.126	.189	.145	.109	.130	.101	.077	.075	.059	.045	.024	.019	.015	
4.0	.212	.155	.111	.182	.134	.096	.125	.093	.068	.073	.055	.040	.023	.018	.013	
5.0	.205	.145	.100	.176	.125	.087	.121	.087	.062	.070	.051	.037	.023	.017	.012	
6.0	.198	.136	.093	.170	.118	.081	.117	.083	.057	.068	.049	.034	.022	.016	.011	
7.0	.191	.130	.087	.164	.112	.076	.113	.079	.054	.066	.046	.032	.021	.015	.011	
8.0	.184	.124	.083	.158	.108	.072	.110	.076	.051	.064	.045	.030	.021	.015	.010	
9.0	.178	.119	.079	.153	.103	.069	.106	.073	.049	.062	.043	.029	.020	.014	.010	
10.0	.172	.115	.077	.148	.100	.067	.103	.070	.048	.060	.041	.028	.019	.014	.009	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Test Date:2025-01-03

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.269
Humidity:65.0%
Test Distance:6.400m [K=1.0000]
Remarks:

Uncorrected UGR Table

Test:U:24.00V I:0.2690A P:6.456W PF:1.000 Lamp Flux:493.748x1 lm										
NAME: LB-TW3050K					TYPE: LED Light Bar			WEIGHT:		
SPEC: 6.5W					DIM.: 500*16.5*12.5 (MM)			SERIAL No.: 001		
MFR.: Flexfire LEDs, Inc.					SUR.:0.488*0.02			PROTECTION ANGLE: 120		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	21.7	23.2	22.1	23.5	23.8	20.8	22.2	21.1	22.5	22.9
3H	23.6	24.9	24.0	25.3	25.7	22.1	23.4	22.5	23.8	24.2
4H	24.5	25.8	24.9	26.2	26.6	22.5	23.8	22.9	24.2	24.6
6H	25.4	26.6	25.9	27.0	27.5	22.8	24.0	23.2	24.4	24.8
8H	25.9	27.0	26.3	27.4	27.9	22.8	24.0	23.2	24.4	24.8
12H	26.3	27.4	26.8	27.9	28.3	22.8	23.9	23.2	24.3	24.8
4H 2H	22.3	23.5	22.7	23.9	24.3	21.5	22.8	21.9	23.2	23.6
3H	24.3	25.5	24.8	25.9	26.3	23.1	24.2	23.5	24.6	25.1
4H	25.4	26.5	25.9	26.9	27.4	23.7	24.7	24.1	25.1	25.6
6H	26.5	27.5	27.0	27.9	28.4	24.0	25.0	24.5	25.4	25.9
8H	27.1	27.9	27.6	28.4	28.9	24.1	25.0	24.6	25.5	26.0
12H	27.6	28.4	28.2	28.9	29.5	24.1	24.9	24.6	25.4	26.0
8H 4H	25.7	26.5	26.2	27.0	27.6	24.2	25.0	24.7	25.5	26.1
6H	27.0	27.8	27.6	28.3	28.9	24.8	25.5	25.3	26.0	26.6
8H	27.7	28.4	28.3	28.9	29.5	25.0	25.6	25.5	26.1	26.7
12H	28.5	29.0	29.1	29.6	30.2	25.1	25.6	25.6	26.2	26.8
12H 4H	25.7	26.5	26.2	27.0	27.5	24.3	25.1	24.8	25.6	26.1
6H	27.1	27.7	27.7	28.3	28.9	25.0	25.6	25.5	26.2	26.8
8H	27.9	28.4	28.4	29.0	29.6	25.3	25.8	25.9	26.4	27.0
Variations with the observer position at spacings:										
S = 1.0H	+ 0.1 / - 0.1					+ 0.1 / - 0.2				
1.5H	+ 0.2 / - 0.2					+ 0.2 / - 0.3				
2.0H	+ 0.1 / - 0.3					+ 0.2 / - 0.4				

CIE Pub.117 Corrected 493.7 lm Total Lamp Luminous Flux. (8log(F/F0) = -2.5)

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Test Date:2025-01-03

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.269
Humidity:65.0%
Test Distance:6.400m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:24.00V I:0.2690A P:6.456W PF:1.000 Lamp Flux:493.748x1 lm		
NAME: LB-TW3050K	TYPE: LED Light Bar	WEIGHT:
SPEC: 6.5W	DIM.: 500*16.5*12.5 (MM)	SERIAL No.: 001
MFR.: Flexfire LEDs, Inc.	SUR.:0.488*0.02	PROTECTION ANGLE: 120


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	54	42	35	53	41	34	51	41	34	28
0.80	63	51	44	62	51	43	60	50	43	35
1.00	71	60	52	70	59	52	67	60	51	43
1.25	79	67	59	77	66	59	73	64	58	49
1.50	84	73	65	82	72	64	78	69	63	54
2.00	91	81	74	88	80	73	84	77	71	61
2.50	95	86	79	92	84	78	87	81	76	65
3.00	98	90	84	96	88	83	90	85	80	69
4.00	103	96	91	100	94	89	94	89	85	74
5.00	105	100	95	102	97	93	96	92	89	77
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Test Date: 2025-01-03

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.269
 Humidity: 65.0%
 Test Distance: 6.400m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:24.00V I:0.2690A P:6.456W PF:1.000 Lamp Flux:493.748x1 lm		
NAME: LB-TW3050K	TYPE: LED Light Bar	WEIGHT:
SPEC: 6.5W	DIM.: 500*16.5*12.5 (MM)	SERIAL No.: 001
MFR.: Flexfire LEDs, Inc.	SUR.:0.488*0.02	PROTECTION ANGLE: 120

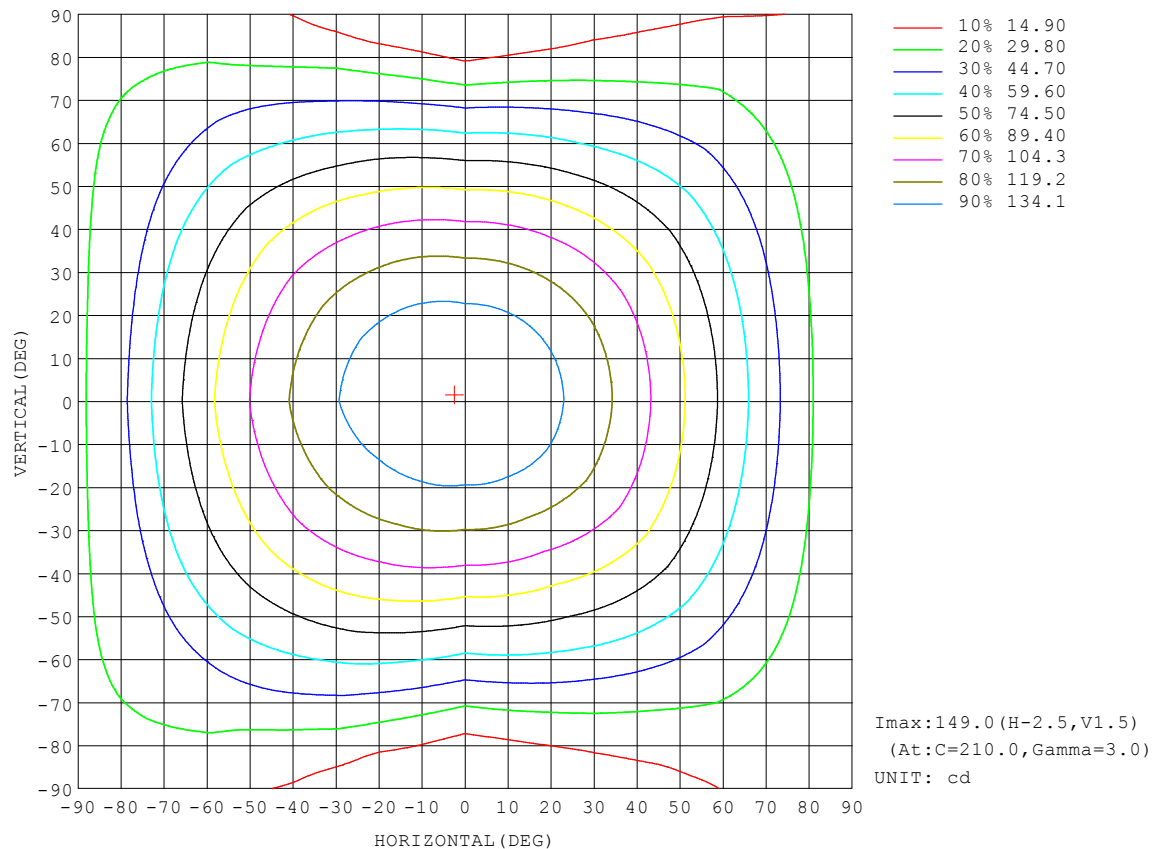


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Test Date:2025-01-03

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.269
Humidity:65.0%
Test Distance:6.400m [K=1.0000]
Remarks:

AAI Figure

Test:U:24.00V I:0.2690A P:6.456W PF:1.000 Lamp Flux:493.748x1 lm		
NAME: LB-TW3050K	TYPE: LED Light Bar	WEIGHT:
SPEC: 6.5W	DIM.: 500*16.5*12.5 (MM)	SERIAL No.: 001
MFR.: Flexfire LEDs, Inc.	SUR.:0.488*0.02	PROTECTION ANGLE: 120

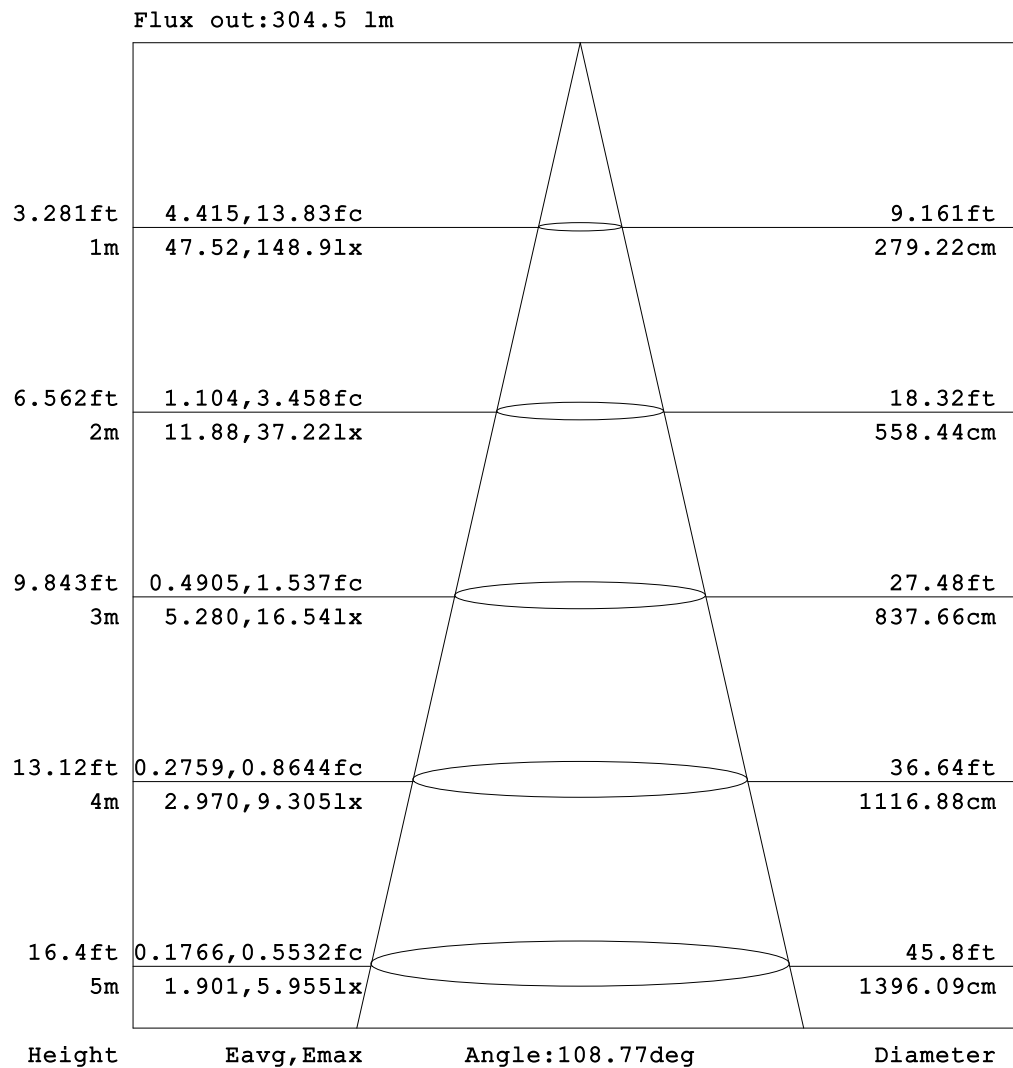


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Test Date:2025-01-03

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.269
Humidity:65.0%
Test Distance:6.400m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:24.00V I:0.2690A P:6.456W PF:1.000 Lamp Flux:493.748x1 lm		
NAME: LB-TW3050K	TYPE: LED Light Bar	WEIGHT:
SPEC: 6.5W	DIM.: 500*16.5*12.5 (MM)	SERIAL No.: 001
MFR.: Flexfire LEDs, Inc.	SUR.:0.488*0.02	PROTECTION ANGLE: 120

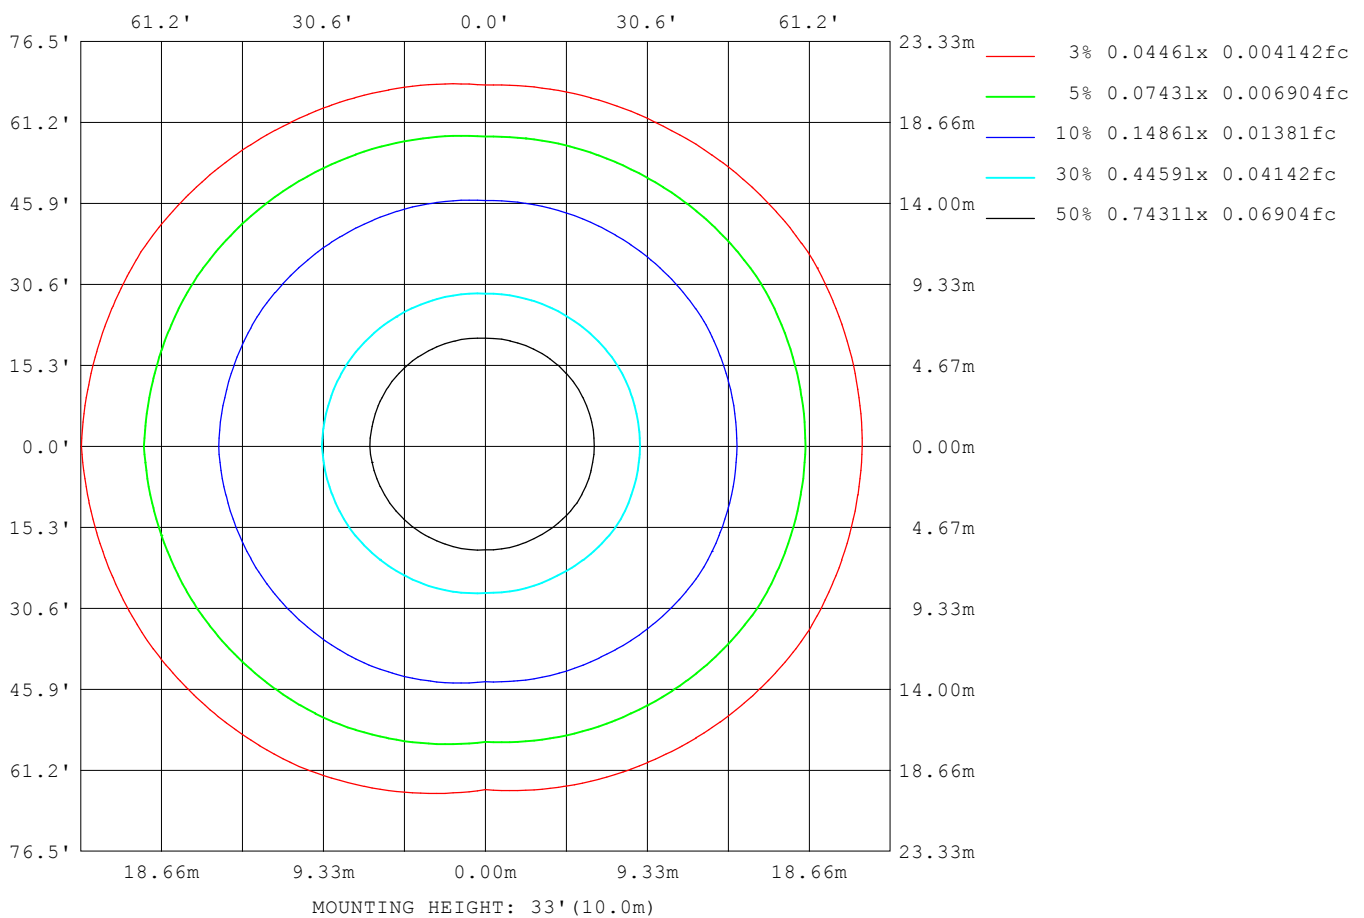

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Test Date:2025-01-03

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.269
Humidity:65.0%
Test Distance:6.400m [K=1.0000]
Remarks:

Planar Illuminance Curve

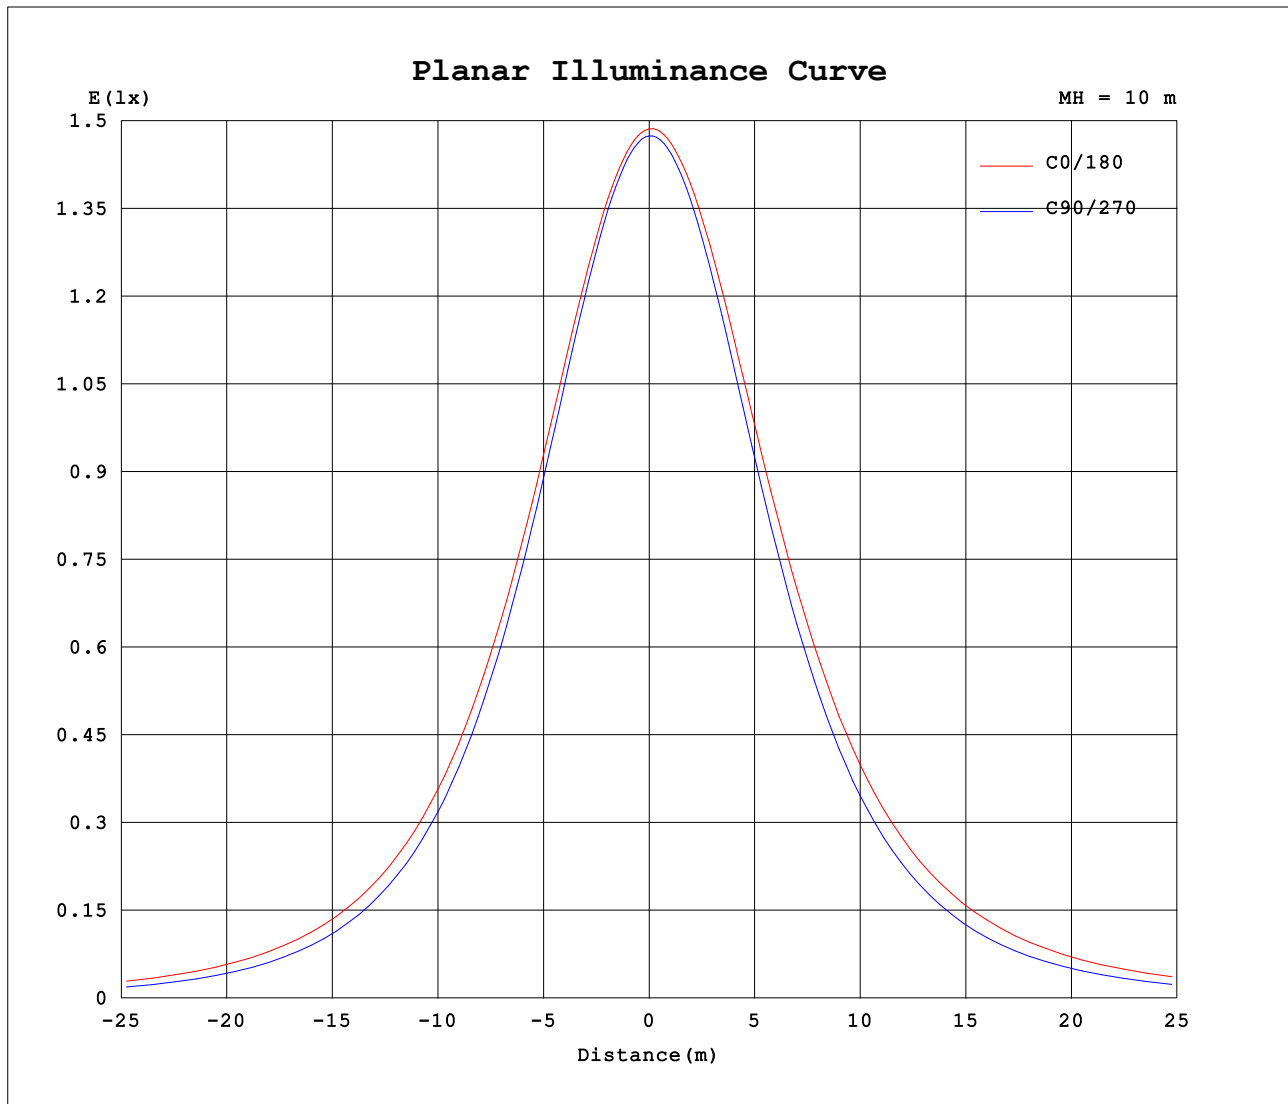

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Test Date: 2025-01-03

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.269
 Humidity: 65.0%
 Test Distance: 6.400m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:24.00V I:0.2690A P:6.456W PF:1.000 Lamp Flux:493.748x1 lm		
NAME: LB-TW3050K	TYPE: LED Light Bar	WEIGHT:
SPEC: 6.5W	DIM.: 500*16.5*12.5 (MM)	SERIAL No.: 001
MFR.: Flexfire LEDs, Inc.	SUR.:0.488*0.02	PROTECTION ANGLE: 120

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330						
0	149	149	148	147	148	147	149	149	148	147	148	147						
5	147	148	147	146	147	147	149	149	148	147	147	146						
10	145	145	144	143	144	145	148	148	147	145	145	144						
15	142	141	140	139	140	142	146	145	144	142	142	141						
20	137	136	134	133	135	138	143	142	140	137	137	137						
25	132	130	128	127	130	134	138	137	134	131	132	132						
30	125	124	120	119	123	128	133	132	128	124	125	125						
35	118	116	111	110	115	122	127	125	121	116	117	118						
40	110	109	102	100	107	114	121	118	113	107	109	110						
45	101	99.9	92.6	90.2	98.2	107	113	110	104	97.8	99.2	101						
50	91.7	90.4	82.7	79.4	89.1	97.9	105	101	93.9	87.6	89.2	92.0						
55	82.0	80.2	72.6	68.0	79.4	88.5	95.5	91.6	83.7	76.7	78.7	82.1						
60	71.8	69.8	62.0	56.1	68.9	78.6	85.7	81.6	72.8	65.2	67.3	71.9						
65	61.5	59.1	51.1	44.0	58.1	68.5	76.0	71.3	61.7	53.2	56.0	61.4						
70	51.3	48.4	40.1	31.7	47.0	58.1	65.9	60.7	50.3	39.5	44.6	50.8						
75	41.5	38.3	29.3	19.8	36.2	46.5	54.4	50.2	38.9	25.6	33.4	40.6						
80	32.6	29.3	19.4	9.26	25.6	35.3	42.6	36.8	27.8	12.7	22.9	31.6						
85	21.7	20.5	12.0	2.00	15.8	27.3	34.2	28.8	17.0	3.11	14.6	22.1						
90	15.7	15.1	7.82	1.18	10.3	19.7	27.1	22.1	10.8	0.77	8.16	14.2						
95	12.5	8.86	4.66	1.17	5.67	12.0	20.8	11.9	6.00	0.79	4.95	8.13						
100	12.8	8.86	4.11	1.23	4.73	11.4	16.7	11.0	4.20	0.84	4.04	7.78						
105	11.9	8.71	4.18	1.30	5.00	10.2	14.0	9.90	4.33	0.90	4.19	8.46						
110	10.9	8.40	4.01	1.36	4.72	8.98	12.4	9.03	4.19	0.96	4.15	8.47						
115	10.1	7.88	3.71	1.41	4.45	8.94	11.1	8.59	3.97	1.04	3.90	7.97						
120	9.18	7.26	3.37	1.46	4.18	8.09	10.2	7.93	3.75	1.11	3.60	7.40						
125	8.25	6.44	2.01	1.50	3.92	7.28	9.10	7.11	3.54	1.18	2.71	6.57						
130	7.29	5.70	1.60	1.54	3.65	6.58	8.05	6.43	3.32	1.26	1.35	5.92						
135	6.21	4.66	1.64	1.58	3.25	5.86	7.16	5.75	3.02	1.33	1.38	5.07						
140	5.26	3.34	1.67	1.62	2.44	5.22	6.25	5.13	2.37	1.41	1.45	3.50						
145	2.91	1.76	1.71	1.66	2.02	4.62	5.44	4.62	1.92	1.48	1.51	1.56						
150	1.81	1.80	1.75	1.71	1.74	3.90	4.76	4.03	1.60	1.56	1.58	1.60						
155	1.86	1.85	1.78	1.75	1.77	2.66	3.92	2.80	1.67	1.63	1.65	1.66						
160	1.91	1.89	1.82	1.80	1.82	1.96	2.57	1.92	1.73	1.70	1.72	1.73						
165	1.91	1.89	1.84	1.84	1.86	1.89	1.82	1.81	1.78	1.77	1.78	1.79						
170	1.89	1.88	1.87	1.87	1.89	1.88	1.83	1.83	1.83	1.83	1.85	1.83						
175	1.89	1.88	1.90	1.90	1.91	1.89	1.85	1.86	1.87	1.87	1.89	1.87						
180	1.89	1.88	1.91	1.91	1.92	1.90	1.88	1.88	1.90	1.91	1.92	1.91						

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Test Date:2025-01-03

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.269
Humidity:65.0%
Test Distance:6.400m [K=1.0000]
Remarks: