
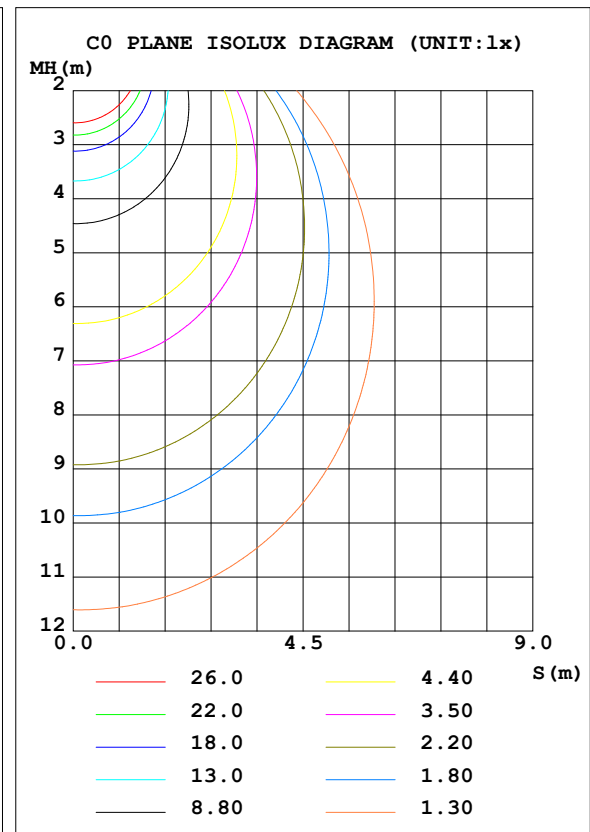


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:24.001V I:0.2390A P:5.7362W PF:1.0000 Freq:0Hz Lamp Flux:536.15x1 lm		
NAME: UB-AT1-DYN276295C	TYPE: LED Strip	WEIGHT:
SPEC.: 5.75W	DIM.: 1000*10*2 (MM)	SERIAL No.: 001
MFR.: Flexfire LEDs, Inc.	SUR.: 0.01*1	Shielding Angle: 120

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL		Imax (cd)	175.7	S/MH (C0/180)	1.26
NOMINAL POWER (W)		LOR (%)	100.0	S/MH (C90/270)	1.34
RATED VOLTAGE (V)		TOTAL FLUX (lm)	536.17	η UP, DN (C0-180)	0.3, 47.9
NOMINAL FLUX (lm)	536.15	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.7, 51.1
LAMPS INSIDE	1	η up (%)	1.0	CIBSE SHR NOM	1.25
TEST VOLTAGE (V)		η down (%)	99.0	CIBSE SHR MAX	1.35

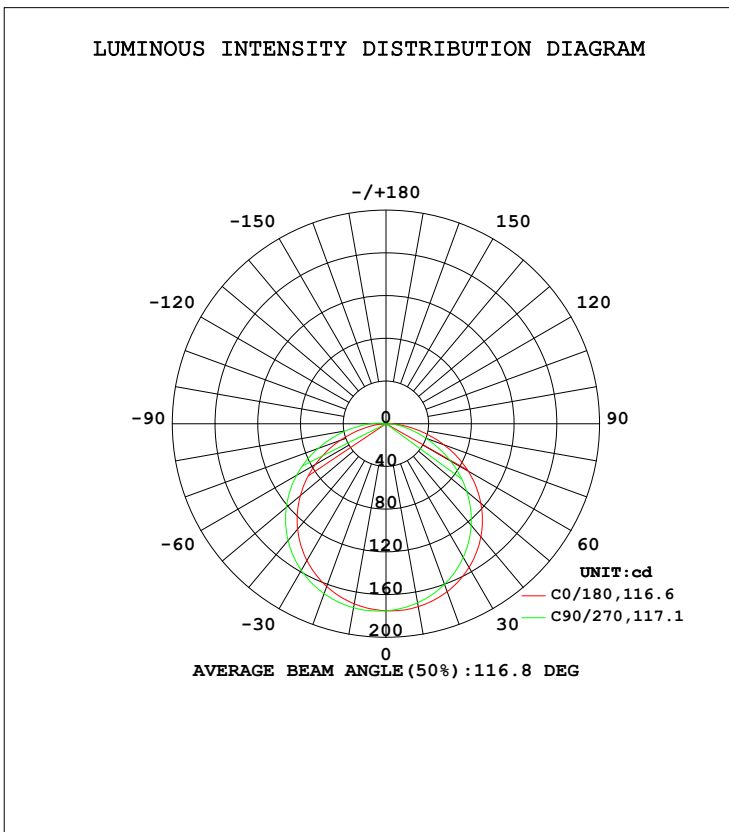

C Range: 0 - 360DEG  
 C Interval: 90.0DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Test Date: 2023-05-21

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.00.444  
 Humidity: 65.0%  
 Test Distance: 8.700m [K=1.0000]  
 Remarks:

**ZONAL FLUX DIAGRAM**
**ZONAL FLUX DIAGRAM:**


$\gamma$	C0	C90	C180	C270				$\gamma$	$\Phi$ zone	$\Phi$ total	%lum, lamp
10	173.9	170.2	171.2	174.9				0- 10	16.60	16.60	3.1,3.1
20	167.4	160.0	162.2	169.4				10- 20	47.81	64.41	12,12
30	155.5	144.6	148.0	158.5				20- 30	73.23	137.6	25.7,25.7
40	138.2	124.1	128.8	142.7				30- 40	89.58	227.2	42.4,42.4
50	115.9	98.76	104.7	121.8				40- 50	94.44	321.7	60,60
60	88.96	69.84	76.39	96.62				50- 60	86.76	408.4	76.2,76.2
70	57.92	40.19	45.71	67.70				60- 70	67.30	475.7	88.7,88.7
80	26.41	16.17	16.76	37.92				70- 80	40.27	516.0	96.2,96.2
90	2.446	3.235	0.1969	14.30				80- 90	14.72	530.7	99,99
100	0.1822	0.5411	0.2711	3.369				90-100	2.795	533.5	99.5,99.5
110	0.1971	0.3817	0.3794	0.2980				100-110	0.5112	534.0	99.6,99.6
120	0.3204	0.4926	0.4976	0.3200				110-120	0.3549	534.4	99.7,99.7
130	0.4063	0.5668	0.5790	0.3817				120-130	0.3971	534.8	99.7,99.7
140	0.5405	0.6650	0.6663	0.5418				130-140	0.4222	535.2	99.8,99.8
150	0.5907	0.7193	0.7024	0.5812				140-150	0.3923	535.6	99.9,99.9
160	0.7018	0.7637	0.7144	0.6404				150-160	0.3110	535.9	99.9,100
170	0.7410	0.7636	0.7433	0.7459				160-170	0.2062	536.1	100,100
180	0.7636	0.7636	0.8129	0.8252				170-180	0.0722	536.2	100,100
DEG	LUMINOUS INTENSITY:cd								UNIT:lm		

C Range: 0 - 360DEG  
 C Interval: 90.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Test Date:2023-05-21

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.444  
 Humidity:65.0%  
 Test Distance:8.700m [K=1.0000]  
 Remarks:

**LUMINANCE LIMITATION CURVES**

Test:U:24.001V I:0.2390A P:5.7362W PF:1.0000 Freq:0Hz Lamp Flux:536.15x1 lm		
NAME: UB-AT1-DYN276295C	TYPE: LED Strip	WEIGHT:
SPEC.: 5.75W	DIM.: 1000*10*2 (MM)	SERIAL No.: 001
MFR.: Flexfire LEDs, Inc.	SUR.: 0.01*1	Shielding Angle: 120

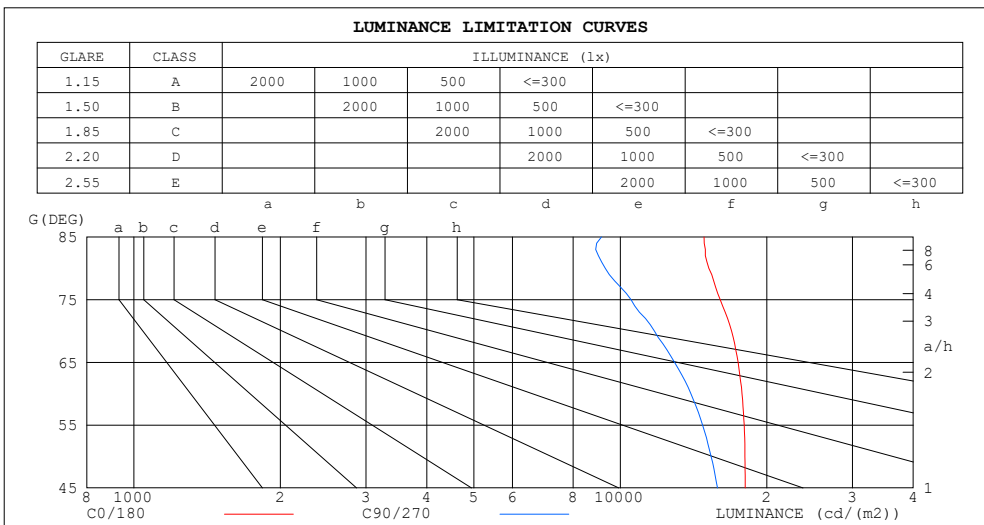

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	14860	9142
80	15211	9311
75	16051	10524
70	16935	11750
65	17462	12928
60	17793	13969
55	17974	14763
50	18037	15365
45	18062	15840


C Range: 0 - 360DEG  
 C Interval: 90.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Test Date:2023-05-21

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.444  
 Humidity:65.0%  
 Test Distance:8.700m [K=1.0000]  
 Remarks:

**CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM**

Test:U:24.001V I:0.2390A P:5.7362W PF:1.0000 Freq:0Hz Lamp Flux:536.15x1 lm		
NAME: UB-AT1-DYN276295C	TYPE: LED Strip	WEIGHT:
SPEC.: 5.75W	DIM.: 1000*10*2 (MM)	SERIAL No.: 001
MFR.: Flexfire LEDs, Inc.	SUR.: 0.01*1	Shielding Angle: 120

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.01	1.01	1.01	.99
1.0	1.03	.98	.94	1.01	.96	.93	.96	.93	.90	.92	.89	.87	.88	.86	.84	.82
2.0	.89	.82	.76	.87	.81	.75	.84	.78	.73	.80	.76	.72	.77	.73	.70	.68
3.0	.78	.70	.63	.77	.69	.62	.73	.67	.61	.70	.65	.60	.68	.63	.59	.57
4.0	.69	.60	.53	.68	.59	.53	.65	.58	.52	.63	.56	.51	.60	.55	.50	.48
5.0	.62	.52	.46	.60	.52	.45	.58	.51	.45	.56	.49	.44	.54	.48	.44	.41
6.0	.55	.46	.40	.54	.46	.39	.52	.45	.39	.51	.44	.39	.49	.43	.38	.36
7.0	.50	.41	.35	.49	.41	.35	.48	.40	.34	.46	.39	.34	.45	.38	.34	.32
8.0	.46	.37	.31	.45	.37	.31	.43	.36	.31	.42	.35	.30	.41	.35	.30	.28
9.0	.42	.34	.28	.41	.33	.28	.40	.33	.28	.39	.32	.27	.38	.32	.27	.25
10.0	.39	.31	.25	.38	.30	.25	.37	.30	.25	.36	.29	.25	.35	.29	.25	.23

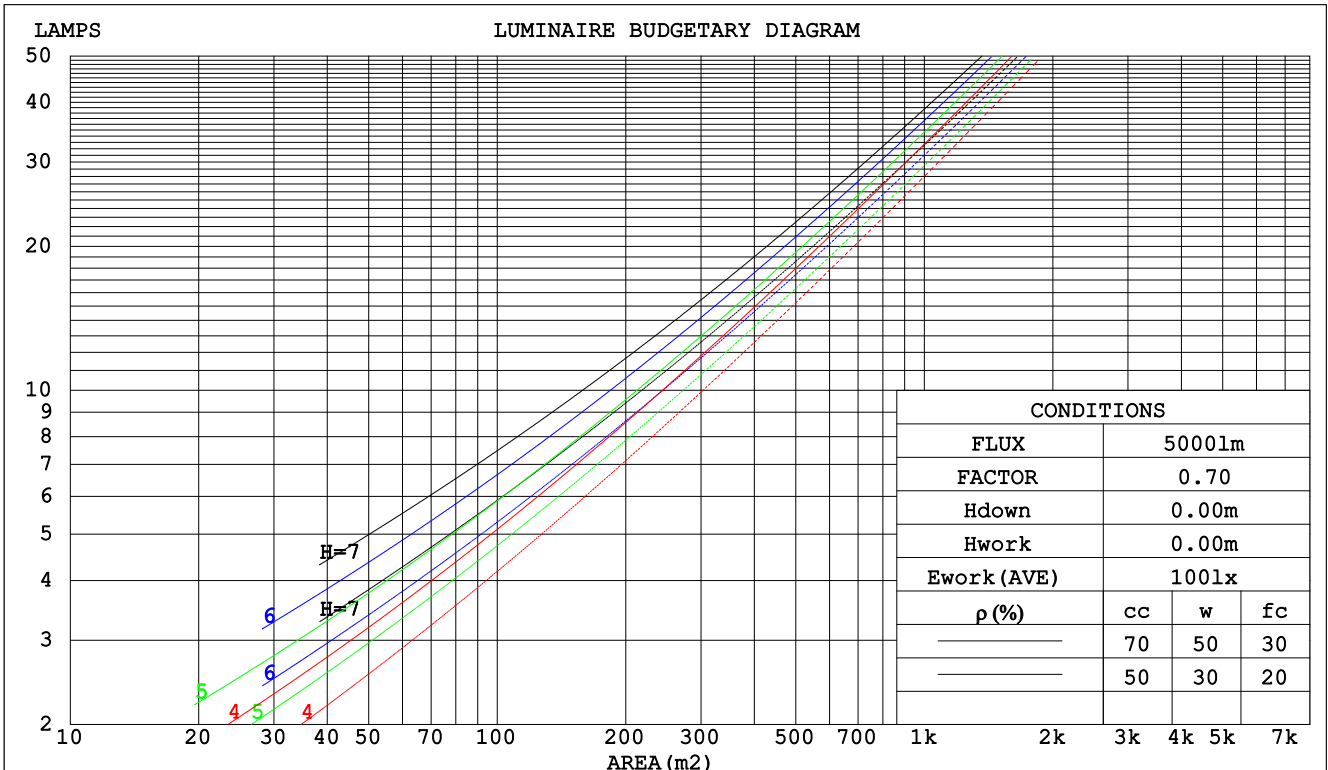

C Range: 0 - 360DEG  
 C Interval: 90.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Test Date:2023-05-21

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.444  
 Humidity:65.0%  
 Test Distance:8.700m [K=1.0000]  
 Remarks:

**WEC AND CCEC**

Test:U:24.001V I:0.2390A P:5.7362W PF:1.0000 Freq:0Hz Lamp Flux:536.15x1 lm									
NAME: UB-AT1-DYN276295C					TYPE: LED Strip			WEIGHT:	
SPEC.: 5.75W					DIM.: 1000*10*2 (MM)			SERIAL No.: 001	
MFR.: Flexfire LEDs, Inc.					SUR.: 0.01*1			Shielding Angle: 120	

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.323	.184	.058	.316	.180	.057	.302	.173	.055	.289	.167	.053	.277	.161	.052	
2.0	.300	.164	.050	.294	.162	.050	.281	.156	.049	.270	.151	.047	.259	.147	.046	
3.0	.276	.147	.044	.270	.145	.044	.259	.140	.043	.249	.137	.042	.240	.133	.041	
4.0	.254	.132	.039	.249	.130	.038	.239	.127	.038	.230	.123	.037	.221	.120	.037	
5.0	.234	.119	.035	.229	.118	.034	.221	.115	.034	.213	.112	.033	.205	.110	.033	
6.0	.216	.108	.031	.212	.107	.031	.205	.105	.031	.197	.103	.030	.191	.100	.030	
7.0	.201	.099	.028	.197	.098	.028	.191	.096	.028	.184	.094	.027	.178	.092	.027	
8.0	.188	.092	.026	.184	.091	.026	.178	.089	.025	.172	.087	.025	.167	.086	.025	
9.0	.176	.085	.024	.173	.084	.024	.167	.083	.023	.162	.081	.023	.157	.080	.023	
10.0	.165	.079	.022	.162	.078	.022	.157	.077	.022	.153	.076	.022	.148	.074	.021	

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.198	.198	.198	.169	.169	.169	.116	.116	.116	.066	.066	.066	.021	.021	.021	
1.0	.189	.164	.141	.162	.141	.121	.111	.097	.084	.064	.056	.049	.020	.018	.016	
2.0	.181	.140	.105	.155	.120	.091	.106	.083	.063	.061	.048	.037	.020	.016	.012	
3.0	.174	.122	.081	.149	.105	.071	.102	.073	.049	.059	.043	.029	.019	.014	.010	
4.0	.166	.109	.066	.142	.094	.057	.098	.066	.040	.057	.038	.024	.018	.013	.008	
5.0	.158	.099	.055	.136	.085	.048	.094	.060	.034	.054	.035	.020	.017	.011	.007	
6.0	.151	.090	.047	.130	.078	.041	.090	.055	.029	.052	.032	.017	.017	.011	.006	
7.0	.144	.084	.041	.124	.072	.036	.086	.051	.025	.050	.030	.015	.016	.010	.005	
8.0	.138	.078	.036	.119	.067	.032	.082	.047	.023	.048	.028	.013	.015	.009	.004	
9.0	.132	.073	.033	.113	.063	.029	.079	.044	.020	.046	.026	.012	.015	.009	.004	
10.0	.126	.069	.030	.109	.060	.026	.075	.042	.019	.044	.025	.011	.014	.008	.004	

C Range: 0 - 360DEG  
 C Interval: 90.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Test Date:2023-05-21

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.444  
 Humidity:65.0%  
 Test Distance:8.700m [K=1.0000]  
 Remarks:

**UGR(Unified Glare Rating) Table**

Test:U:24.001V I:0.2390A P:5.7362W PF:1.0000 Freq:0Hz Lamp Flux:536.15x1 lm										
NAME: UB-AT1-DYN276295C				TYPE: LED Strip			WEIGHT:			
SPEC.: 5.75W				DIM.: 1000*10*2 (MM)			SERIAL No.: 001			
MFR.: Flexfire LEDs, Inc.				SUR.: 0.01*1			Shielding Angle: 120			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	25.0	26.5	25.3	26.8	27.0	24.2	25.7	24.4	25.9	26.1
3H	26.7	28.1	27.0	28.3	28.6	25.5	26.9	25.8	27.1	27.4
4H	27.4	28.7	27.7	29.0	29.3	25.9	27.3	26.3	27.6	27.8
6H	27.9	29.2	28.2	29.5	29.8	26.3	27.5	26.6	27.8	28.1
8H	28.1	29.3	28.4	29.6	29.9	26.4	27.6	26.7	27.9	28.2
12H	28.2	29.4	28.6	29.7	30.1	26.4	27.6	26.8	27.9	28.3
4H 2H	25.5	26.9	25.8	27.1	27.4	24.9	26.2	25.2	26.5	26.8
3H	27.4	28.5	27.7	28.9	29.2	26.4	27.5	26.7	27.9	28.2
4H	28.2	29.3	28.6	29.6	29.9	27.0	28.0	27.4	28.4	28.7
6H	28.8	29.8	29.3	30.2	30.6	27.4	28.4	27.8	28.7	29.1
8H	29.1	30.0	29.5	30.4	30.8	27.6	28.5	28.0	28.9	29.3
12H	29.3	30.1	29.7	30.5	31.0	27.7	28.5	28.1	28.9	29.3
8H 4H	28.4	29.3	28.8	29.7	30.1	27.3	28.2	27.7	28.6	29.0
6H	29.2	29.9	29.7	30.4	30.8	27.9	28.7	28.4	29.1	29.5
8H	29.6	30.2	30.0	30.7	31.1	28.2	28.8	28.6	29.3	29.7
12H	29.9	30.4	30.4	30.9	31.4	28.4	28.9	28.9	29.4	29.9
12H 4H	28.4	29.2	28.8	29.6	30.0	27.3	28.2	27.8	28.6	29.0
6H	29.2	29.9	29.7	30.3	30.8	28.0	28.7	28.5	29.1	29.6
8H	29.6	30.2	30.1	30.7	31.2	28.3	28.9	28.8	29.3	29.8
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 0.1 / - 0.2					+ 0.2 / - 0.2				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.4				
2.0H	+ 0.2 / - 0.3					+ 0.2 / - 0.4				

CIE Pub.117, 536.2 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -2.2)  
 Area: 0.01 m2

C Range: 0 - 360DEG  
 C Interval: 90.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Test Date:2023-05-21

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.444  
 Humidity:65.0%  
 Test Distance:8.700m [K=1.0000]  
 Remarks:

**UTILIZATION FACTORS TABLE**

Test:U:24.001V I:0.2390A P:5.7362W PF:1.0000 Freq:0Hz Lamp Flux:536.15x1 lm		
NAME: UB-AT1-DYN276295C	TYPE: LED Strip	WEIGHT:
SPEC.: 5.75W	DIM.: 1000*10*2 (MM)	SERIAL No.: 001
MFR.: Flexfire LEDs, Inc.	SUR.: 0.01*1	Shielding Angle: 120


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	56	44	37	55	44	37	54	44	37	30
0.80	66	54	47	65	54	47	63	53	46	39
1.00	75	63	56	73	63	55	71	64	55	47
1.25	82	71	64	80	70	63	77	69	62	55
1.50	87	77	69	85	76	69	82	74	68	60
2.00	94	85	78	92	84	77	88	81	76	68
2.50	98	90	83	96	88	82	92	85	80	72
3.00	101	94	88	99	92	87	95	89	85	76
4.00	105	99	94	103	97	93	98	94	90	81
5.00	108	103	98	105	101	97	101	97	94	84
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG  
 C Interval: 90.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Test Date:2023-05-21

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.444  
 Humidity:65.0%  
 Test Distance:8.700m [K=1.0000]  
 Remarks:

**ISOCANDELA DIAGRAM**

Test:U:24.001V I:0.2390A P:5.7362W PF:1.0000 Freq:0Hz Lamp Flux:536.15x1 lm		
NAME: UB-AT1-DYN276295C	TYPE: LED Strip	WEIGHT:
SPEC.: 5.75W	DIM.: 1000*10*2 (MM)	SERIAL No.: 001
MFR.: Flexfire LEDs, Inc.	SUR.: 0.01*1	Shielding Angle: 120

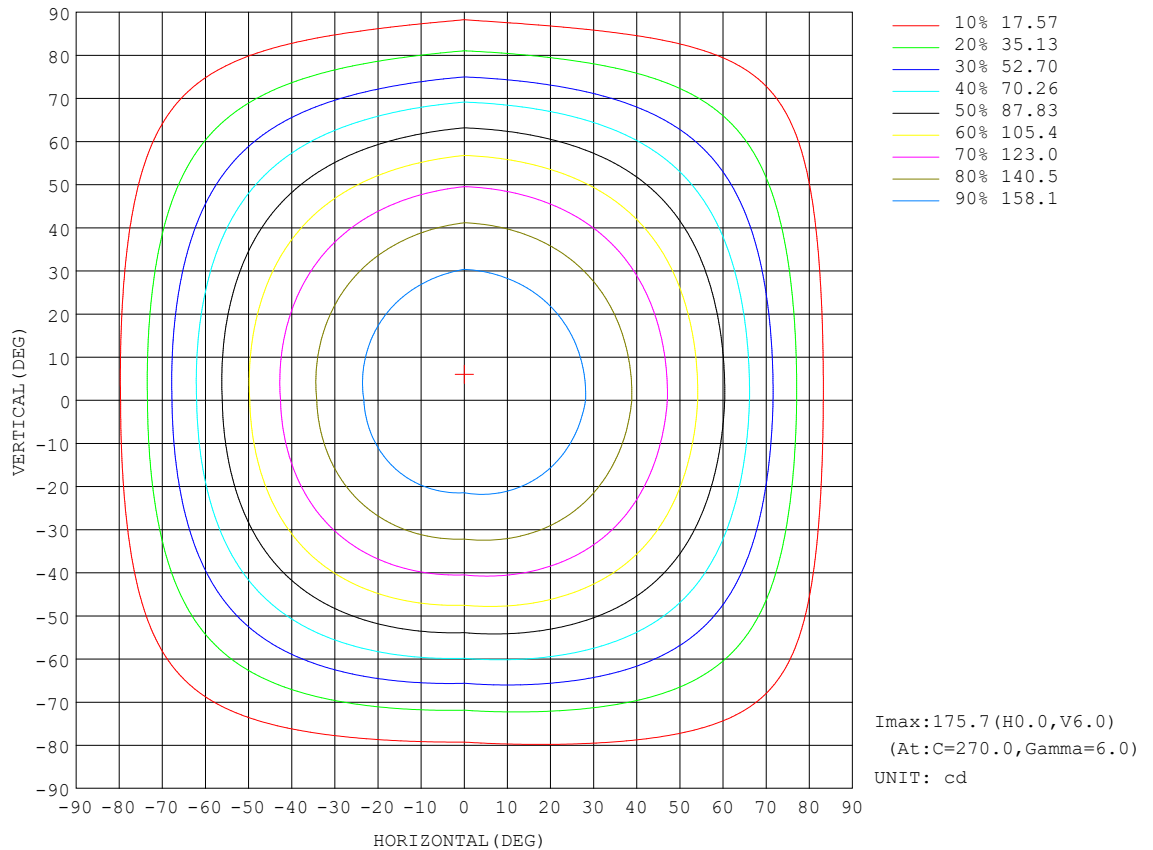


C Range: 0 - 360DEG  
 C Interval: 90.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Test Date:2023-05-21

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.444  
 Humidity:65.0%  
 Test Distance:8.700m [K=1.0000]  
 Remarks:



**AAI Figure**

Test:U:24.001V I:0.2390A P:5.7362W PF:1.0000 Freq:0Hz Lamp Flux:536.15x1 lm		
NAME: UB-AT1-DYN276295C	TYPE: LED Strip	WEIGHT:
SPEC.: 5.75W	DIM.: 1000*10*2 (MM)	SERIAL No.: 001
MFR.: Flexfire LEDs, Inc.	SUR.: 0.01*1	Shielding Angle: 120

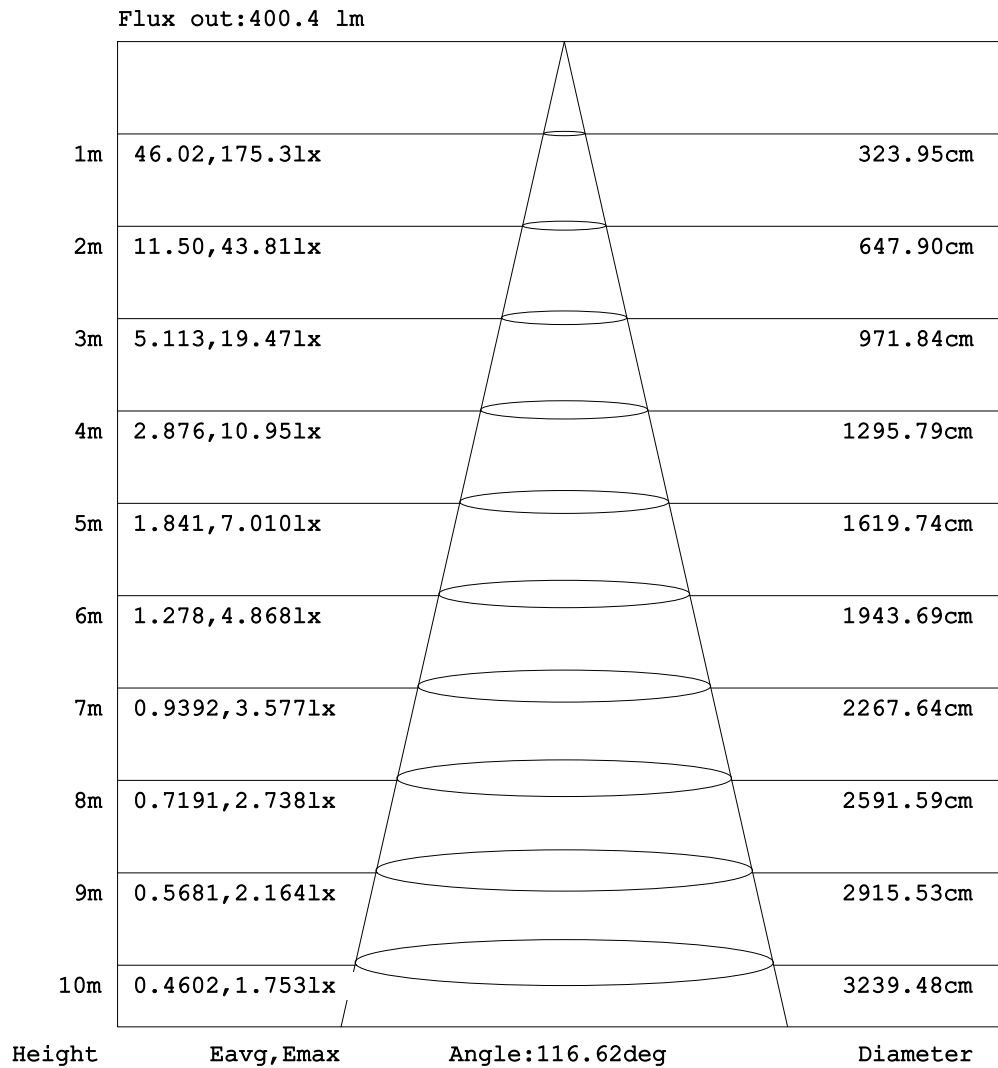


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG  
 C Interval: 90.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Test Date:2023-05-21

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.444  
 Humidity:65.0%  
 Test Distance:8.700m [K=1.0000]  
 Remarks:

ISOLUX DIAGRAM

Test:U:24.001V I:0.2390A P:5.7362W PF:1.0000 Freq:0Hz Lamp Flux:536.15x1 lm		
NAME: UB-AT1-DYN276295C	TYPE: LED Strip	WEIGHT:
SPEC.: 5.75W	DIM.: 1000*10*2 (MM)	SERIAL No.: 001
MFR.: Flexfire LEDs, Inc.	SUR.: 0.01*1	Shielding Angle: 120

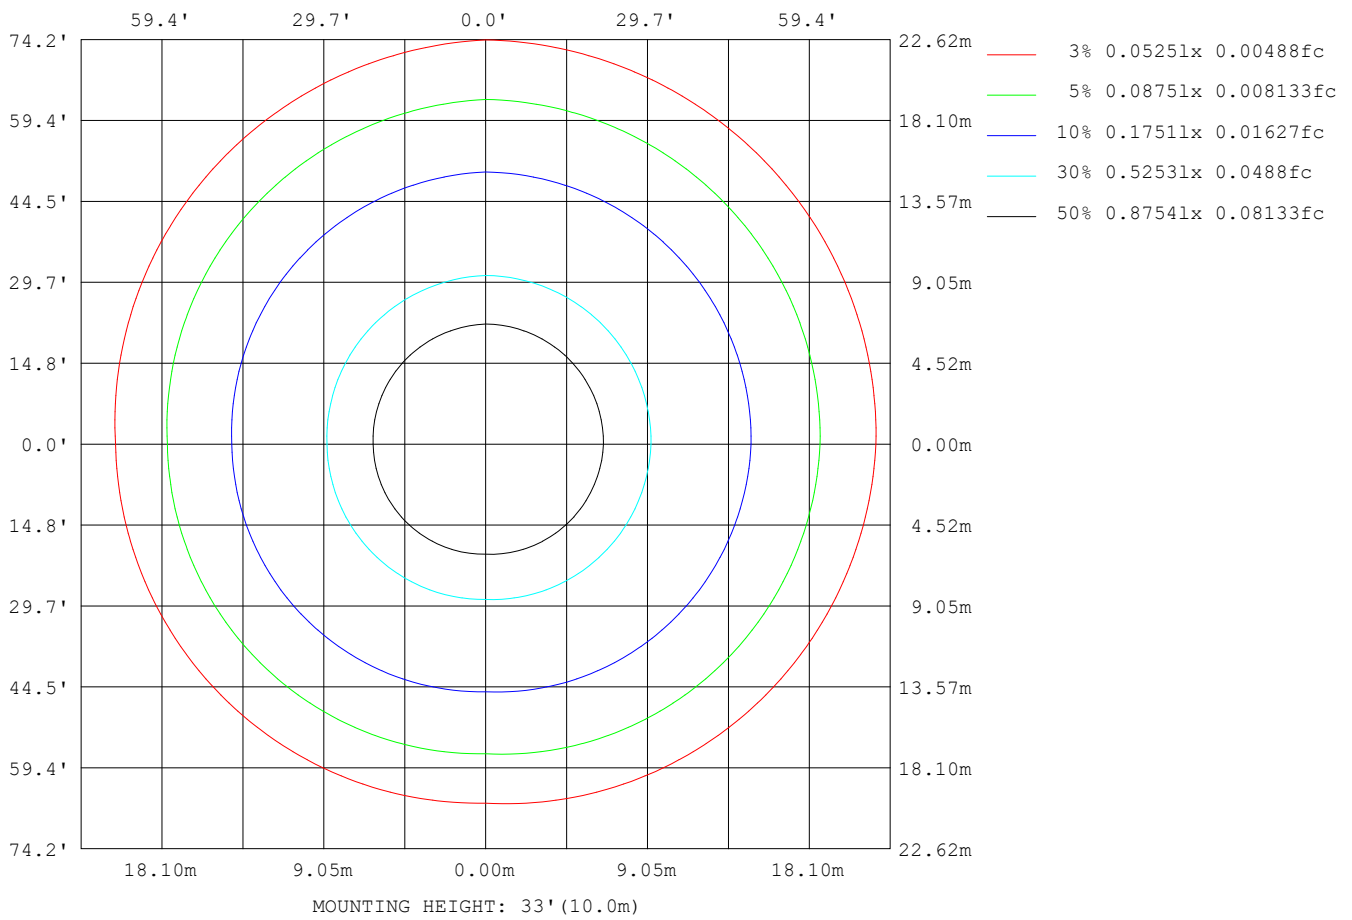

C Range: 0 - 360DEG  
 C Interval: 90.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Test Date:2023-05-21

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.444  
 Humidity:65.0%  
 Test Distance:8.700m [K=1.0000]  
 Remarks:

**LED Avg.L Report**

Test:U:24.001V I:0.2390A P:5.7362W PF:1.0000 Freq:0Hz Lamp Flux:536.15x1 lm		
NAME: UB-AT1-DYN276295C	TYPE: LED Strip	WEIGHT:
SPEC.: 5.75W	DIM.: 1000*10*2 (MM)	SERIAL No.: 001
MFR.: Flexfire LEDs, Inc.	SUR.: 0.01*1	Shielding Angle: 120


AvgL	cd/m2
L_0~180 (65) av	15974
L_0~180 (75) av	13918
L_0~180 (85) av	10831
L_90~270 (65) av	16230
L_90~270 (75) av	15420
L_90~270 (85) av	18801
L_45 (65) av	16041
L_45 (75) av	14724
L_45 (85) av	15560

Standard: GB/T 29293-2012

C Range: 0 - 360DEG  
 C Interval: 90.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Test Date:2023-05-21

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.444  
 Humidity:65.0%  
 Test Distance:8.700m [K=1.0000]  
 Remarks:

Planar Illuminance Curve

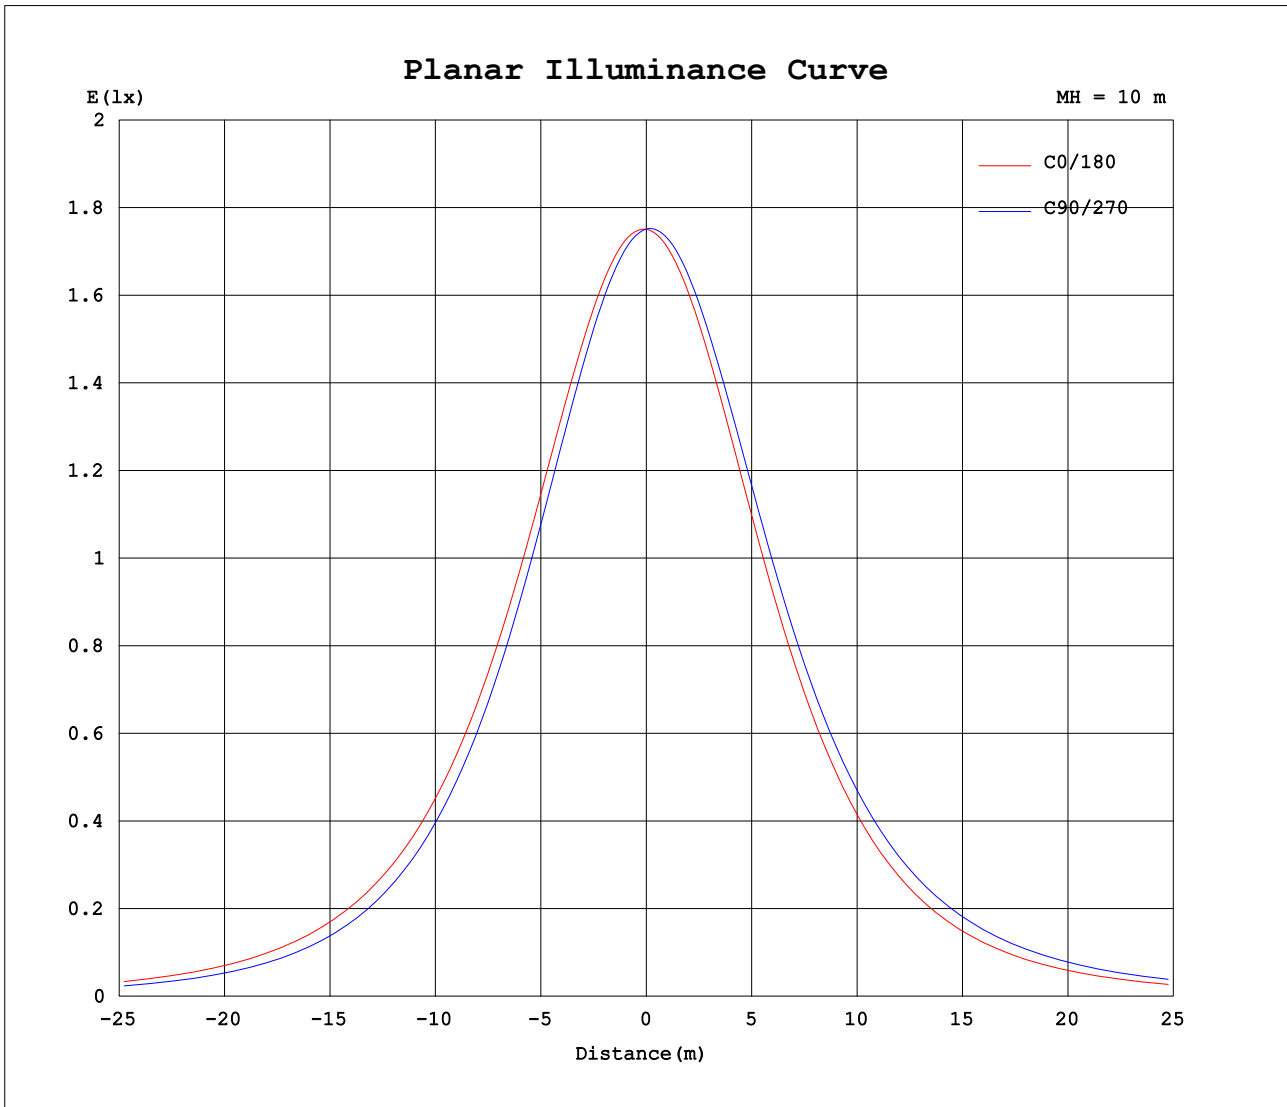

C Range: 0 - 360DEG  
 C Interval: 90.0DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Test Date: 2023-05-21

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 1.0DEG  
 Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.00.444  
 Humidity: 65.0%  
 Test Distance: 8.700m [K=1.0000]  
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:24.001V I:0.2390A P:5.7362W PF:1.0000 Freq:0Hz Lamp Flux:536.15x1 lm		
NAME: UB-AT1-DYN276295C	TYPE: LED Strip	WEIGHT:
SPEC.: 5.75W	DIM.: 1000*10*2 (MM)	SERIAL No.: 001
MFR.: Flexfire LEDs, Inc.	SUR.: 0.01*1	Shielding Angle: 120

Table--1

UNIT: cd

C (DEG) \ γ (DEG)	0	90	180	270															
0	175	175	175	175															
5	175	173	174	176															
10	174	170	171	175															
15	171	166	167	173															
20	167	160	162	169															
25	162	153	156	165															
30	155	145	148	159															
35	147	135	139	151															
40	138	124	129	143															
45	128	112	117	133															
50	116	98.8	105	122															
55	103	84.7	91.0	110															
60	89.0	69.8	76.4	96.6															
65	73.8	54.6	61.2	82.5															
70	57.9	40.2	45.7	67.7															
75	41.5	27.2	30.5	52.6															
80	26.4	16.2	16.8	37.9															
85	13.0	7.97	5.93	24.8															
90	2.45	3.23	0.20	14.3															
95	0.17	1.50	0.22	7.66															
100	0.18	0.54	0.27	3.37															
105	0.19	0.32	0.32	0.53															
110	0.20	0.38	0.38	0.30															
115	0.25	0.42	0.44	0.31															
120	0.32	0.49	0.50	0.32															
125	0.37	0.52	0.55	0.34															
130	0.41	0.57	0.58	0.38															
135	0.49	0.61	0.63	0.45															
140	0.54	0.66	0.67	0.54															
145	0.56	0.68	0.70	0.56															
150	0.59	0.72	0.70	0.58															
155	0.64	0.74	0.70	0.60															
160	0.70	0.76	0.71	0.64															
165	0.72	0.76	0.73	0.71															
170	0.74	0.76	0.74	0.75															
175	0.76	0.76	0.76	0.76															
180	0.76	0.76	0.81	0.83															

C Range: 0 - 360DEG  
 C Interval: 90.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Test Date:2023-05-21

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.444  
 Humidity:65.0%  
 Test Distance:8.700m [K=1.0000]  
 Remarks: