


TEST: U:12.00V I: 1.612A P: 19.32W PF: 1.000 Lamp Flux: 1431.56x1 lm			
NAME:	UB-CRI-NW-12V	TYPE:	Strip
WEIGHT:			0.01kg
DIM.:	1000*10*2 (MM)	SPEC:	19.2W
SERIAL N°:			01
MFR:	Flexfire LEDs, Inc.	SUR.:	1000*10 (MM)
PROJECTION ANGLE:			120


LAMP DATA	
MODEL	SMD 3020 / CRI 93 / LED
NOMINAL POWER (W)	19.32
RATED VOLTAGE (V)	12
NOMINAL FLUX (lm)	1431.56
LAMPS INSIDE	1
TEST VOLTAGE (V)	12.0

PHOTOMETRIC DATA Eff: 74.10 lm/W			
Imax (cd)	494.6	S/MH (C0/180)	1.29
LOR (%)	100.0	S/MH (C90/270)	1.27
TOTAL FLUX (lm)	1431.6	n UP,DN (C0-180)	0.0, 50.7
CIE CLASS	DIRECT	n UP,DN (C180-360)	0.0, 49.3
n up (%)	0.0	CIBSE SHR NOM	1.25
n down (%)	100.0	CIBSE SHR MAX	1.35


PHOTOMETRIC SPECTRUM

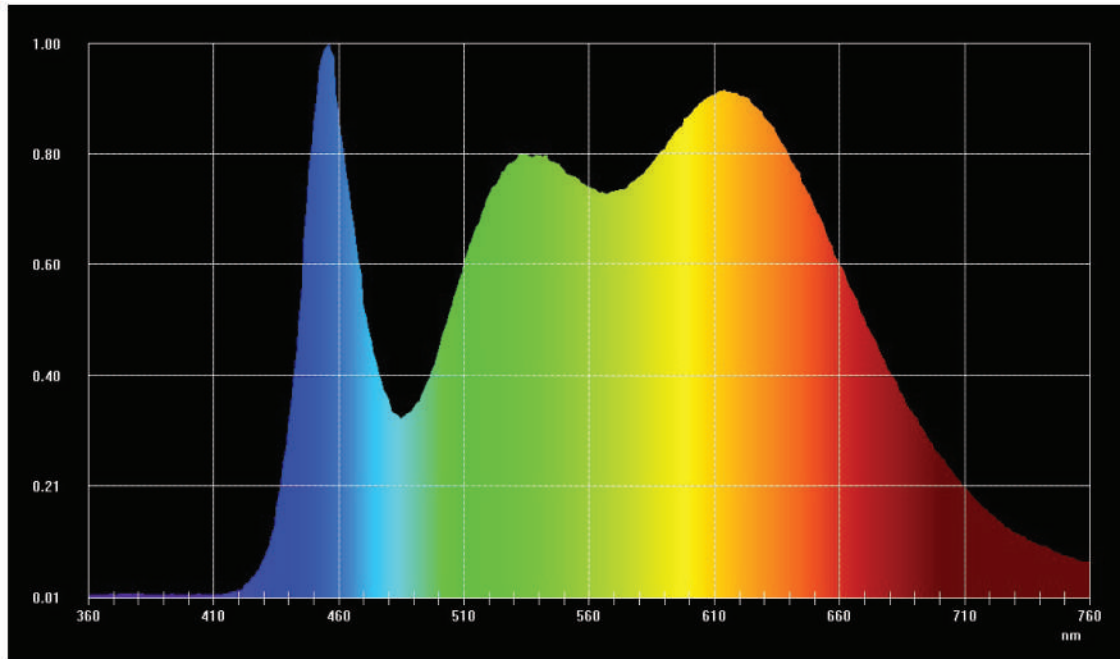


CHROMATICITY DIAGRAM (CIE 31)

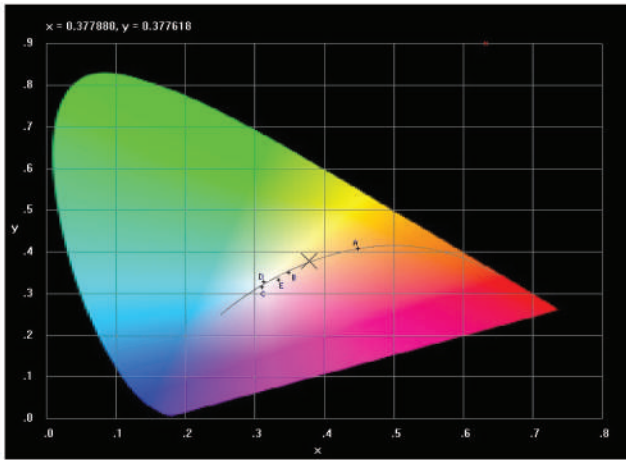


COLOR RENDERING INDEX (CRI) R-Values

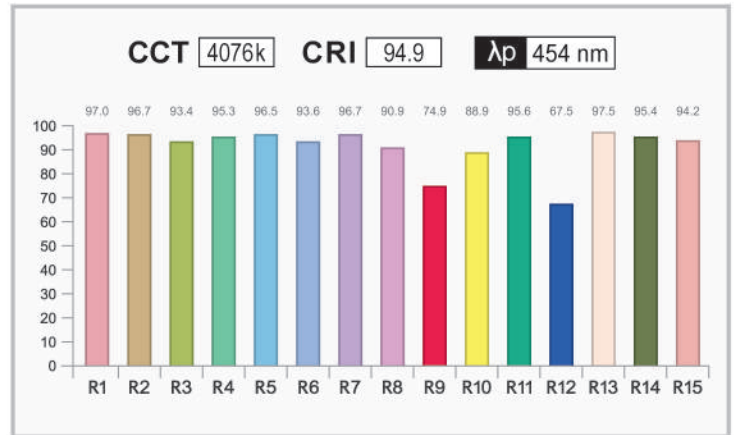

CONE LUX DIAGRAM

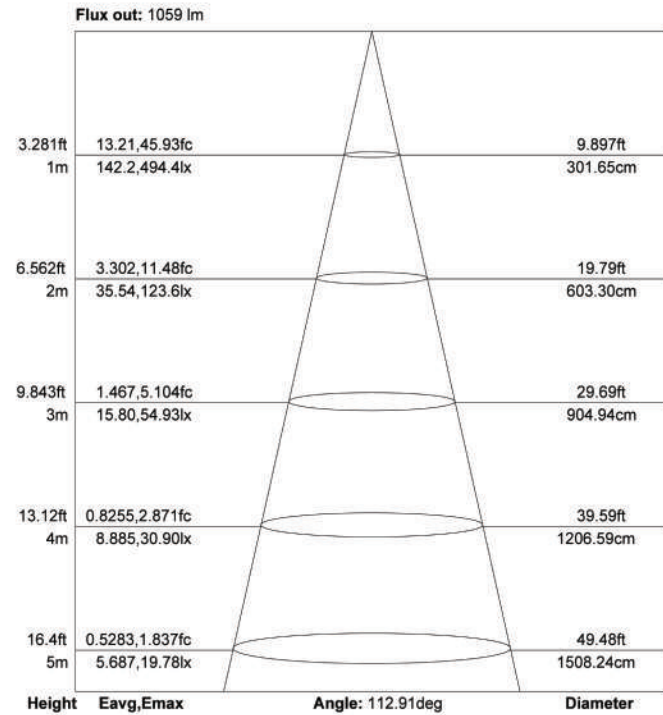

ISOCANDELA DIAGRAM

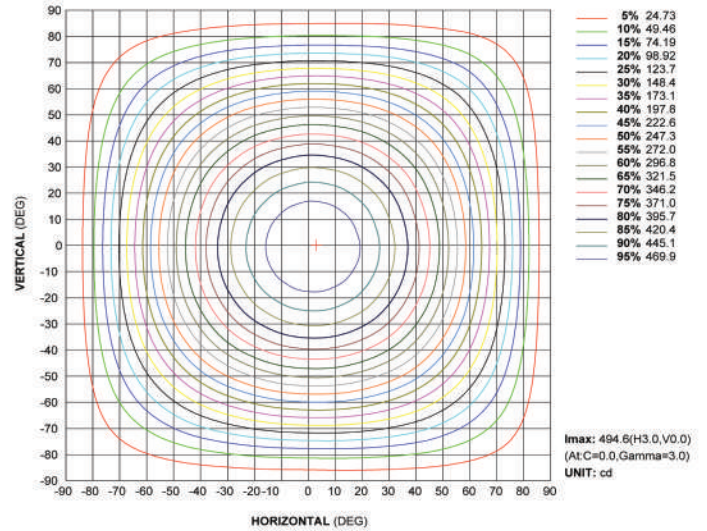

NOTE: The curves indicate the illuminated area and the average illumination when the luminaire is at different distances.

Results may vary from test to test.
Full test data available upon request.
Each test is conducted in a controlled environment.