
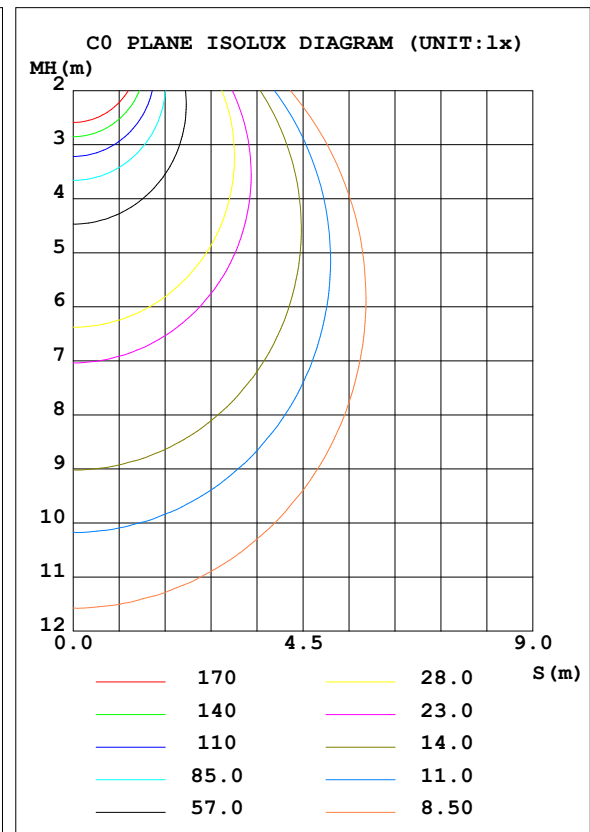


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:24.001V I:0.9676A P:23.223W PF:1.0000 Freq:0Hz Lamp Flux:3394.02x1 lm		
NAME: UB-IS-35K90C	TYPE: LED Strip	WEIGHT:
SPEC.: 21.7W	DIM.: 1000*10*2 (MM)	SERIAL No.: 001
MFR.: Flexfire LEDs, Inc.	SUR.: 0.01*1.073	Shielding Angle: 120

DATA OF LAMP		PHOTOMETRIC DATA Eff: 146.15 lm/W			
MODEL		I <sub>max</sub> (cd)	1141	S/MH (C0/180)	1.29
NOMINAL POWER (W)		LOR (%)	100.0	S/MH (C90/270)	1.30
RATED VOLTAGE (V)		TOTAL FLUX (lm)	3394.0	η UP, DN (C0-180)	0.3, 49.0
NOMINAL FLUX (lm)	3394.02	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.4, 50.2
LAMPS INSIDE	1	η up (%)	0.7	CIBSE SHR NOM	1.25
TEST VOLTAGE (V)		η down (%)	99.3	CIBSE SHR MAX	1.35

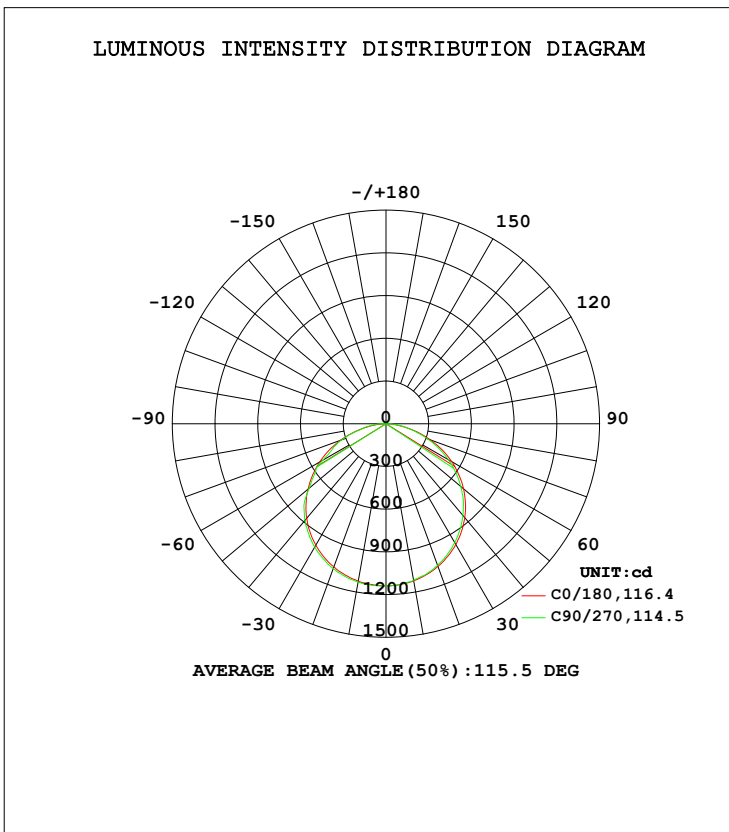

C Range: 0 - 360DEG  
 C Interval: 90.0DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Test Date: 2023-08-07

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.00.444  
 Humidity: 65.0%  
 Test Distance: 8.700m [K=1.0000]  
 Remarks:

**ZONAL FLUX DIAGRAM**

ZONAL FLUX DIAGRAM:


$\gamma$	C0	C90	C180	C270				$\gamma$	$\Phi$ zone	$\Phi$ total	%lum, lamp
10	1119	1115	1122	1129				0- 10	107.9	107.9	3.18,3.18
20	1066	1058	1070	1083				10- 20	310.7	418.6	12.3,12.3
30	980.3	966.2	985.8	1000				20- 30	475.0	893.6	26.3,26.3
40	860.8	840.5	866.6	884.5				30- 40	579.9	1474	43.4,43.4
50	711.9	685.7	713.5	704.9				40- 50	608.9	2082	61.4,61.4
60	534.1	507.0	538.4	511.5				50- 60	551.3	2634	77.6,77.6
70	331.2	310.8	340.0	327.7				60- 70	420.4	3054	90,90
80	132.5	128.0	137.2	153.9				70- 80	241.3	3295	97.1,97.1
90	7.226	16.12	1.720	35.47				80- 90	73.55	3369	99.3,99.3
100	1.633	2.635	1.663	5.343				90-100	7.174	3376	99.5,99.5
110	2.105	2.551	2.267	2.365				100-110	2.475	3379	99.5,99.5
120	2.807	2.759	2.932	2.894				110-120	2.536	3381	99.6,99.6
130	3.497	3.450	3.610	3.583				120-130	2.864	3384	99.7,99.7
140	4.076	4.139	4.164	4.212				130-140	2.989	3387	99.8,99.8
150	4.606	4.671	4.791	4.766				140-150	2.788	3390	99.9,99.9
160	5.025	5.111	5.185	5.246				150-160	2.271	3392	99.9,99.9
170	5.296	5.419	5.444	5.653				160-170	1.498	3394	100,100
180	5.481	5.665	5.481	5.715				170-180	0.5262	3394	100,100
DEG	LUMINOUS INTENSITY:cd								UNIT:lm		

C Range: 0 - 360DEG  
 C Interval: 90.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Test Date:2023-08-07

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.444  
 Humidity:65.0%  
 Test Distance:8.700m [K=1.0000]  
 Remarks:

**LUMINANCE LIMITATION CURVES**

Test:U:24.001V I:0.9676A P:23.223W PF:1.0000 Freq:0Hz Lamp Flux:3394.02x1 lm		
NAME: UB-IS-35K90C	TYPE: LED Strip	WEIGHT:
SPEC.: 21.7W	DIM.: 1000*10*2 (MM)	SERIAL No.: 001
MFR.: Flexfire LEDs, Inc.	SUR.: 0.01*1.073	Shielding Angle: 120

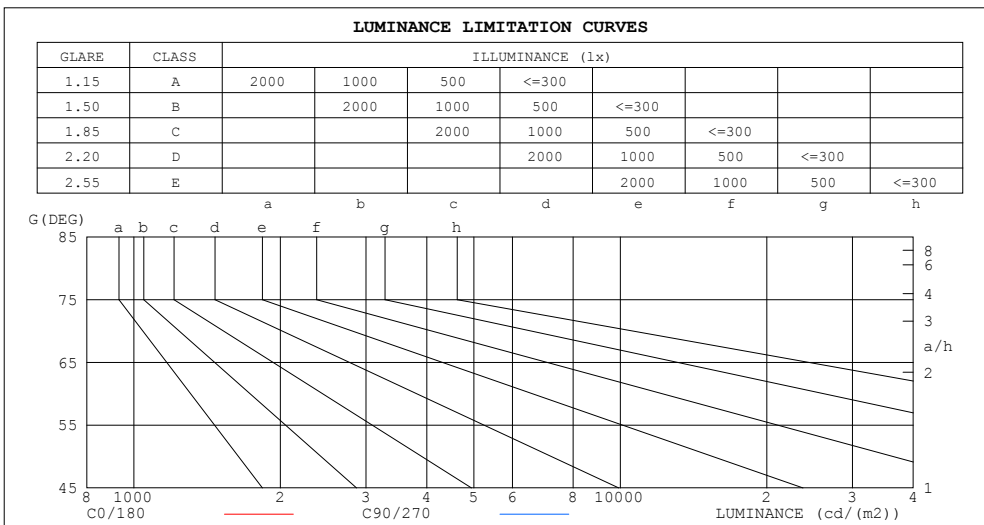

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	58756	64005
80	71104	68683
75	82619	77320
70	90256	84699
65	96369	90479
60	99560	94497
55	101564	97392
50	103223	99413
45	104065	101205


C Range: 0 - 360DEG  
 C Interval: 90.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Test Date:2023-08-07

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.444  
 Humidity:65.0%  
 Test Distance:8.700m [K=1.0000]  
 Remarks:

**CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM**

Test:U:24.001V I:0.9676A P:23.223W PF:1.0000 Freq:0Hz Lamp Flux:3394.02x1 lm		
NAME: UB-IS-35K90C	TYPE: LED Strip	WEIGHT:
SPEC.: 21.7W	DIM.: 1000*10*2 (MM)	SERIAL No.: 001
MFR.: Flexfire LEDs, Inc.	SUR.: 0.01*1.073	Shielding Angle: 120

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.01	1.01	1.01	.99
1.0	1.03	.99	.95	1.01	.97	.94	.97	.93	.90	.93	.90	.88	.89	.87	.85	.83
2.0	.90	.83	.77	.88	.82	.76	.84	.79	.74	.81	.76	.72	.78	.74	.71	.69
3.0	.79	.71	.64	.77	.70	.63	.74	.67	.62	.71	.66	.61	.69	.64	.60	.57
4.0	.70	.61	.54	.68	.60	.54	.66	.58	.53	.63	.57	.52	.61	.56	.51	.49
5.0	.62	.53	.46	.61	.52	.46	.59	.51	.45	.57	.50	.45	.55	.49	.44	.42
6.0	.56	.47	.40	.55	.46	.40	.53	.45	.40	.51	.44	.39	.50	.44	.39	.37
7.0	.51	.42	.36	.50	.41	.35	.48	.41	.35	.47	.40	.35	.45	.39	.34	.32
8.0	.46	.38	.32	.45	.37	.32	.44	.37	.31	.43	.36	.31	.41	.35	.31	.29
9.0	.42	.34	.28	.42	.34	.28	.40	.33	.28	.39	.33	.28	.38	.32	.28	.26
10.0	.39	.31	.26	.38	.31	.26	.37	.30	.26	.36	.30	.25	.35	.30	.25	.23

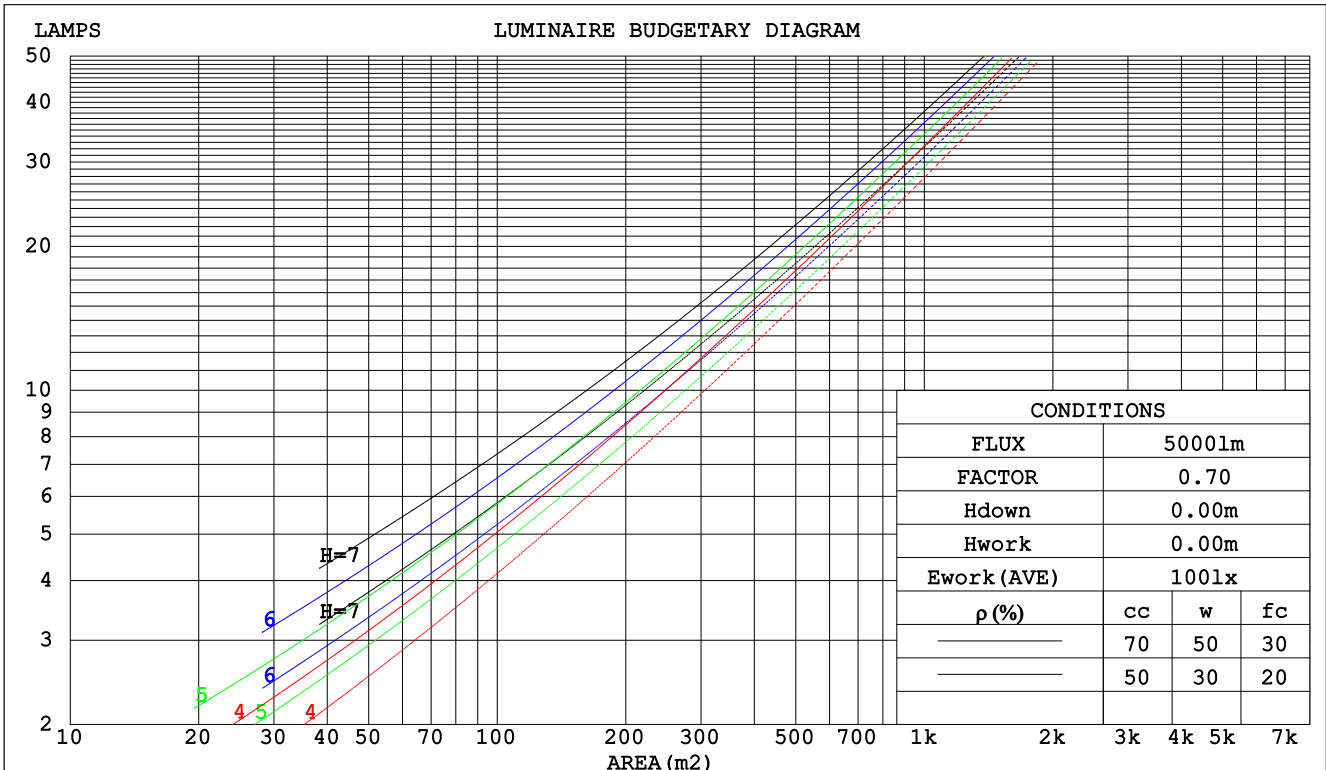

C Range: 0 - 360DEG  
 C Interval: 90.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Test Date:2023-08-07

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.444  
 Humidity:65.0%  
 Test Distance:8.700m [K=1.0000]  
 Remarks:

**WEC AND CCEC**

Test:U:24.001V I:0.9676A P:23.223W PF:1.0000 Freq:0Hz Lamp Flux:3394.02x1 lm									
NAME: UB-IS-35K90C				TYPE: LED Strip				WEIGHT:	
SPEC.: 21.7W				DIM.: 1000*10*2 (MM)				SERIAL No.: 001	
MFR.: Flexfire LEDs, Inc.				SUR.: 0.01*1.073				Shielding Angle: 120	

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.314	.179	.057	.307	.175	.056	.293	.168	.054	.281	.162	.052	.269	.156	.050	
2.0	.295	.161	.050	.288	.159	.049	.276	.154	.048	.265	.149	.047	.255	.144	.045	
3.0	.272	.145	.043	.266	.143	.043	.256	.139	.042	.246	.135	.041	.237	.131	.041	
4.0	.251	.130	.038	.246	.129	.038	.236	.125	.037	.227	.122	.037	.219	.119	.036	
5.0	.232	.118	.034	.227	.117	.034	.219	.114	.034	.211	.111	.033	.204	.109	.033	
6.0	.215	.108	.031	.211	.106	.031	.203	.104	.030	.196	.102	.030	.190	.100	.030	
7.0	.200	.099	.028	.196	.098	.028	.189	.096	.028	.183	.094	.027	.177	.092	.027	
8.0	.187	.091	.026	.183	.090	.026	.177	.089	.025	.172	.087	.025	.166	.085	.025	
9.0	.175	.085	.024	.172	.084	.024	.166	.082	.023	.161	.081	.023	.156	.079	.023	
10.0	.164	.079	.022	.162	.078	.022	.157	.077	.022	.152	.076	.021	.148	.074	.021	

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.196	.196	.196	.168	.168	.168	.114	.114	.114	.066	.066	.066	.021	.021	.021	
1.0	.186	.162	.140	.159	.139	.120	.109	.096	.083	.063	.055	.048	.020	.018	.016	
2.0	.178	.138	.103	.153	.118	.089	.105	.082	.062	.060	.048	.037	.019	.015	.012	
3.0	.171	.120	.080	.146	.104	.069	.100	.072	.048	.058	.042	.029	.019	.014	.009	
4.0	.163	.107	.064	.140	.092	.055	.096	.064	.039	.056	.038	.023	.018	.012	.008	
5.0	.156	.096	.053	.134	.083	.046	.092	.058	.032	.053	.034	.019	.017	.011	.006	
6.0	.148	.088	.045	.128	.076	.039	.088	.053	.028	.051	.031	.016	.016	.010	.005	
7.0	.142	.081	.039	.122	.070	.034	.084	.049	.024	.049	.029	.014	.016	.010	.005	
8.0	.135	.075	.034	.116	.065	.030	.080	.046	.021	.047	.027	.013	.015	.009	.004	
9.0	.129	.071	.031	.111	.061	.027	.077	.043	.019	.045	.025	.011	.015	.008	.004	
10.0	.123	.066	.028	.106	.058	.025	.074	.040	.017	.043	.024	.010	.014	.008	.003	

C Range: 0 - 360DEG  
 C Interval: 90.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Test Date:2023-08-07

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.444  
 Humidity:65.0%  
 Test Distance:8.700m [K=1.0000]  
 Remarks:

**UGR(Unified Glare Rating) Table**

Test:U:24.001V I:0.9676A P:23.223W PF:1.0000 Freq:0Hz Lamp Flux:3394.02x1 lm										
NAME: UB-IS-35K90C					TYPE: LED Strip			WEIGHT:		
SPEC.: 21.7W					DIM.: 1000*10*2 (MM)			SERIAL No.: 001		
MFR.: Flexfire LEDs, Inc.					SUR.: 0.01*1.073			Shielding Angle: 120		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	24.7	26.2	24.9	26.4	26.6	24.5	26.0	24.8	26.2	26.4
3H	26.2	27.6	26.5	27.9	28.1	26.0	27.4	26.3	27.6	27.9
4H	26.8	28.1	27.1	28.4	28.7	26.5	27.9	26.9	28.1	28.4
6H	27.2	28.5	27.5	28.7	29.0	26.9	28.2	27.3	28.5	28.8
8H	27.3	28.5	27.7	28.8	29.1	27.1	28.3	27.4	28.6	28.9
12H	27.4	28.5	27.7	28.9	29.2	27.1	28.3	27.5	28.6	28.9
4H 2H	25.3	26.6	25.6	26.9	27.1	25.1	26.5	25.4	26.7	27.0
3H	27.0	28.1	27.3	28.4	28.8	26.8	27.9	27.1	28.3	28.6
4H	27.7	28.8	28.1	29.1	29.4	27.5	28.5	27.8	28.9	29.2
6H	28.2	29.2	28.6	29.5	29.9	28.0	28.9	28.4	29.3	29.7
8H	28.4	29.3	28.8	29.6	30.0	28.2	29.0	28.6	29.4	29.8
12H	28.5	29.3	28.9	29.7	30.1	28.3	29.1	28.7	29.5	29.9
8H 4H	27.9	28.8	28.3	29.2	29.6	27.7	28.6	28.1	29.0	29.4
6H	28.6	29.3	29.0	29.7	30.2	28.4	29.1	28.8	29.5	30.0
8H	28.8	29.5	29.3	29.9	30.4	28.6	29.3	29.1	29.7	30.2
12H	29.0	29.6	29.5	30.0	30.5	28.8	29.4	29.3	29.9	30.4
12H 4H	27.9	28.7	28.4	29.1	29.6	27.7	28.5	28.2	28.9	29.4
6H	28.6	29.3	29.1	29.7	30.2	28.4	29.1	28.9	29.5	30.0
8H	28.9	29.5	29.4	29.9	30.4	28.7	29.3	29.2	29.8	30.3
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 0.1 / - 0.2					+ 0.2 / - 0.2				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				
2.0H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				

CIE Pub.117, 3394 lm Total Lamp Luminous Flux Correct (8log(F/F0) = 4.2)  
 Area: 0.01073 m2

C Range: 0 - 360DEG  
 C Interval: 90.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Test Date:2023-08-07

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.444  
 Humidity:65.0%  
 Test Distance:8.700m [K=1.0000]  
 Remarks:

**UTILIZATION FACTORS TABLE**

Test:U:24.001V I:0.9676A P:23.223W PF:1.0000 Freq:0Hz Lamp Flux:3394.02x1 lm		
NAME: UB-IS-35K90C	TYPE: LED Strip	WEIGHT:
SPEC.: 21.7W	DIM.: 1000*10*2 (MM)	SERIAL No.: 001
MFR.: Flexfire LEDs, Inc.	SUR.: 0.01*1.073	Shielding Angle: 120


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	57	45	38	56	45	38	55	44	38	31
0.80	67	55	48	66	55	47	64	54	47	40
1.00	75	64	57	74	63	56	72	65	56	49
1.25	82	72	65	81	71	64	78	70	63	56
1.50	87	77	70	86	76	70	83	75	69	61
2.00	94	86	79	92	84	78	89	82	77	69
2.50	98	90	84	96	89	83	92	86	81	73
3.00	102	95	89	99	93	88	95	90	86	77
4.00	106	100	95	103	98	94	99	95	91	82
5.00	108	103	99	106	101	97	101	98	94	85
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG  
 C Interval: 90.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Test Date:2023-08-07

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.444  
 Humidity:65.0%  
 Test Distance:8.700m [K=1.0000]  
 Remarks:

ISOCANDELA DIAGRAM

Test:U:24.001V I:0.9676A P:23.223W PF:1.0000 Freq:0Hz Lamp Flux:3394.02x1 lm		
NAME: UB-IS-35K90C	TYPE: LED Strip	WEIGHT:
SPEC.: 21.7W	DIM.: 1000*10*2 (MM)	SERIAL No.: 001
MFR.: Flexfire LEDs, Inc.	SUR.: 0.01*1.073	Shielding Angle: 120

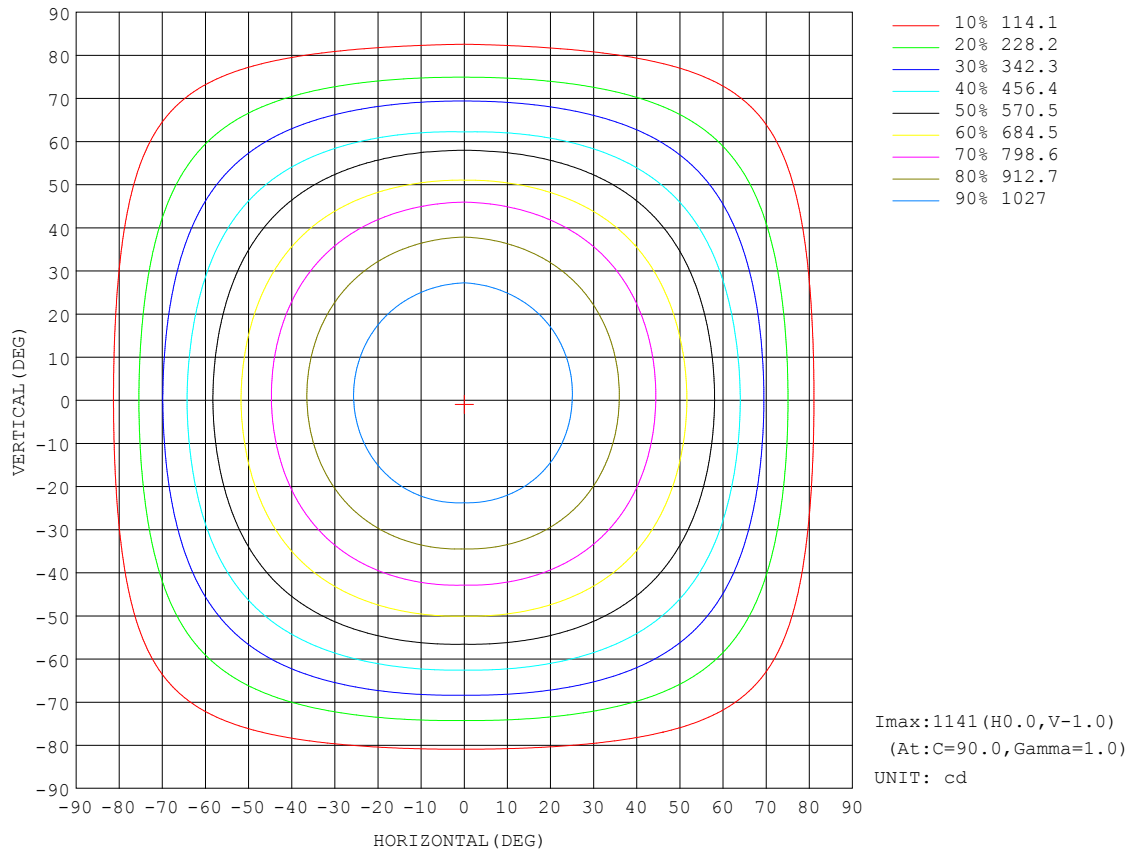


C Range: 0 - 360DEG  
 C Interval: 90.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Test Date:2023-08-07

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.444  
 Humidity:65.0%  
 Test Distance:8.700m [K=1.0000]  
 Remarks:



**AAI Figure**

Test:U:24.001V I:0.9676A P:23.223W PF:1.0000 Freq:0Hz Lamp Flux:3394.02x1 lm		
NAME: UB-IS-35K90C	TYPE: LED Strip	WEIGHT:
SPEC.: 21.7W	DIM.: 1000*10*2 (MM)	SERIAL No.: 001
MFR.: Flexfire LEDs, Inc.	SUR.: 0.01*1.073	Shielding Angle: 120

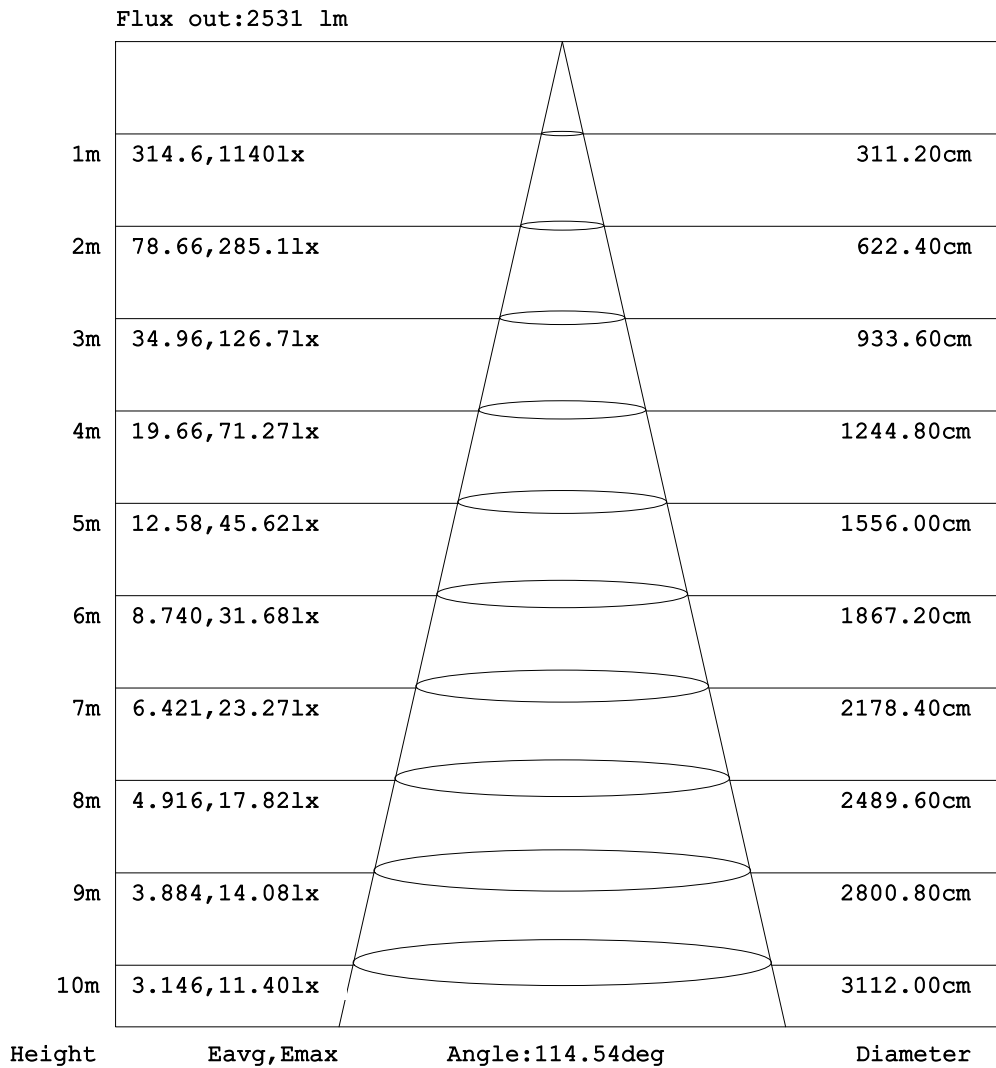


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG  
 C Interval: 90.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Test Date:2023-08-07

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.444  
 Humidity:65.0%  
 Test Distance:8.700m [K=1.0000]  
 Remarks:

**ISOLUX DIAGRAM**

Test:U:24.001V I:0.9676A P:23.223W PF:1.0000 Freq:0Hz Lamp Flux:3394.02x1 lm		
NAME: UB-IS-35K90C	TYPE: LED Strip	WEIGHT:
SPEC.: 21.7W	DIM.: 1000*10*2 (MM)	SERIAL No.: 001
MFR.: Flexfire LEDs, Inc.	SUR.: 0.01*1.073	Shielding Angle: 120

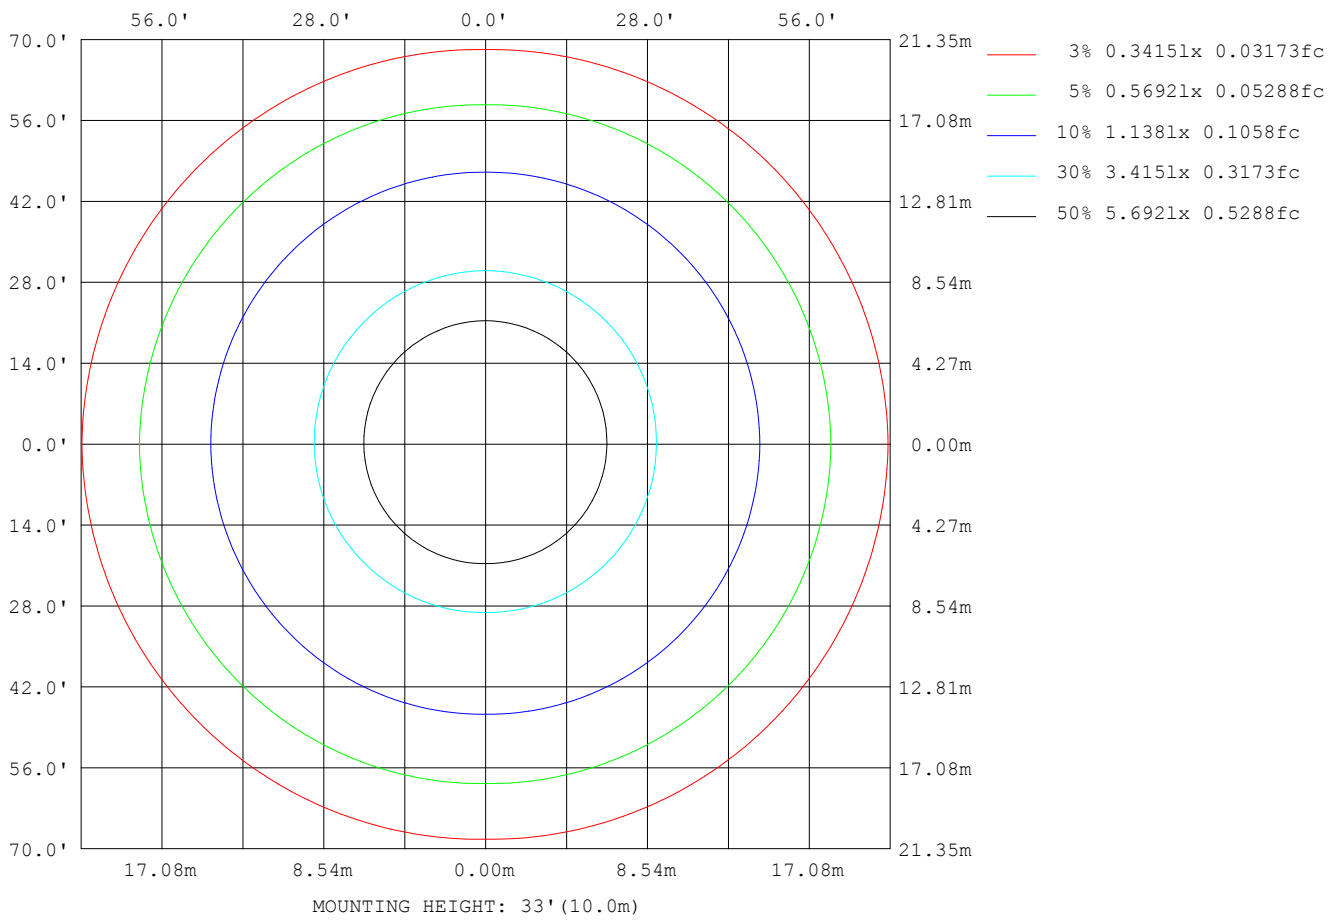

C Range: 0 - 360DEG  
 C Interval: 90.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Test Date:2023-08-07

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.444  
 Humidity:65.0%  
 Test Distance:8.700m [K=1.0000]  
 Remarks:

**LED Avg.L Report**

Test:U:24.001V I:0.9676A P:23.223W PF:1.0000 Freq:0Hz Lamp Flux:3394.02x1 lm		
NAME: UB-IS-35K90C	TYPE: LED Strip	WEIGHT:
SPEC.: 21.7W	DIM.: 1000*10*2 (MM)	SERIAL No.: 001
MFR.: Flexfire LEDs, Inc.	SUR.: 0.01*1.073	Shielding Angle: 120


AvgL	cd/m2
L_0~180 (65) av	96904
L_0~180 (75) av	84011
L_0~180 (85) av	59897
L_90~270 (65) av	90780
L_90~270 (75) av	79296
L_90~270 (85) av	74707
L_45 (65) av	93110
L_45 (75) av	81151
L_45 (85) av	69224

Standard: GB/T 29293-2012

C Range: 0 - 360DEG  
 C Interval: 90.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Test Date:2023-08-07

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.444  
 Humidity:65.0%  
 Test Distance:8.700m [K=1.0000]  
 Remarks:

Planar Illuminance Curve

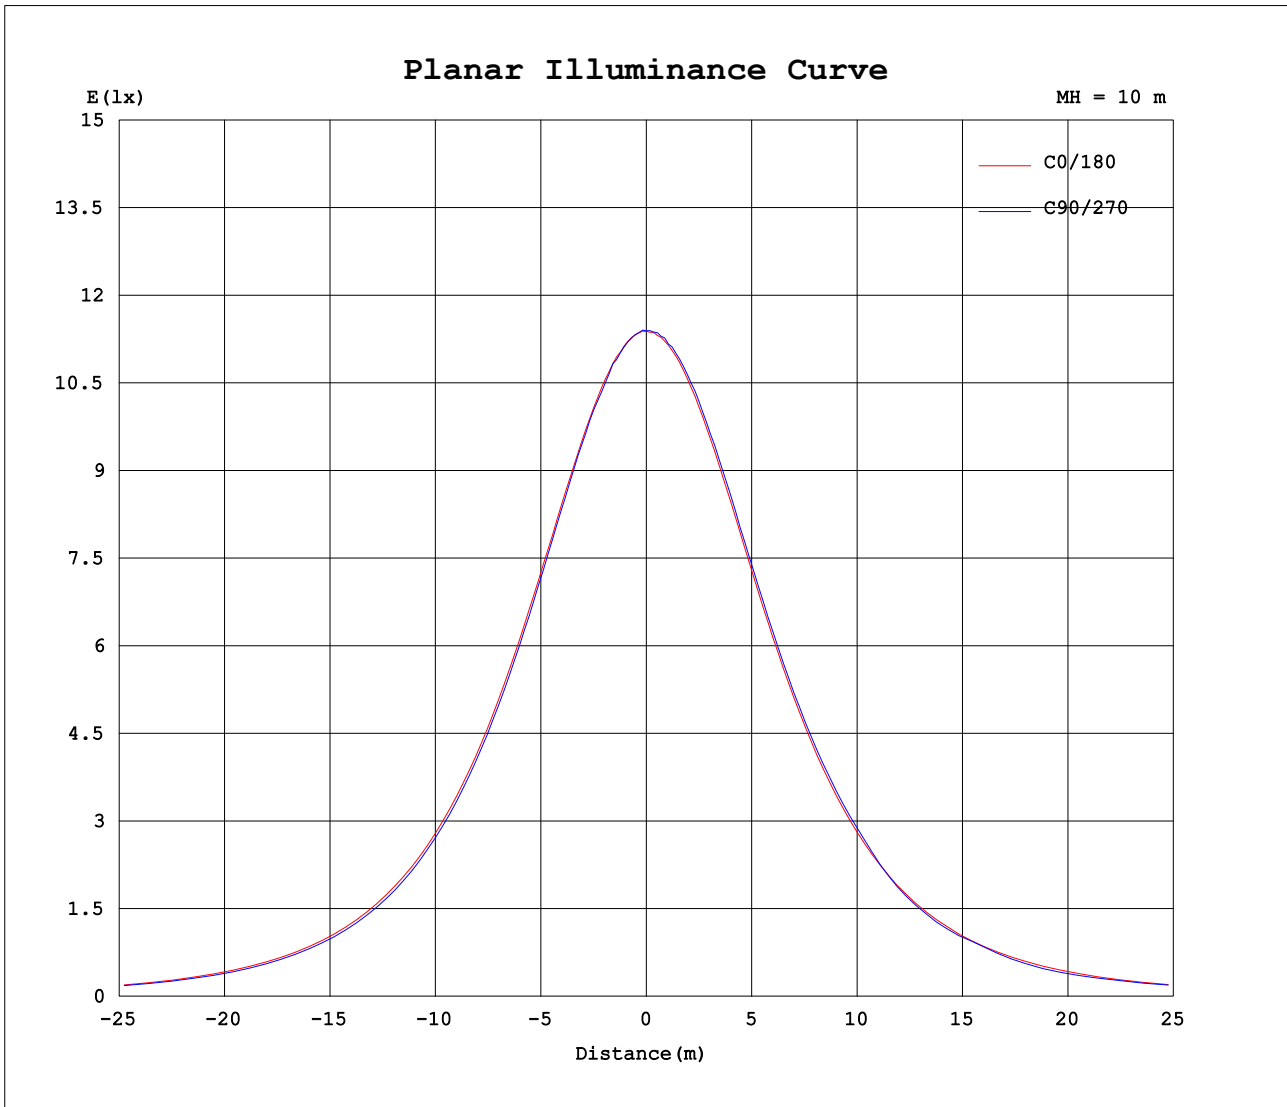

C Range: 0 - 360DEG  
 C Interval: 90.0DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Test Date: 2023-08-07

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 1.0DEG  
 Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.00.444  
 Humidity: 65.0%  
 Test Distance: 8.700m [K=1.0000]  
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:24.001V I:0.9676A P:23.223W PF:1.0000 Freq:0Hz Lamp Flux:3394.02x1 lm		
NAME: UB-IS-35K90C	TYPE: LED Strip	WEIGHT:
SPEC.: 21.7W	DIM.: 1000*10*2 (MM)	SERIAL No.: 001
MFR.: Flexfire LEDs, Inc.	SUR.: 0.01*1.073	Shielding Angle: 120

Table--1

UNIT: cd

C (DEG) \ γ (DEG)	0	90	180	270															
0	1138	1139	1138	1139															
5	1134	1133	1134	1140															
10	1119	1115	1122	1129															
15	1098	1094	1101	1110															
20	1066	1058	1070	1083															
25	1027	1016	1032	1046															
30	980	966	986	1000															
35	924	906	930	945															
40	861	840	867	885															
45	790	768	794	816															
50	712	686	713	705															
55	625	599	630	611															
60	534	507	538	512															
65	437	410	442	413															
70	331	311	340	328															
75	229	215	237	226															
80	132	128	137	154															
85	54.9	59.9	57.1	79.9															
90	7.23	16.1	1.72	35.5															
95	1.63	4.11	1.45	15.5															
100	1.63	2.64	1.66	5.34															
105	1.75	2.57	1.96	2.55															
110	2.10	2.55	2.27	2.36															
115	2.44	2.57	2.59	2.59															
120	2.81	2.76	2.93	2.89															
125	3.15	3.06	3.29	3.26															
130	3.50	3.45	3.61	3.58															
135	3.83	3.83	3.93	3.92															
140	4.08	4.14	4.16	4.21															
145	4.33	4.40	4.57	4.51															
150	4.61	4.67	4.79	4.77															
155	4.85	4.87	5.00	5.01															
160	5.02	5.11	5.19	5.25															
165	5.17	5.26	5.32	5.47															
170	5.30	5.42	5.44	5.65															
175	5.46	5.51	5.48	5.71															
180	5.48	5.67	5.48	5.71															

C Range: 0 - 360DEG  
 C Interval: 90.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Test Date:2023-08-07

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.444  
 Humidity:65.0%  
 Test Distance:8.700m [K=1.0000]  
 Remarks: