
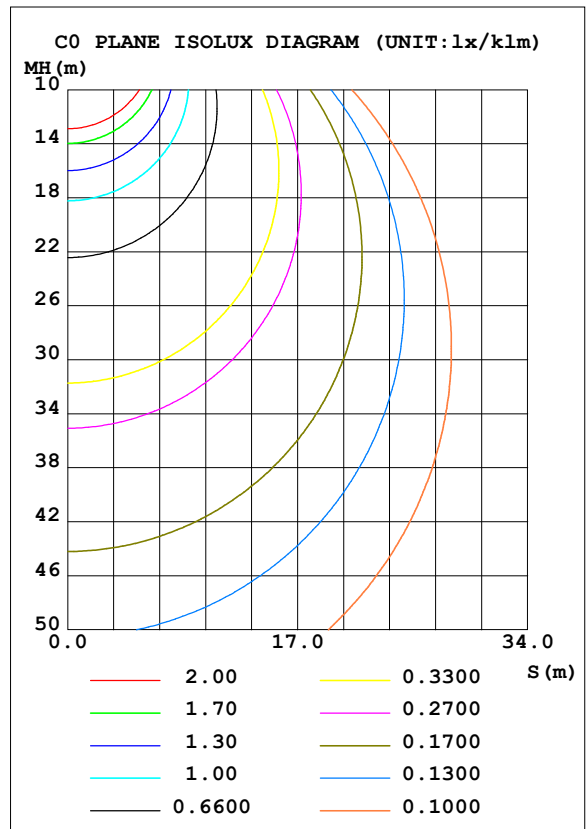


**LUMINAIRE PHOTOMETRIC TEST REPORT**

Test:U:24.000V I:0.9005A P:21.611W PF:1.0000 Freq:0Hz Lamp Flux:2852.79x1 lm		
NAME: UB-RS-50K95C	TYPE:LED Strip	WEIGHT:Kg
SPEC.:21.6W	DIM.: 1000*10*2(MM)	SERIAL No.:001
MFR.: Flexfire LEDs, Inc.	SUR.:1000*10(MM)	Shielding Angle:120

DATA OF LAMP		PHOTOMETRIC DATA Eff: 132.01 lm/W			
MODEL	SMD /LED	I <sub>max</sub> (cd/klm)	332.8	S/MH(C0/180)	1.29
NOMINAL POWER(W)	21.61	LOR(%)	100.0	S/MH(C90/270)	1.28
RATED VOLTAGE(V)	24	TOTAL FLUX(lm/klm)	1000.00	η UP, DN(C0-180)	0.6,49.9
NOMINAL FLUX(lm)	2852.79	CIE CLASS	DIRECT	η UP, DN(C180-360)	0.5,49.0
LAMPS INSIDE	1	η up(%)	1.1	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	24	η down(%)	98.9	CIBSE SHR MAX	1.35

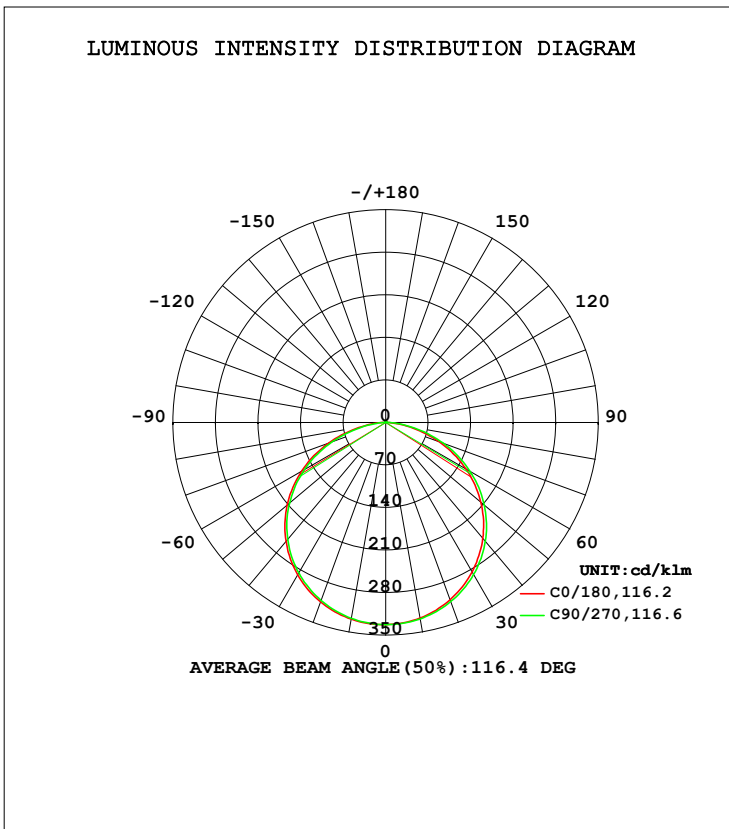

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.0DEG  
 Test Date:2020-5-8

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:7.000m [K=1.0000]

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


$\gamma$	C0	C45	C90	C135	C180	C225	C270	C315	$\gamma$	$\Phi$ zone	$\Phi$ total	%lum, lamp
10	326.6	327.4	328.2	328.7	328.6	327.7	327.2	326.8	0- 10	31.52	31.52	3.15,3.15
20	310.4	312.0	313.6	314.4	314.2	312.8	311.5	310.9	10- 20	90.72	122.2	12.2,12.2
30	284.3	286.9	289.2	289.9	289.7	287.8	286.1	285.0	20- 30	138.8	261.1	26.1,26.1
40	248.8	252.2	255.2	255.9	255.4	253.0	251.0	249.8	30- 40	169.6	430.7	43.1,43.1
50	204.5	208.5	212.0	212.6	211.7	209.0	206.7	205.6	40- 50	178.8	609.5	61,61
60	152.3	156.7	160.1	160.3	159.7	156.2	153.8	153.1	50- 60	164.1	773.6	77.4,77.4
70	93.75	98.18	101.4	101.3	100.4	96.67	93.66	94.10	60- 70	126.1	899.7	90,90
80	35.15	39.57	42.44	41.48	40.00	37.26	33.31	35.51	70- 80	70.90	970.6	97.1,97.1
90	0.9656	2.642	0.5413	2.894	1.240	2.456	0.5787	1.621	80- 90	18.05	988.6	98.9,98.9
100	0.9163	0.8555	0.9106	0.8934	0.7904	0.8658	0.8332	0.7520	90-100	1.021	989.7	99,99
110	1.299	1.266	1.365	1.357	1.121	1.257	1.224	1.141	100-110	1.100	990.8	99.1,99.1
120	1.767	1.665	1.807	1.815	1.540	1.690	1.634	1.548	110-120	1.456	992.2	99.2,99.2
130	2.219	2.158	2.222	2.247	2.014	2.142	2.057	1.999	120-130	1.713	993.9	99.4,99.4
140	2.588	2.518	2.565	2.595	2.427	2.532	2.450	2.379	130-140	1.793	995.7	99.6,99.6
150	2.981	2.884	2.889	2.930	2.859	2.901	2.796	2.769	140-150	1.685	997.4	99.7,99.7
160	3.264	3.133	3.098	3.150	3.124	3.055	3.002	3.009	150-160	1.381	998.8	99.9,99.9
170	3.436	3.294	3.214	3.276	3.275	3.240	3.145	3.170	160-170	0.9014	999.7	100,100
180	3.244	3.223	3.154	3.192	3.240	3.222	3.152	3.188	170-180	0.3099	1000.0	100,100
DEG	LUMINOUS INTENSITY:cd/klm									UNIT:lm/klm		

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.0DEG  
 Test Date:2020-5-8

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:7.000m [K=1.0000]

**LUMINANCE LIMITATION CURVES**

Test:U:24.000V I:0.9005A P:21.611W PF:1.0000 Freq:0Hz Lamp Flux:2852.79x1 lm		
NAME: UB-RS-50K95C	TYPE:LED Strip	WEIGHT:Kg
SPEC.:21.6W	DIM.: 1000*10*2 (MM)	SERIAL No.:001
MFR.: Flexfire LEDs, Inc.	SUR.:1000*10 (MM)	Shielding Angle:120

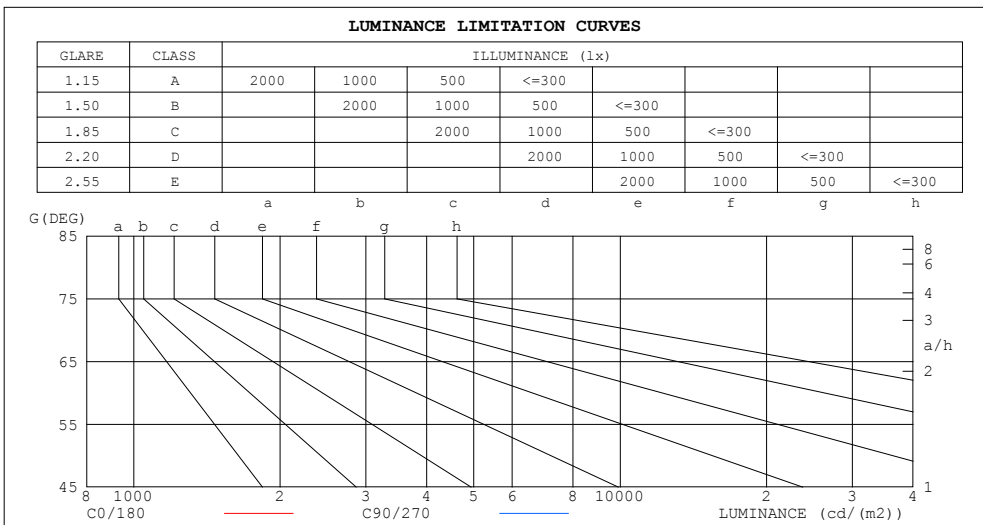

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	40031	60096
80	57676	69749
75	70078	78444
70	78094	84643
65	83291	88757
60	86784	91412
55	89069	93055
50	90656	94145
45	91768	94736


C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.0DEG  
 Test Date:2020-5-8

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:7.000m [K=1.0000]

**CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM**

Test:U:24.000V I:0.9005A P:21.611W PF:1.0000 Freq:0Hz Lamp Flux:2852.79x1 lm		
NAME: UB-RS-50K95C	TYPE:LED Strip	WEIGHT:Kg
SPEC.:21.6W	DIM.: 1000*10*2(MM)	SERIAL No.:001
MFR.: Flexfire LEDs, Inc.	SUR.:1000*10(MM)	Shielding Angle:120

pcc	80%			70%			50%			30%			10%			0
	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pw																0
pfc																0
RCR	RCR:Room Cavity Ratio			Coefficients of Utilization(CU)												
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.10	1.10	1.10	1.06	1.06	1.06	1.01	1.01	1.01	.99
1.0	1.04	.99	.95	1.01	.97	.94	.97	.93	.90	.93	.90	.87	.89	.87	.85	.82
2.0	.90	.83	.77	.88	.82	.76	.84	.79	.74	.81	.76	.72	.78	.74	.71	.68
3.0	.79	.71	.64	.77	.69	.63	.74	.67	.62	.71	.65	.61	.68	.64	.60	.57
4.0	.70	.61	.54	.68	.60	.54	.66	.58	.53	.63	.57	.52	.61	.55	.51	.49
5.0	.62	.53	.46	.61	.52	.46	.59	.51	.45	.57	.50	.45	.55	.49	.44	.42
6.0	.56	.47	.40	.55	.46	.40	.53	.45	.40	.51	.44	.39	.49	.43	.39	.37
7.0	.51	.42	.35	.50	.41	.35	.48	.40	.35	.46	.40	.35	.45	.39	.34	.32
8.0	.46	.37	.32	.45	.37	.31	.44	.36	.31	.43	.36	.31	.41	.35	.31	.29
9.0	.42	.34	.28	.42	.34	.28	.40	.33	.28	.39	.33	.28	.38	.32	.28	.26
10.0	.39	.31	.26	.38	.31	.26	.37	.30	.25	.36	.30	.25	.35	.29	.25	.23

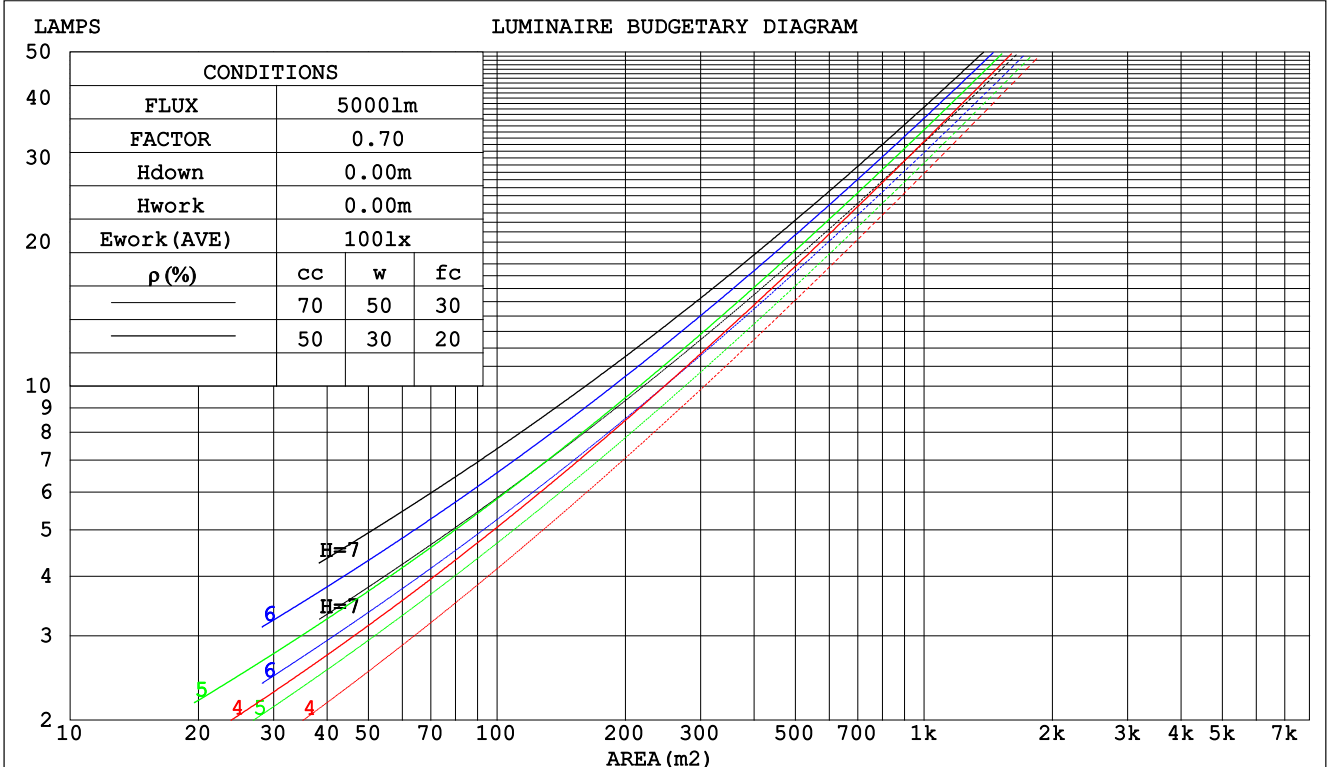

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.0DEG  
 Test Date:2020-5-8

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:7.000m [K=1.0000]

WEC AND CCEC

Test:U:24.000V I:0.9005A P:21.611W PF:1.0000 Freq:0Hz Lamp Flux:2852.79x1 lm								
NAME: UB-RS-50K95C			TYPE:LED Strip			WEIGHT:Kg		
SPEC.:21.6W			DIM.: 1000*10*2(MM)			SERIAL No.:001		
MFR.: Flexfire LEDs, Inc.			SUR.:1000*10(MM)			Shielding Angle:120		

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.311	.177	.056	.304	.173	.055	.290	.166	.053	.277	.160	.051	.265	.154	.050	
2.0	.294	.161	.049	.287	.158	.049	.275	.153	.047	.263	.148	.046	.253	.143	.045	
3.0	.272	.145	.043	.266	.142	.043	.255	.138	.042	.245	.134	.041	.235	.130	.040	
4.0	.251	.130	.038	.246	.129	.038	.236	.125	.037	.227	.122	.037	.218	.119	.036	
5.0	.232	.118	.034	.227	.117	.034	.218	.114	.033	.210	.111	.033	.203	.108	.033	
6.0	.215	.108	.031	.211	.106	.031	.203	.104	.030	.196	.102	.030	.189	.100	.030	
7.0	.200	.099	.028	.196	.098	.028	.189	.096	.028	.183	.094	.027	.177	.092	.027	
8.0	.187	.091	.026	.183	.090	.026	.177	.088	.025	.171	.087	.025	.166	.085	.025	
9.0	.175	.085	.024	.172	.084	.024	.166	.082	.023	.161	.081	.023	.156	.079	.023	
10.0	.164	.079	.022	.162	.078	.022	.157	.077	.022	.152	.075	.021	.147	.074	.021	

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.199	.199	.199	.170	.170	.170	.116	.116	.116	.067	.067	.067	.021	.021	.021	
1.0	.189	.165	.143	.162	.141	.123	.111	.097	.085	.064	.056	.049	.020	.018	.016	
2.0	.181	.141	.107	.155	.121	.092	.106	.084	.064	.061	.049	.038	.020	.016	.012	
3.0	.174	.123	.083	.149	.106	.072	.102	.074	.050	.059	.043	.030	.019	.014	.010	
4.0	.166	.110	.067	.143	.095	.058	.098	.066	.041	.057	.039	.024	.018	.013	.008	
5.0	.159	.100	.056	.136	.086	.049	.094	.060	.034	.054	.035	.020	.018	.012	.007	
6.0	.152	.091	.048	.130	.079	.042	.090	.055	.030	.052	.033	.018	.017	.011	.006	
7.0	.145	.084	.042	.125	.073	.037	.086	.051	.026	.050	.030	.015	.016	.010	.005	
8.0	.138	.079	.038	.119	.068	.033	.082	.048	.023	.048	.028	.014	.016	.009	.005	
9.0	.132	.074	.034	.114	.064	.030	.079	.045	.021	.046	.027	.013	.015	.009	.004	
10.0	.126	.069	.031	.109	.060	.027	.076	.042	.019	.044	.025	.012	.014	.008	.004	

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.0DEG  
 Test Date:2020-5-8

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:7.000m [K=1.0000]

**UGR(Unified Glare Rating) Table**

Test:U:24.000V I:0.9005A P:21.611W PF:1.0000 Freq:0Hz Lamp Flux:2852.79x1 lm										
NAME: UB-RS-50K95C					TYPE:LED Strip			WEIGHT:Kg		
SPEC.:21.6W					DIM.: 1000*10*2(MM)			SERIAL No.:001		
MFR.: Flexfire LEDs, Inc.					SUR.:1000*10(MM)			Shielding Angle:120		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	28.5	30.0	28.8	30.2	30.4	28.7	30.2	29.0	30.4	30.6
3H	30.0	31.4	30.3	31.6	31.9	30.3	31.7	30.6	31.9	32.2
4H	30.6	31.9	30.9	32.2	32.4	30.9	32.2	31.2	32.5	32.8
6H	30.9	32.2	31.3	32.5	32.8	31.3	32.6	31.7	32.9	33.2
8H	31.0	32.2	31.4	32.5	32.8	31.5	32.7	31.8	33.0	33.3
12H	31.0	32.2	31.4	32.5	32.8	31.5	32.7	31.9	33.0	33.4
4H 2H	29.1	30.5	29.5	30.7	31.0	29.3	30.6	29.6	30.9	31.2
3H	30.8	32.0	31.2	32.3	32.6	31.0	32.2	31.4	32.5	32.9
4H	31.5	32.6	31.9	32.9	33.3	31.8	32.9	32.2	33.2	33.6
6H	32.0	32.9	32.4	33.3	33.7	32.4	33.3	32.8	33.7	34.1
8H	32.1	33.0	32.5	33.4	33.8	32.5	33.4	33.0	33.8	34.2
12H	32.2	33.0	32.6	33.4	33.8	32.7	33.5	33.1	33.9	34.3
8H 4H	31.8	32.7	32.2	33.0	33.5	32.0	32.9	32.5	33.3	33.7
6H	32.4	33.1	32.8	33.5	34.0	32.7	33.5	33.2	33.9	34.4
8H	32.6	33.2	33.1	33.7	34.2	33.0	33.7	33.5	34.1	34.6
12H	32.7	33.3	33.2	33.7	34.2	33.2	33.8	33.7	34.2	34.7
12H 4H	31.8	32.6	32.2	33.0	33.4	32.0	32.9	32.5	33.3	33.7
6H	32.4	33.1	32.9	33.5	34.0	32.8	33.4	33.3	33.9	34.4
8H	32.7	33.2	33.2	33.7	34.2	33.1	33.6	33.6	34.1	34.6
Variations with the observer position at spacings:										
S = 1.0H	+ 0.2 / - 0.2					+ 0.1 / - 0.2				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				
2.0H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				

CIE Pub.117, 2853 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = 3.6)  
 Area: 0.01 m2

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.0DEG  
 Test Date:2020-5-8

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:7.000m [K=1.0000]

**UTILIZATION FACTORS TABLE**

Test:U:24.000V I:0.9005A P:21.611W PF:1.0000 Freq:0Hz Lamp Flux:2852.79x1 lm		
NAME: UB-RS-50K95C	TYPE:LED Strip	WEIGHT:Kg
SPEC.:21.6W	DIM.: 1000*10*2(MM)	SERIAL No.:001
MFR.: Flexfire LEDs, Inc.	SUR.:1000*10(MM)	Shielding Angle:120


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	57	45	38	56	45	38	55	44	37	31
0.80	67	55	47	66	54	47	64	54	47	40
1.00	75	64	56	74	63	56	71	65	56	48
1.25	82	72	64	81	71	64	78	69	63	56
1.50	87	77	70	86	76	70	82	74	68	61
2.00	94	86	79	92	84	78	89	82	77	68
2.50	98	90	84	96	89	83	92	86	81	73
3.00	102	95	89	99	93	88	95	90	86	77
4.00	106	100	95	103	98	94	99	95	91	82
5.00	108	103	99	106	101	98	101	97	94	85
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.0DEG  
 Test Date:2020-5-8

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:7.000m [K=1.0000]

**ISOCANDELA DIAGRAM**

Test:U:24.000V I:0.9005A P:21.611W PF:1.0000 Freq:0Hz Lamp Flux:2852.79x1 lm		
NAME: UB-RS-50K95C	TYPE:LED Strip	WEIGHT:Kg
SPEC.:21.6W	DIM.: 1000*10*2(MM)	SERIAL No.:001
MFR.: Flexfire LEDs, Inc.	SUR.:1000*10(MM)	Shielding Angle:120

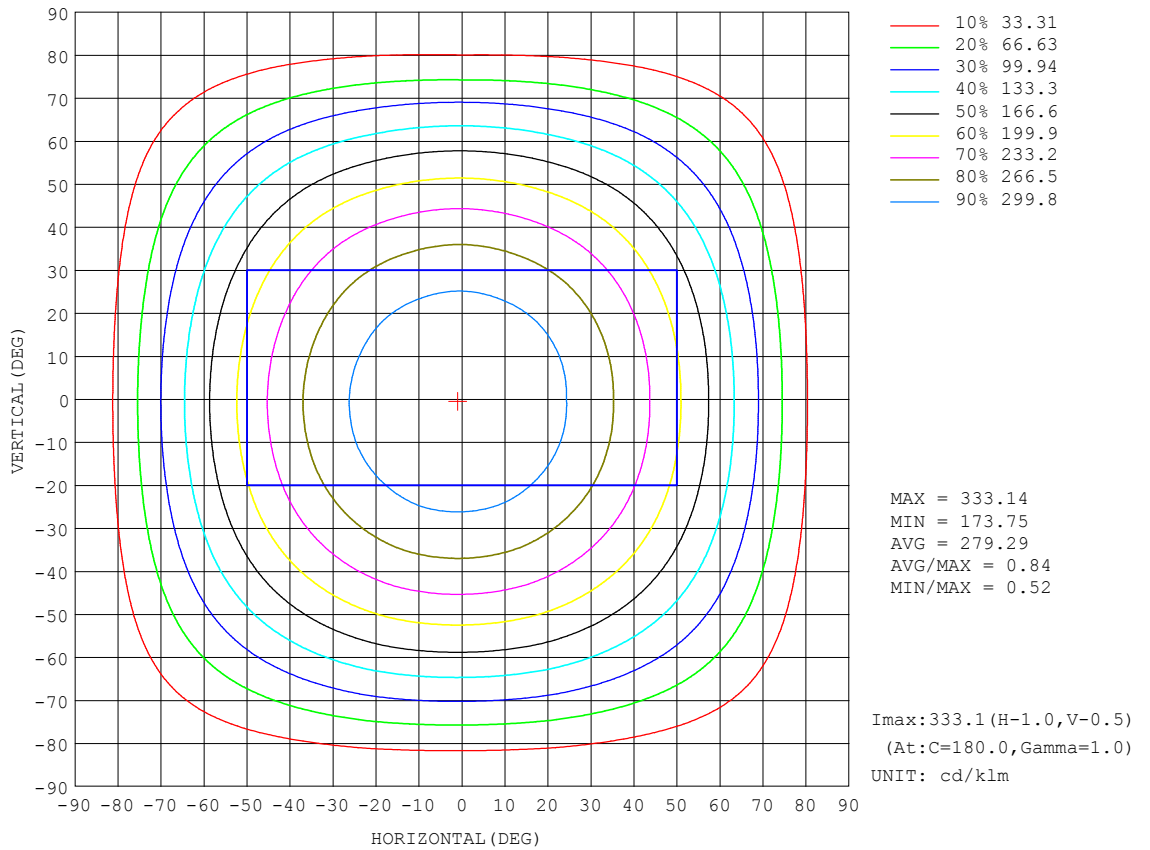


C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.0DEG  
 Test Date:2020-5-8

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:7.000m [K=1.0000]



**AAI Figure**

Test:U:24.000V I:0.9005A P:21.611W PF:1.0000 Freq:0Hz Lamp Flux:2852.79x1 lm		
NAME: UB-RS-50K95C	TYPE:LED Strip	WEIGHT:Kg
SPEC.:21.6W	DIM.: 1000*10*2(MM)	SERIAL No.:001
MFR.: Flexfire LEDs, Inc.	SUR.:1000*10(MM)	Shielding Angle:120

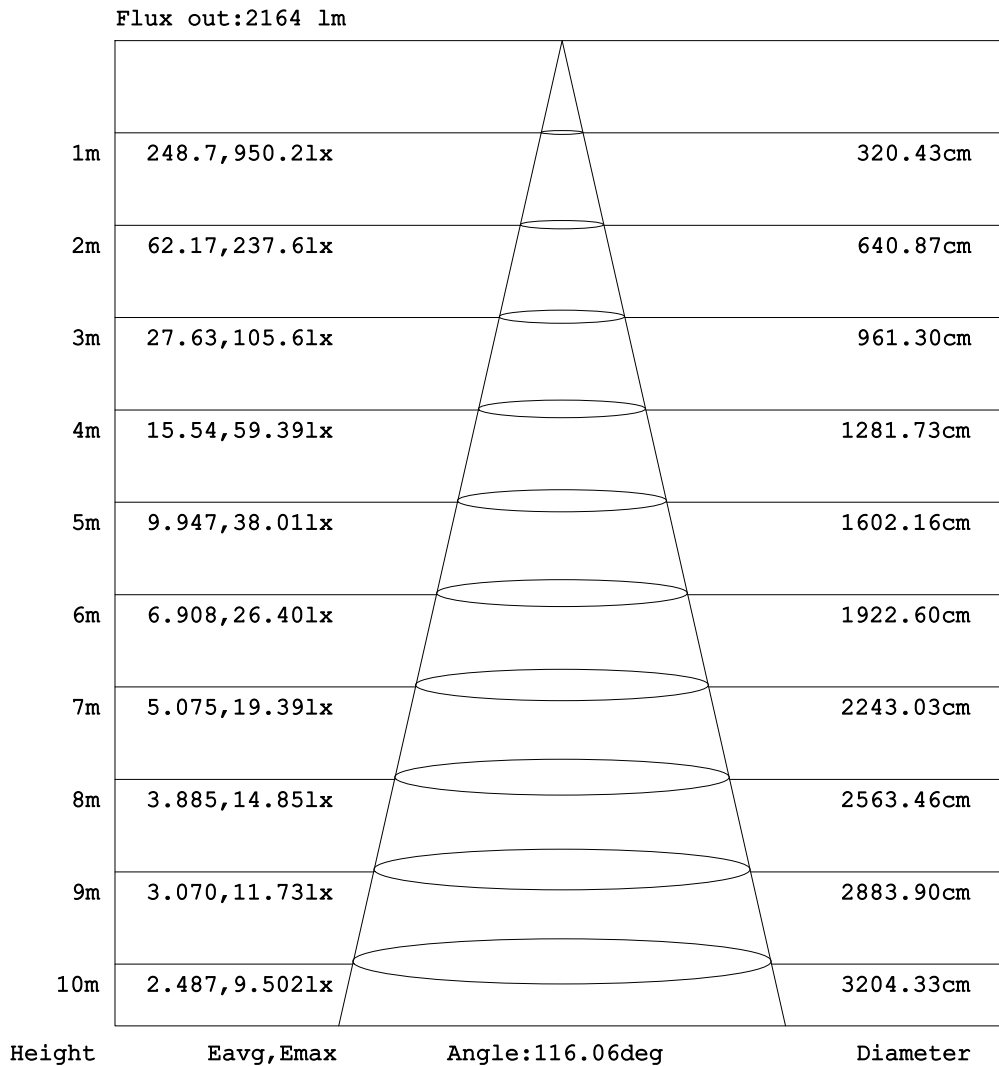


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature: 25.0DEG  
 Test Date: 2020-5-8

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.00.421  
 Humidity: 65.0%  
 Test Distance: 7.000m [K=1.0000]

**ISOLUX DIAGRAM**

Test:U:24.000V I:0.9005A P:21.611W PF:1.0000 Freq:0Hz Lamp Flux:2852.79x1 lm		
NAME: UB-RS-50K95C	TYPE:LED Strip	WEIGHT:Kg
SPEC.:21.6W	DIM.: 1000*10*2 (MM)	SERIAL No.:001
MFR.: Flexfire LEDs, Inc.	SUR.:1000*10 (MM)	Shielding Angle:120

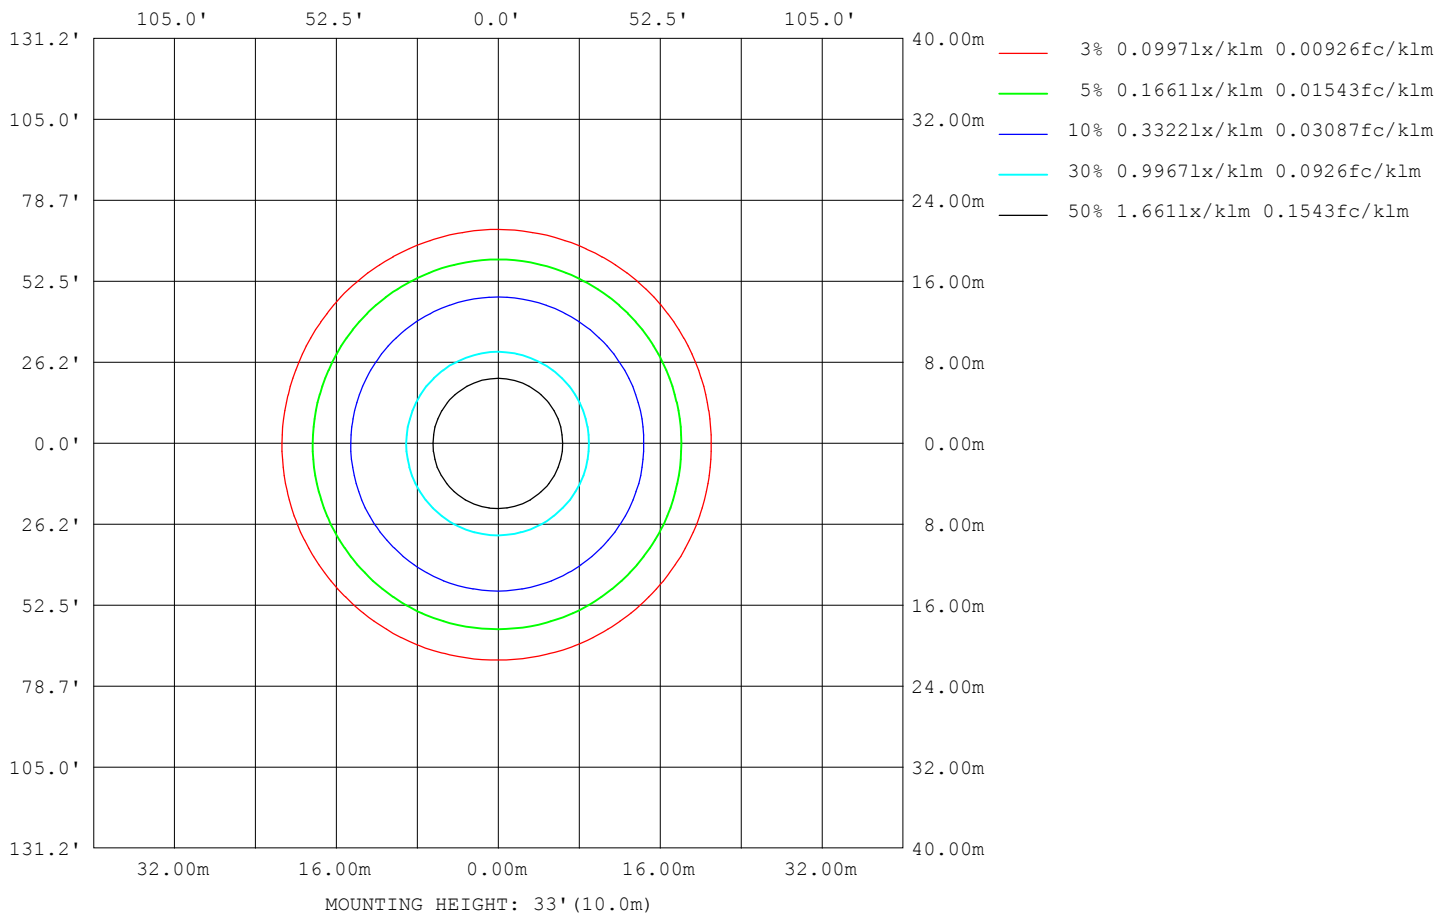

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.0DEG  
 Test Date:2020-5-8

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:7.000m [K=1.0000]

**LED Avg.L Report**

Test:U:24.000V I:0.9005A P:21.611W PF:1.0000 Freq:0Hz Lamp Flux:2852.79x1 lm		
NAME: UB-RS-50K95C	TYPE:LED Strip	WEIGHT:Kg
SPEC.:21.6W	DIM.: 1000*10*2(MM)	SERIAL No.:001
MFR.: Flexfire LEDs, Inc.	SUR.:1000*10(MM)	Shielding Angle:120


AvgL	cd/m2
L_0~180 (65) av	85827
L_0~180 (75) av	73317
L_0~180 (85) av	45174
L_90~270 (65) av	86412
L_90~270 (75) av	73160
L_90~270 (85) av	48776
L_45 (65) av	86203
L_45 (75) av	73853
L_45 (85) av	48740

Standard: GB/T 29293-2012

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.0DEG  
 Test Date:2020-5-8

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:7.000m [K=1.0000]

**Planar Illuminance Curve**

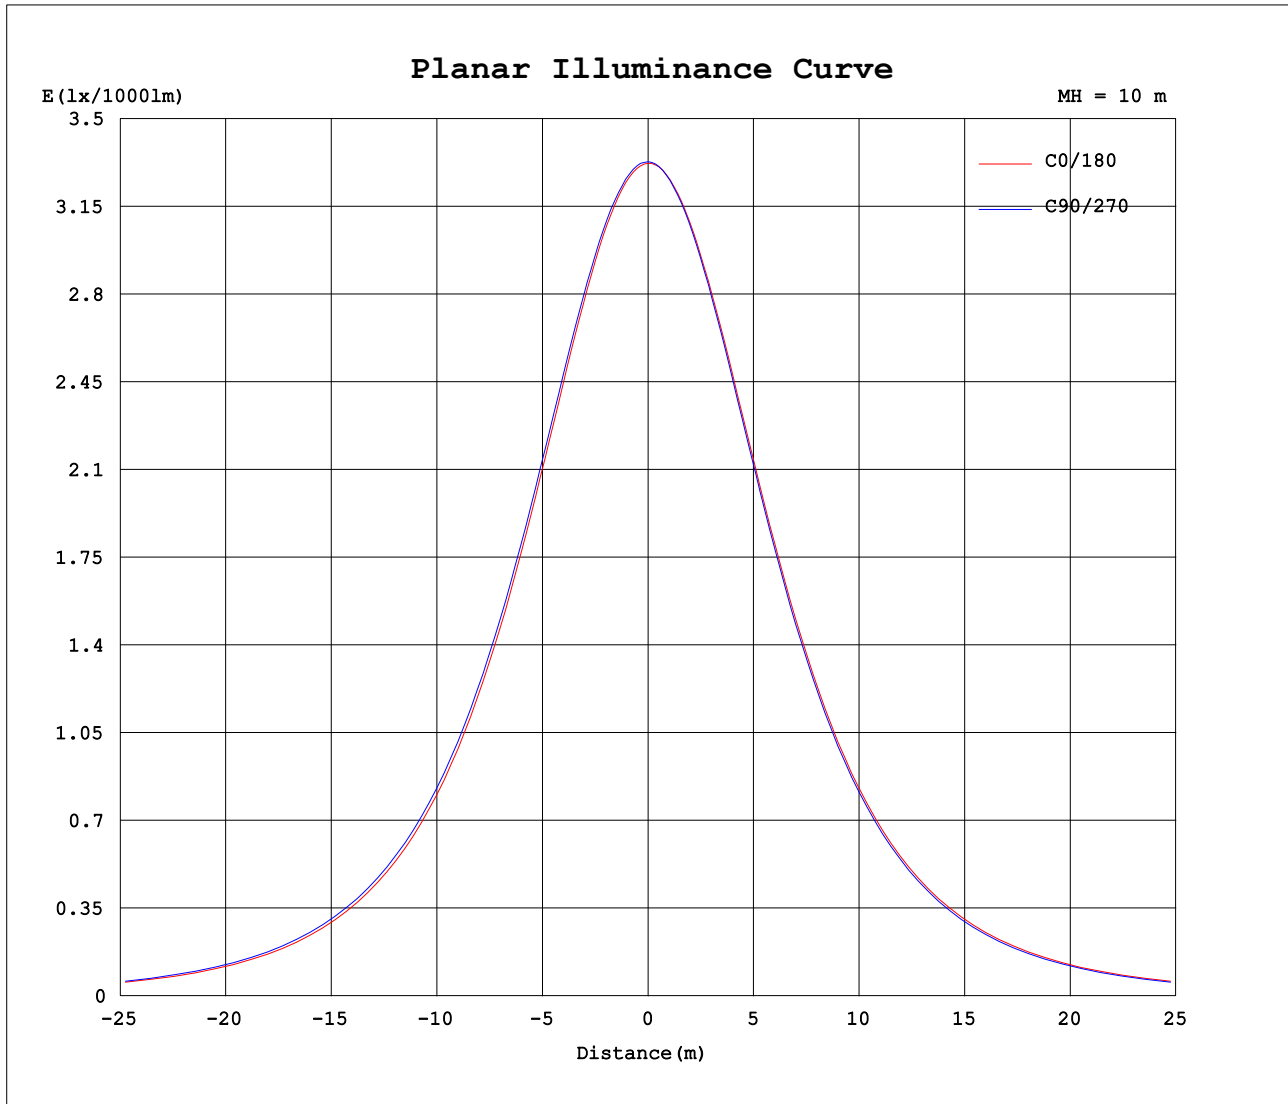

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature: 25.0DEG  
 Test Date: 2020-5-8

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 1.0DEG  
 Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.00.421  
 Humidity: 65.0%  
 Test Distance: 7.000m [K=1.0000]

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:24.000V I:0.9005A P:21.611W PF:1.0000 Freq:0Hz Lamp Flux:2852.79x1 lm		
NAME: UB-RS-50K95C	TYPE:LED Strip	WEIGHT:Kg
SPEC.:21.6W	DIM.: 1000*10*2(MM)	SERIAL No.:001
MFR.: Flexfire LEDs, Inc.	SUR.:1000*10(MM)	Shielding Angle:120

Table--1

UNIT: cd/klm

C (DEG) \ γ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	333	333	333	333	333	333	333	333	333	333	333	333	333	333	333	333			
5	331	331	331	332	332	332	332	332	332	332	332	331	331	331	331	331			
10	327	327	327	328	328	328	329	329	329	328	328	327	327	327	327	327			
15	320	320	321	322	322	323	323	323	323	322	322	321	321	320	320	320			
20	310	311	312	313	314	314	314	314	314	313	313	312	312	311	311	310			
25	299	300	301	302	303	303	303	303	303	302	302	301	300	299	299	299			
30	284	286	287	289	289	290	290	290	290	288	288	287	286	285	285	284			
35	268	269	271	273	274	274	274	274	274	272	272	270	270	268	269	268			
40	249	251	252	254	255	256	256	256	255	254	253	251	251	250	250	249			
45	228	230	232	234	235	236	235	235	235	233	232	230	230	229	229	228			
50	205	207	209	211	212	213	213	212	212	210	209	207	207	206	206	205			
55	179	182	184	186	187	188	187	187	187	185	184	182	181	180	180	180			
60	152	155	157	159	160	161	160	160	160	157	156	154	154	153	153	152			
65	124	126	128	131	131	133	131	131	131	128	127	125	125	124	124	124			
70	93.8	96.6	98.2	101	101	103	101	101	100	97.7	96.7	94.5	93.7	93.3	94.1	93.7			
75	63.7	66.1	68.0	70.5	71.1	72.0	70.6	70.1	69.4	67.1	65.8	64.0	61.6	63.0	63.6	63.6			
80	35.2	37.8	39.6	42.0	42.4	42.9	41.5	40.8	40.0	37.9	37.3	36.0	33.3	34.9	35.5	35.1			
85	12.2	14.5	16.2	18.3	18.4	18.7	17.2	16.3	15.4	14.1	14.5	13.8	11.5	13.1	11.6	11.2			
90	0.97	1.85	2.64	3.52	0.54	4.14	2.89	1.84	1.24	1.57	2.46	2.76	0.58	1.71	1.62	1.11			
95	0.81	0.81	0.95	0.99	0.69	0.77	0.79	0.78	0.65	0.76	0.83	0.79	0.65	0.71	0.75	0.73			
100	0.92	0.85	0.86	0.88	0.91	0.90	0.89	0.89	0.79	0.85	0.87	0.86	0.83	0.80	0.75	0.76			
105	1.08	1.04	1.05	1.09	1.13	1.13	1.12	1.07	0.92	1.00	1.05	1.07	1.02	0.98	0.94	0.90			
110	1.30	1.25	1.27	1.31	1.36	1.36	1.36	1.30	1.12	1.21	1.26	1.28	1.22	1.18	1.14	1.08			
115	1.54	1.48	1.47	1.54	1.59	1.60	1.60	1.55	1.33	1.42	1.48	1.50	1.43	1.39	1.34	1.28			
120	1.77	1.71	1.67	1.76	1.81	1.82	1.82	1.79	1.54	1.65	1.69	1.71	1.63	1.59	1.55	1.50			
125	2.00	1.94	1.94	1.98	2.03	2.04	2.04	2.03	1.77	1.87	1.91	1.92	1.85	1.80	1.77	1.76			
130	2.22	2.15	2.16	2.18	2.22	2.24	2.25	2.24	2.01	2.10	2.14	2.13	2.06	2.01	2.00	2.00			
135	2.42	2.34	2.34	2.35	2.39	2.41	2.43	2.42	2.23	2.30	2.34	2.33	2.26	2.21	2.20	2.21			
140	2.59	2.52	2.52	2.52	2.57	2.58	2.60	2.58	2.43	2.48	2.53	2.47	2.45	2.40	2.38	2.41			
145	2.81	2.74	2.72	2.71	2.75	2.76	2.78	2.78	2.64	2.68	2.71	2.64	2.62	2.59	2.57	2.62			
150	2.98	2.91	2.88	2.86	2.89	2.90	2.93	2.94	2.86	2.87	2.90	2.82	2.80	2.76	2.77	2.83			
155	3.13	3.06	3.02	2.98	3.00	3.02	3.05	3.10	3.00	2.95	2.99	2.95	2.91	2.87	2.89	2.96			
160	3.26	3.18	3.13	3.09	3.10	3.11	3.15	3.17	3.12	3.07	3.06	3.06	3.00	2.98	3.01	3.09			
165	3.37	3.29	3.23	3.17	3.17	3.19	3.23	3.31	3.24	3.17	3.14	3.14	3.09	3.08	3.12	3.21			
170	3.44	3.35	3.29	3.23	3.21	3.23	3.28	3.36	3.27	3.18	3.24	3.19	3.15	3.13	3.17	3.24			
175	3.36	3.28	3.25	3.19	3.17	3.18	3.23	3.30	3.28	3.27	3.29	3.23	3.19	3.19	3.23	3.29			
180	3.24	3.22	3.22	3.17	3.15	3.16	3.19	3.23	3.24	3.22	3.22	3.18	3.15	3.16	3.19	3.24			

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.0DEG  
 Test Date:2020-5-8

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:7.000m [K=1.0000]