


DESKTOP POWER SUPPLY



NOTES & WARNINGS

- Compatible with all Flexfire LED Strip Lights
- Power supply has been designed for indoor use
- To use outdoors, it is required to be installed in a NEMA 3R Enclosure
- Recommended to be installed in a well ventilated area
- Do not puncture or open power supply for any reason
- Not compatible with AC in AC out dimmers such as Lutron, Legrand, Leviton dimmers
- Do not modify (cut, rewire, open) this power supply in any way
- Startup time can take from 1-3 seconds in order to stabilize voltage and extend the life of the power supply

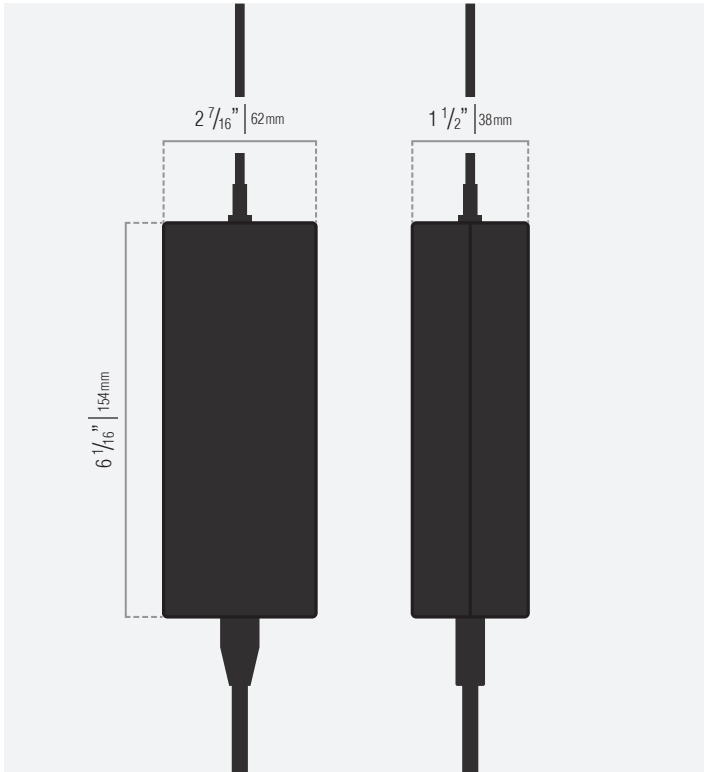

ELECTRICAL PARAMETERS

| | |
|------------------------|---------------------|
| TECHNOLOGY | Electronic |
| INPUT VOLTAGE | 100-240V AC 50/60Hz |
| OUTPUT VOLTAGE | 24VDC |
| WATTAGE | 96 Watts |
| MAX AMPERAGE | 4A |
| PRIMARY BREAKER (AC) | None |
| SECONDARY BREAKER (DC) | None |
| RESET | Automatic |
| LOAD CAPACITY | Up to 80% load |
| KNOCK-OUT HOLES | None |
| EFFICIENCY | 84% |

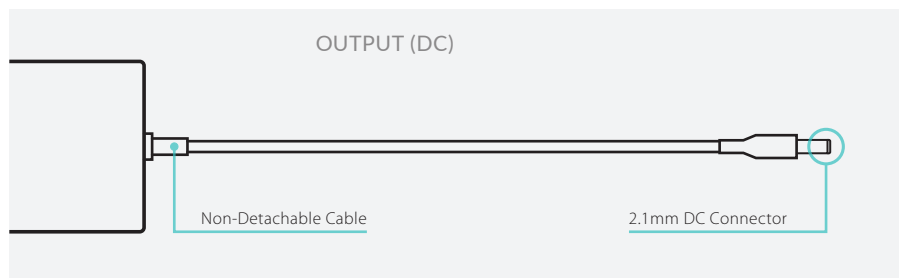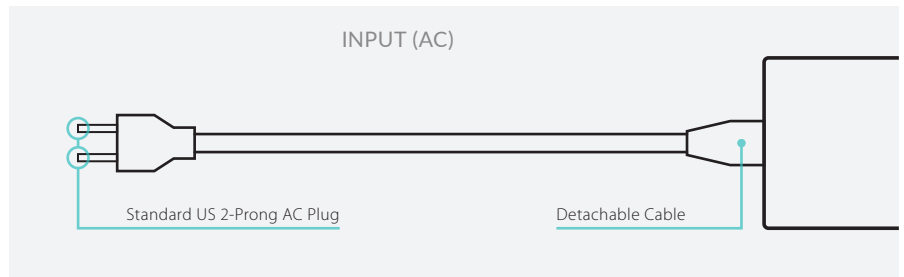

TRANSFORMER

- Power supply is converting AC power to DC power
- Operational Temperature Range: 0°C - 40°C
- DC Cable Length: 4ft - AC Cable Length: 4ft
- Installation Options: Horizontal, Vertical

HOUSING

- Actual transformer is enclosed inside the black plastic casing
- Power supply is made of Black Plastic, Rubber Cords, Silver Plated Connections
- Any altering or modifying of power supply will void warranty